

GOODYEAR

BELTS



CATALOG

INDUSTRIAL
POWER TRANSMISSION

EDITION 2024

V- BELTS

Classic Wrapped A to E Profile	2-10
FHP 3L, 4L/A, 5L/B	11-14
Classic Cogged AX, BX, CX	15-18
Narrow Classic Wrapped 3V, 5V, 8V	19-21
Narrow Classic Cogged 3VX, 5VX, 8VX	22-24
Metric Wrapped SPA - SPZ	25-26
Metric Cogged XPA - XPZ	27-31
Dual Angle Wrapped AA, BB, CC V-Belts	32-34
Dual Angle Cogged AAX, BBX (Chicken Plucker Belts)	35-36
Lawn & Garden	37-40

BANDED V- BELTS


Banded Classic Wrapped A to D Profile	41-75
Banded Classic Cogged BX, CX	76-83
Banded Narrow Wrapped 3V, 5V, 8V	84-101
Banded Narrow Aramid Wrapped 3VK, 5VK, 8VK	102-114
Banded Narrow Cogged 3VX, 5VX, 8VX	115-126

SYNCHRONOUS BELTS

TRAPEZOIDAL TIMING BELTS MXL, XL, L, H, XH, XXH Profile ...	127-130
HTD SYNCHRONOUS BELT	131-133
RPP SYNCHRONOUS BELT	134-137

Classic Wrapped V-Belts, also known as classical V-belts, are a type of power transmission belt commonly used in a wide range of industrial and mechanical applications, such as HVAC systems, agricultural equipment, and more. They are suitable for applications that require moderate to heavy power transmission. Goodyear Classic Wrapped V-Belts are available in various profiles, such as A, B, C, D, or E.

BELT CONSTRUCTION A/B/C/D/E

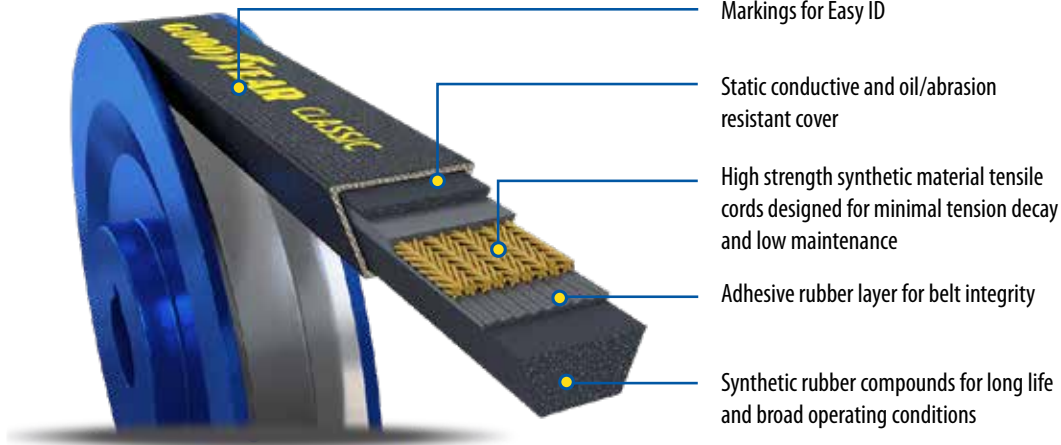

FEATURES & BENEFITS

- **EFFICIENT POWER TRANSMISSION:** Classic Wrapped V-Belts are known for their high power transmission efficiency, making them suitable for a wide range of industrial and mechanical applications.
- **RELIABILITY:** Classic Wrapped belts have a long track record of reliability and durability, which is crucial in applications where consistent performance is required.
- **REDUCED NOISE AND VIBRATION:** The smooth operation of these belts results in lower noise and vibration levels.
- **TEMPERATURE RANGE:** -22°F to 140°F / -30°C to +60°C


BELT PART NUMBER NOMENCLATURE

Belt No: **A100**
A - Profile
100 - Inside Circumference (In)

PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
A	20.9	201.9	533.0	5130.0
B	25.7	474.7	653.0	12058.0
C	47.5	453.5	1206.0	11518.0
D	94.7	664.7	2405.0	16883.0
E*	149.2	603.5	3790.0	15329.0

*Additional Length May Be Available.
 Contact us for more information.

NOTE: Goodyear Classic A (4L) and B (5L) profiles are dual-branded, incorporating both the traditional Classic part number and an FHP (Fractional Horsepower) part number into a single belt line. This dual branding is intended to create a versatile belt that can be used in both classical and fractional horsepower applications.

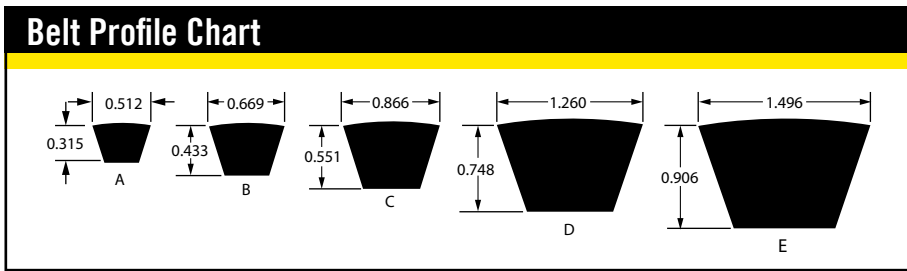


Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
 Copyright 2023 The Goodyear Tire & Rubber Company

CLASSIC WRAPPED BELTS



NOTE: Goodyear Classic A (4L) and B (5L) profiles are dual-branded, incorporating both the traditional Classic part number and an FHP (Fractional Horsepower) part number into a single belt line. This dual branding is intended to create a versatile belt that can be used in both classical and fractional horsepower applications.



BELT PART NUMBER NOMENCLATURE

Belt No: **A100**
A - Profile
100 - Inside Circumference (In)

A / 4L						
Belt No	FHP No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
A16	4L180	18.0	457	18.0	457	0.11
A17	4L190	19.0	483	19.0	483	0.11
A18	4L200	20.0	508	20.0	508	0.11
A19	4L210	20.98	533	21.11	536	0.11
A20	4L220	21.97	558	22.09	561	0.13
A21	4L230	22.95	583	23.08	586	0.13
A22	4L240	23.98	609	24.10	612	0.13
A23	4L250	24.96	634	25.08	637	0.13
A24	4L260	25.98	660	26.11	663	0.15
A25	4L270	26.97	685	27.09	688	0.15
A26	4L280	27.95	710	28.08	713	0.15
A27	4L290	28.98	736	29.10	739	0.18
A28	4L300	29.96	761	30.08	764	0.18
A29	4L310	30.98	787	31.11	790	0.18
A30	4L320	31.97	812	32.09	815	0.18
A31	4L330	32.95	837	33.08	840	0.20
A32	4L340	33.98	863	34.10	866	0.20
A33	4L350	34.96	888	35.08	891	0.20
A34	4L360	35.98	914	36.11	917	0.22
A35	4L370	36.97	939	37.09	942	0.22
A36	4L380	37.95	964	38.08	967	0.22
A37	4L390	38.98	990	39.10	993	0.22
A38	4L400	39.96	1015	40.08	1018	0.24
A39	4L410	40.98	1041	41.11	1044	0.24
A40	4L420	41.97	1066	42.09	1069	0.24
A41	4L430	42.95	1091	43.08	1094	0.24
A42	4L440	43.98	1117	44.10	1120	0.26
A43	4L450	44.96	1142	45.08	1145	0.26
A44	4L460	45.98	1168	46.11	1171	0.26
A45	4L470	46.97	1193	47.09	1196	0.29
A46	4L480	47.95	1218	48.08	1221	0.29
A47	4L490	48.98	1244	49.10	1247	0.29
A48	4L500	49.96	1269	50.08	1272	0.29
A49	4L510	50.98	1295	51.11	1298	0.31
A50	4L520	51.97	1320	52.09	1323	0.31
A51	4L530	52.95	1345	53.08	1348	0.31
A52	4L540	53.98	1371	54.10	1374	0.33
A53	4L550	54.96	1396	55.08	1399	0.33
A54	4L560	55.98	1422	56.11	1425	0.33
A55	4L570	56.97	1447	57.09	1450	0.33
A56	4L580	57.95	1472	58.08	1475	0.35

A / 4L						
Belt No	FHP No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
A57	4L590	58.98	1498	59.10	1501	0.35
A58	4L600	59.96	1523	60.08	1526	0.35
A59	4L610	60.98	1549	61.11	1552	0.35
A60	4L620	61.97	1574	62.09	1577	0.37
A61	4L630	62.95	1599	63.08	1602	0.37
A62	4L640	63.98	1625	64.10	1628	0.37
A63	4L650	64.96	1650	65.08	1653	0.40
A64	4L660	65.98	1676	66.11	1679	0.40
A65	4L670	66.97	1701	67.09	1704	0.40
A66	4L680	67.95	1726	68.08	1729	0.40
A67	4L690	68.98	1752	69.10	1755	0.42
A68	4L700	69.96	1777	70.08	1780	0.42
A69	4L710	70.98	1803	71.11	1806	0.42
A70	4L720	71.97	1828	72.09	1831	0.44
A71	4L730	72.95	1853	73.08	1856	0.44
A72	4L740	73.98	1879	74.10	1882	0.44
A73	4L750	74.96	1904	75.08	1907	0.44
A74	4L760	75.98	1930	76.11	1933	0.46
A75	4L770	76.97	1955	77.09	1958	0.46
A76	4L780	77.95	1980	78.08	1983	0.46
A77	4L790	78.98	2006	79.10	2009	0.49
A78	4L800	79.96	2031	80.08	2034	0.49
A79	4L810	80.98	2057	81.11	2060	0.49
A80	4L820	81.97	2082	82.09	2085	0.49
A81	4L830	82.95	2107	83.08	2110	0.51
A82	4L840	83.98	2133	84.10	2136	0.51
A83	4L850	84.96	2158	85.08	2161	0.51
A84	4L860	85.98	2184	86.11	2187	0.51
A85	4L870	86.97	2209	87.09	2212	0.53
A86	4L880	87.95	2234	88.08	2237	0.53
A87	4L890	88.98	2260	89.10	2263	0.53
A88	4L900	89.96	2285	90.08	2288	0.55
A89	4L910	90.98	2311	91.11	2314	0.55
A90	4L920	91.97	2336	92.09	2339	0.55
A91	4L930	92.95	2361	93.08	2364	0.55
A92	4L940	93.98	2387	94.10	2390	0.57
A93	4L950	94.96	2412	95.08	2415	0.57
A94	4L960	95.98	2438	96.11	2441	0.57
A95	4L970	96.97	2463	97.09	2466	0.60
A96	4L980	97.95	2488	98.08	2491	0.60
A97	4L990	98.98	2514	99.10	2517	0.60
A98	4L1000	99.96	2539	100.08	2542	0.60

A / 4L continued


Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
A99	100.98	2565	101.11	2568	0.62
A100	101.97	2590	102.09	2593	0.62
A101	102.95	2615	103.08	2618	0.62
A102	103.98	2641	104.10	2644	0.62
A103	104.96	2666	105.08	2669	0.64
A104	105.98	2692	106.11	2695	0.64
A105	106.97	2717	107.09	2720	0.64
A106	107.95	2742	108.08	2745	0.66
A107	108.98	2768	109.10	2771	0.66
A108	109.96	2793	110.08	2796	0.66
A109	110.98	2819	111.1	2822	0.67
A110	111.97	2844	112.09	2847	0.68
A111	112.99	2870	113.11	2873	0.68
A112	113.98	2895	114.10	2898	0.68
A113	114.96	2920	115.08	2923	0.71
A114	115.98	2946	116.11	2949	0.71
A115	116.97	2971	117.09	2974	0.71
A116	117.95	2996	118.08	2999	0.71
A117	118.98	3022	119.10	3025	0.73
A118	119.96	3047	120.08	3050	0.73
A119	120.98	3073	121.1	3076	0.74
A120	121.97	3098	122.09	3101	0.75
A121	122.99	3124	123.11	3127	0.76
A122	124.01	3150	124.13	3153	0.76
A124	125.98	3200	126.11	3203	0.77
A125	126.97	3225	127.09	3228	0.77
A127	128.98	3276	129.10	3279	0.77
A128	129.96	3301	130.08	3304	0.79
A130	131.97	3352	132.09	3355	0.79
A132	133.98	3403	134.10	3406	0.82
A133	134.96	3428	135.08	3431	0.82
A134	135.98	3454	136.11	3457	0.82
A135	136.99	3480	137.13	3483	0.84
A136	137.95	3504	138.08	3507	0.84
A137	138.98	3530	139.10	3533	0.84
A140	141.97	3606	142.09	3609	0.86
A144	145.98	3708	146.11	3711	0.88
A145	146.99	3734	147.12	3737	0.89
A148	149.96	3809	150.08	3812	0.90
A150	151.99	3860	152.11	3864	0.92
A152	153.98	3911	154.10	3914	0.93
A156	157.95	4012	158.08	4015	0.97
A157	158.98	4038	159.10	4041	0.97
A158	159.96	4063	160.08	4066	0.97
A162	163.98	4165	164.10	4168	0.99
A167	168.98	4292	169.10	4295	1.04
A173	174.96	4444	175.08	4447	1.06

A continued

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
A180	181.97	4622	182.09	4625	1.10
A187	188.98	4800	189.10	4803	1.15
A197	198.98	5054	199.10	5057	1.21
A200	201.97	5130	202.09	5133	1.23

BELT PART NUMBER NOMENCLATURE

Belt No: **B100**
B - Profile
100 - Inside Circumference (In)



NOTE: Goodyear Classic A (4L) and B (5L) profiles are dual-branded, incorporating both the traditional Classic part number and an FHP (Fractional Horsepower) part number into a single belt line. This dual branding is intended to create a versatile belt that can be used in both classical and fractional horsepower applications.

B / 5L

Belt No	FHP No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
B20	5L230	20.27	515	20.29	515	0.23
B21	5L240	21.28	540	21.29	541	0.23
B22	5L250	22.27	566	22.29	566	0.23
B23	5L260	25.71	653	25.86	657	0.24
B24	5L270	26.73	679	26.88	683	0.24
B25	5L280	27.72	704	27.87	708	0.26
B26	5L290	28.70	729	28.85	733	0.26
B27	5L300	29.72	755	29.87	759	0.29
B28	5L310	30.71	780	30.86	784	0.29
B29	5L320	31.73	806	31.88	810	0.31
B30	5L330	32.72	831	32.87	835	0.31
B31	5L340	33.70	856	33.85	860	0.33
B32	5L350	34.72	882	34.87	886	0.33
B33	5L360	35.71	907	35.86	911	0.35
B34	5L370	36.73	933	36.88	937	0.35
B35	5L380	37.72	958	37.87	962	0.37
B39	5L420	41.73	1060	41.88	1064	0.40
B36	5L390	38.70	983	38.85	987	0.37
B37	5L400	39.72	1009	39.87	1013	0.40
B38	5L410	40.71	1034	40.86	1038	0.40
B40	5L430	42.72	1085	42.87	1089	0.42
B41	5L440	43.70	1110	43.85	1114	0.42
B42	5L450	44.72	1136	44.87	1140	0.44
B43	5L460	45.71	1161	45.86	1165	0.44
B44	5L470	46.73	1187	46.88	1191	0.46
B45	5L480	47.72	1212	47.87	1216	0.46
B46	5L490	48.70	1237	48.85	1241	0.49
B47	5L500	49.72	1263	49.87	1267	0.49

B / 5L continued

Belt No	FHP No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
B48	5L510	50.71	1288	50.86	1292	0.51
B49	5L520	51.73	1314	51.88	1318	0.51
B50	5L530	52.72	1339	52.87	1343	0.53
B51	5L540	53.70	1364	53.85	1368	0.53
B52	5L550	54.72	1390	54.87	1394	0.55
B53	5L560	55.71	1415	55.86	1419	0.55
B54	5L570	56.73	1441	56.88	1445	0.57
B55	5L580	57.72	1466	57.87	1470	0.57
B56	5L590	58.70	1491	58.85	1495	0.60
B57	5L600	59.72	1517	59.87	1521	0.60
B58	5L610	60.71	1542	60.86	1546	0.60
B59	5L620	61.73	1568	61.88	1572	0.62
B60	5L630	62.72	1593	62.87	1597	0.62
B61	5L640	63.70	1618	63.85	1622	0.64
B62	5L650	64.72	1644	64.87	1648	0.64
B63	5L660	65.71	1669	65.86	1673	0.66
B64	5L670	66.73	1695	66.88	1699	0.66
B65	5L680	67.72	1720	67.87	1724	0.68
B66	5L690	68.70	1745	68.85	1749	0.68
B67	5L700	69.72	1771	69.87	1775	0.71
B68	5L710	70.71	1796	70.86	1800	0.71
B69	5L720	71.73	1822	71.88	1826	0.73
B70	5L730	72.72	1847	72.87	1851	0.73
B71	5L740	73.70	1872	73.85	1876	0.75
B72	5L750	74.72	1898	74.87	1902	0.75
B73	5L760	75.71	1923	75.86	1927	0.77
B74	5L770	76.73	1949	76.88	1953	0.77
B75	5L780	77.72	1974	77.87	1978	0.79
B75.5		77.72	1974	77.87	1978	0.79
B76	5L790	78.70	1999	78.85	2003	0.79
B77	5L800	79.72	2025	79.87	2029	0.79
B78	5L810	80.71	2050	80.86	2054	0.82
B79	5L820	81.73	2076	81.88	2080	0.82
B80	5L830	82.72	2101	82.87	2105	0.84
B81	5L840	83.70	2126	83.85	2130	0.84
B82	5L850	84.72	2152	84.87	2156	0.86
B83	5L860	85.71	2177	85.86	2181	0.86
B84	5L870	86.73	2203	86.88	2207	0.88
B85	5L880	87.72	2228	87.87	2232	0.88
B86	5L890	88.70	2253	88.85	2257	0.90
B87	5L900	89.72	2279	89.87	2283	0.90
B88	5L910	90.71	2304	90.86	2308	0.93
B89	5L920	91.73	2330	91.88	2334	0.93
B90	5L930	92.72	2355	92.87	2359	0.95
B91	5L940	93.70	2380	93.85	2384	0.95
B92	5L950	94.72	2406	94.87	2410	0.97
B93	5L960	95.71	2431	95.86	2435	0.97

B / 5L continued

Belt No	FHP No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
B94	5L970	96.73	2457	96.88	2461	0.99
B95	5L980	97.72	2482	97.87	2486	0.99
B96	5L990	98.70	2507	98.85	2511	0.99
B97	5L1000	99.72	2533	99.87	2537	1.01
B98		100.71	2558	100.86	2562	1.01
B99		101.73	2584	101.88	2588	1.04
B100		102.72	2609	102.87	2613	1.04
B101		103.70	2634	103.85	2638	1.06
B102		104.72	2660	104.87	2664	1.06
B103		105.71	2685	105.86	2689	1.08
B104		106.73	2711	106.88	2715	1.08
B105		107.72	2736	107.87	2740	1.10
B106		108.70	2761	108.85	2765	1.10
B107		109.72	2787	109.87	2791	1.12
B108		110.71	2812	110.86	2816	1.12
B109		111.73	2838	111.88	2842	1.15
B110		112.72	2863	112.87	2867	1.15
B111		113.70	2888	113.85	2892	1.17
B112		114.72	2914	114.87	2918	1.17
B113		115.71	2939	115.86	2943	1.19
B114		116.73	2965	116.88	2969	1.19
B115		117.72	2990	117.87	2994	1.21
B116		118.70	3015	118.85	3019	1.21
B117		119.72	3041	119.87	3045	1.21
B118		120.71	3066	120.86	3070	1.23
B119		121.73	3092	121.88	3096	1.23
B120		122.72	3117	122.87	3121	1.26
B121		123.74	3143	123.89	3147	1.27
B122		124.72	3168	124.87	3172	1.28
B123		125.71	3193	125.86	3197	1.28
B124		126.73	3219	126.88	3223	1.30
B125		127.72	3244	127.87	3248	1.30
B126		128.70	3269	128.85	3273	1.32
B127		129.72	3295	129.87	3299	1.32
B128		130.71	3320	130.86	3324	1.35
B129		131.73	3346	131.88	3350	1.36
B130		132.72	3371	132.87	3375	1.37
B131		133.70	3396	133.85	3400	1.37
B132		134.72	3422	134.87	3426	1.39
B133		135.71	3447	135.86	3451	1.39
B134		136.73	3473	136.88	3477	1.41
B135		137.72	3498	137.87	3502	1.41
B136		138.70	3523	138.85	3527	1.41
B137		139.72	3549	139.87	3553	1.43
B138		140.71	3574	140.86	3578	1.43
B139		141.73	3600	141.88	3604	1.46
B140		142.72	3625	142.87	3629	1.46

B continued


Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
B141	143.70	3650	143.85	3654	1.48
B142	144.72	3676	144.87	3680	1.48
B143	145.71	3701	145.86	3705	1.50
B144	146.73	3727	146.88	3731	1.50
B145	147.72	3752	147.87	3756	1.52
B146	148.70	3777	148.85	3781	1.52
B147	149.72	3803	149.87	3807	1.54
B148	150.71	3828	150.86	3832	1.54
B149	151.73	3854	151.88	3858	1.57
B150	152.72	3879	152.87	3883	1.57
B151	153.70	3904	153.85	3908	1.59
B152	154.72	3930	154.87	3934	1.59
B153	155.71	3955	155.86	3959	1.61
B154	156.73	3981	156.88	3985	1.61
B155	157.75	4007	157.9	4011	1.63
B156	158.70	4031	158.85	4035	1.63
B157	159.72	4057	159.87	4061	1.63
B158	160.71	4082	160.86	4086	1.65
B159	161.73	4108	161.88	4112	1.66
B160	162.72	4133	162.87	4137	1.68
B161	163.70	4158	163.85	4162	1.68
B162	164.72	4184	164.87	4188	1.70
B163	165.74	4210	165.89	4214	1.70
B164	166.73	4235	166.88	4239	1.72
B165	167.72	4260	167.87	4264	1.72
B166	168.70	4285	168.85	4289	1.74
B167	169.72	4311	169.87	4315	1.74
B168	170.71	4336	170.86	4340	1.76
B169	171.73	4362	171.88	4366	1.76
B170	172.72	4387	172.87	4391	1.79
B171	173.74	4413	173.89	4417	1.81
B172	174.72	4438	174.87	4442	1.81
B173	175.71	4463	175.86	4467	1.81
B174	176.73	4489	176.88	4493	1.81
B175	177.72	4514	177.87	4518	1.83
B176	178.74	4540	178.89	4544	1.83
B177	179.72	4565	179.87	4569	1.85
B178	180.71	4590	180.86	4594	1.85
B179	181.73	4616	181.88	4620	1.87
B180	182.72	4641	182.87	4645	1.87
B182	184.72	4692	184.87	4696	1.90
B184	186.73	4743	186.88	4747	1.92
B185	187.72	4768	187.87	4772	1.94
B186	188.70	4793	188.85	4797	1.94
B187	189.72	4819	189.87	4823	1.96
B188	190.71	4844	190.86	4848	1.96
B190	192.72	4895	192.87	4899	1.98

B continued

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
B191	193.70	4920	193.85	4924	2.01
B192	194.72	4946	194.87	4950	2.01
B194	196.75	4998	196.9	5002	2.03
B195	197.72	5022	197.87	5026	2.03
B196	198.73	5048	198.88	5052	2.03
B197	199.72	5073	199.87	5077	2.05
B198	200.73	5099	200.88	5103	2.05
B199	201.73	5124	201.88	5128	2.07
B200	202.72	5149	202.87	5153	2.09
B201	203.70	5174	203.85	5178	2.09
B204	206.73	5251	206.88	5255	2.14
B205	207.72	5276	207.87	5280	2.14
B206	208.70	5301	208.85	5305	2.16
B210	212.72	5403	212.87	5407	2.21
B212	214.72	5454	214.87	5458	2.21
B215	217.72	5530	217.87	5534	2.25
B217	219.72	5581	219.87	5585	2.27
B218	220.71	5606	220.86	5610	2.27
B220	222.72	5657	222.87	5661	2.29
B221	223.70	5682	223.85	5686	2.32
B223	225.71	5733	225.86	5737	2.34
B225	227.72	5784	227.87	5788	2.36
B228	230.71	5860	230.86	5864	2.38
B230	232.72	5911	232.87	5915	2.40
B234	236.73	6013	236.88	6017	2.45
B235	237.72	6038	237.87	6042	2.45
B236	238.70	6063	238.85	6067	2.47
B237	239.72	6089	239.87	6093	2.47
B237	239.72	6089	239.87	6093	2.47
B240	242.72	6165	242.87	6169	2.51
B245	247.78	6293	247.93	6298	2.51
B248	250.71	6368	250.86	6372	2.60
B253	255.71	6495	255.86	6499	2.65
B255	257.72	6546	257.87	6550	2.67
B260	262.8	6674	262.9	6678	2.78
B265	267.72	6800	267.87	6804	2.78
B270	272.72	6927	272.87	6931	2.82
B276	278.70	7079	278.85	7083	2.89
B279	281.73	7156	281.88	7160	2.91
B248	250.71	6368	250.86	6372	2.60
B253	255.71	6495	255.86	6499	2.65
B255	257.72	6546	257.87	6550	2.67
B260	262.8	6674	262.9	6678	2.78
B265	267.72	6800	267.87	6804	2.78
B270	272.72	6927	272.87	6931	2.82
B276	278.70	7079	278.85	7083	2.89
B279	281.73	7156	281.88	7160	2.91

B continued

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
B280	282.72	7181	282.87	7185	2.93
B285	287.72	7308	287.87	7312	2.98
B290	292.72	7435	292.87	7439	3.02
B292	294.72	7486	294.87	7490	3.04
B293	295.71	7511	295.86	7515	3.06
B300	302.72	7689	302.87	7693	3.13
B310	312.72	7943	312.87	7947	3.24
B315	317.72	8070	317.87	8074	3.29
B330	332.72	8451	332.87	8455	3.44
B340	342.72	8705	342.87	8709	3.55
B345	347.72	8832	347.87	8836	3.62
B355	357.72	9086	357.87	9090	3.70
B360	362.72	9213	362.87	9217	3.77
B394	396.73	10077	396.88	10081	4.12
B433	435.71	11067	435.86	11071	4.52
B472	474.72	12058	474.87	12062	4.94



BELT PART NUMBER NOMENCLATURE

Belt No: **C100**
C - Profile
100 - Inside Circumference (In)

C

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
C43	43.35	1101	43.4	1102	0.79
C44	47.48	1206	47.78	1214	0.79
C45	48.46	1231	48.76	1238	0.79
C46	49.45	1256	49.85	1266	0.82
C47	50.47	1282	50.87	1292	0.84
C48	51.46	1307	51.86	1317	0.86
C49	52.48	1333	52.88	1343	0.88
C50	53.46	1358	53.86	1368	0.88
C51	54.45	1383	54.85	1393	0.90
C52	55.47	1409	55.87	1419	0.93
C53	56.46	1434	56.86	1444	0.95
C54	57.48	1460	57.88	1470	0.97
C55	58.46	1485	58.86	1495	0.99
C56	59.45	1510	59.85	1520	0.99
C57	60.47	1536	60.87	1546	1.01
C58	61.46	1561	61.86	1571	1.04
C59	62.48	1587	62.88	1597	1.06
C60	63.46	1612	63.86	1622	1.08
C61	64.45	1637	64.85	1647	1.08
C62	65.47	1663	65.87	1673	1.10

C

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
C63	66.46	1688	66.86	1698	1.12
C64	67.48	1714	67.88	1724	1.15
C65	68.46	1739	68.86	1749	1.17
C66	69.45	1764	69.85	1774	1.17
C67	70.47	1790	70.87	1800	1.19
C68	71.46	1815	71.86	1825	1.21
C69	72.48	1841	72.88	1851	1.23
C70	73.46	1866	73.86	1876	1.26
C71	74.45	1891	74.85	1901	1.26
C72	75.47	1917	75.87	1927	1.28
C73	76.46	1942	76.86	1952	1.30
C74	77.48	1968	77.88	1978	1.32
C75	78.46	1993	78.86	2003	1.35
C76	79.45	2018	79.85	2028	1.35
C77	80.47	2044	80.87	2054	1.37
C78	81.46	2069	81.86	2079	1.39
C79	82.48	2095	82.88	2105	1.41
C80	83.46	2120	83.86	2130	1.43
C81	84.45	2145	84.85	2155	1.46
C82	85.47	2171	85.87	2181	1.46
C83	86.46	2196	86.86	2206	1.48
C84	87.48	2222	87.88	2232	1.50
C85	88.46	2247	88.86	2257	1.52
C86	89.45	2272	89.85	2282	1.54
C87	90.47	2298	90.87	2308	1.54
C88	91.46	2323	91.86	2333	1.57
C89	92.48	2349	92.88	2359	1.59
C90	93.46	2374	93.86	2384	1.61
C91	94.45	2399	94.85	2409	1.63
C92	95.47	2425	95.87	2435	1.63
C93	96.46	2450	96.86	2460	1.65
C94	97.48	2476	97.88	2486	1.68
C95	98.46	2501	98.86	2511	1.70
C96	99.45	2526	99.85	2536	1.72
C97	100.47	2552	100.87	2562	1.72
C98	101.46	2577	101.86	2587	1.74
C99	102.48	2603	102.88	2613	1.76
C100	103.46	2628	103.86	2638	1.79
C101	104.45	2653	104.85	2663	1.81
C102	105.47	2679	105.87	2689	1.83
C103	106.46	2704	106.86	2714	1.83
C104	107.48	2730	107.88	2740	1.85
C105	108.46	2755	108.86	2765	1.87
C106	109.45	2780	109.85	2790	1.90
C107	110.47	2806	110.87	2816	1.92
C108	111.46	2831	111.86	2841	1.92
C109	112.48	2857	112.88	2867	1.94

C continued					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
C110	113.46	2882	113.86	2892	1.96
C111	114.45	2907	114.85	2917	1.98
C112	115.47	2933	115.87	2943	2.01
C113	116.46	2958	116.86	2968	2.01
C114	117.48	2984	117.88	2994	2.03
C115	118.46	3009	118.86	3019	2.05
C116	119.45	3034	119.85	3044	2.07
C117	120.47	3060	120.87	3070	2.09
C118	121.46	3085	121.86	3095	2.09
C119	122.48	3111	122.88	3121	2.12
C93	96.46	2450	96.86	2460	1.65
C94	97.48	2476	97.88	2486	1.68
C95	98.46	2501	98.86	2511	1.70
C96	99.45	2526	99.85	2536	1.72
C97	100.47	2552	100.87	2562	1.72
C98	101.46	2577	101.86	2587	1.74
C99	102.48	2603	102.88	2613	1.76
C100	103.46	2628	103.86	2638	1.79
C101	104.45	2653	104.85	2663	1.81
C102	105.47	2679	105.87	2689	1.83
C103	106.46	2704	106.86	2714	1.83
C104	107.48	2730	107.88	2740	1.85
C105	108.46	2755	108.86	2765	1.87
C106	109.45	2780	109.85	2790	1.90
C107	110.47	2806	110.87	2816	1.92
C108	111.46	2831	111.86	2841	1.92
C109	112.48	2857	112.88	2867	1.94
C93	96.46	2450	96.86	2460	1.65
C94	97.48	2476	97.88	2486	1.68
C95	98.46	2501	98.86	2511	1.70
C96	99.45	2526	99.85	2536	1.72
C97	100.47	2552	100.87	2562	1.72
C98	101.46	2577	101.86	2587	1.74
C99	102.48	2603	102.88	2613	1.76
C100	103.46	2628	103.86	2638	1.79
C101	104.45	2653	104.85	2663	1.81
C102	105.47	2679	105.87	2689	1.83
C103	106.46	2704	106.86	2714	1.83
C104	107.48	2730	107.88	2740	1.85
C105	108.46	2755	108.86	2765	1.87
C106	109.45	2780	109.85	2790	1.90
C107	110.47	2806	110.87	2816	1.92
C108	111.46	2831	111.86	2841	1.92
C109	112.48	2857	112.88	2867	1.94
C110	113.46	2882	113.86	2892	1.96
C111	114.45	2907	114.85	2917	1.98
C112	115.47	2933	115.87	2943	2.01


C continued					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
C113	116.46	2958	116.86	2968	2.01
C114	117.48	2984	117.88	2994	2.03
C115	118.46	3009	118.86	3019	2.05
C116	119.45	3034	119.85	3044	2.07
C117	120.47	3060	120.87	3070	2.09
C118	121.46	3085	121.86	3095	2.09
C119	122.48	3111	122.88	3121	2.12
C120	123.46	3136	123.86	3146	2.14
C121	124.45	3161	124.85	3171	2.16
C122	125.47	3187	125.87	3197	2.18
C123	126.46	3212	126.86	3222	2.21
C124	127.48	3238	127.88	3248	2.21
C125	128.46	3263	128.86	3273	2.23
C126	129.45	3288	129.85	3298	2.25
C127	130.47	3314	130.87	3324	2.27
C128	131.46	3339	131.86	3349	2.29
C130	133.46	3390	133.86	3400	2.32
C131	134.45	3415	134.85	3425	2.34
C132	135.47	3441	135.87	3451	2.36
C133	136.46	3466	136.86	3476	2.38
C134	137.48	3492	137.88	3502	2.38
C135	138.46	3517	138.86	3527	2.40
C136	139.45	3542	139.85	3552	2.43
C137	140.47	3568	140.87	3578	2.45
C138	141.46	3593	141.86	3603	2.47
C139	142.48	3619	142.88	3629	2.47
C140	143.46	3644	143.86	3654	2.49
C141	144.45	3669	144.85	3679	2.51
C142	145.47	3695	145.87	3705	2.54
C143	146.46	3720	146.86	3730	2.56
C144	147.48	3746	147.88	3756	2.58
C145	148.46	3771	148.86	3781	2.58
C146	149.45	3796	149.85	3806	2.60
C147	150.47	3822	150.87	3832	2.62
C148	151.46	3847	151.86	3857	2.65
C149	152.48	3873	152.88	3883	2.67
C150	153.46	3898	153.86	3908	2.67
C151	154.45	3923	154.85	3933	2.69
C152	155.47	3949	155.87	3959	2.71
C153	156.46	3974	156.86	3984	2.73
C154	157.48	4000	157.88	4010	2.76
C155	158.46	4025	158.86	4035	2.76
C156	159.45	4050	159.85	4060	2.78
C157	160.47	4076	160.87	4086	2.80
C158	161.46	4101	161.86	4111	2.82
C160	163.46	4152	163.86	4162	2.84
C161	163.46	4152	163.86	4162	2.84

C continued					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
C162	165.47	4203	165.87	4213	2.89
C164	167.48	4254	167.88	4264	2.93
C165	168.46	4279	168.86	4289	2.93
C166	169.45	4304	169.85	4314	2.95
C167	170.47	4330	170.87	4340	2.98
C168	171.46	4355	171.86	4365	3.00
C169	172.48	4381	172.88	4391	3.02
C170	173.46	4406	173.86	4416	3.04
C172	175.5	4458	175.91	4468	3.06
C173	176.46	4482	176.86	4492	3.09
C175	178.46	4533	178.86	4543	3.13
C176	179.45	4558	179.85	4568	3.13
C177	180.47	4584	180.87	4594	3.15
C178	181.46	4609	181.86	4619	3.18
C180	183.46	4660	183.86	4670	3.22
C181	184.45	4685	184.85	4695	3.22
C182	185.47	4711	185.87	4721	3.24
C183	186.46	4736	186.86	4746	3.26
C184	187.48	4762	187.88	4772	3.29
C185	188.46	4787	188.86	4797	3.31
C187	190.47	4838	190.87	4848	3.33
C188	191.46	4863	191.86	4873	3.35
C189	192.48	4889	192.88	4899	3.37
C190	193.46	4914	193.86	4924	3.40
C192	195.5	4966	195.9	4976	3.42
C193	196.46	4990	196.86	5000	3.44
C195	198.46	5041	198.86	5051	3.48
C196	199.48	5067	199.88	5077	3.50
C197	200.47	5092	200.87	5102	3.51
C198	201.46	5117	201.86	5127	3.53
C200	203.46	5168	203.86	5178	3.57
C202	205.47	5219	205.87	5229	3.59
C204	207.48	5270	207.88	5280	3.64
C205	208.46	5295	208.86	5305	3.66
C206	209.45	5320	209.85	5330	3.68
C207	210.47	5346	210.87	5356	3.68
C208	211.46	5371	211.86	5381	3.70
C210	213.46	5422	213.86	5432	3.75
C198	201.46	5117	201.86	5127	3.53
C200	203.46	5168	203.86	5178	3.57
C202	205.47	5219	205.87	5229	3.59
C204	207.48	5270	207.88	5280	3.64
C205	208.46	5295	208.86	5305	3.66
C206	209.45	5320	209.85	5330	3.68
C207	210.47	5346	210.87	5356	3.68
C208	211.46	5371	211.86	5381	3.70
C210	213.46	5422	213.86	5432	3.75

C continued					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
C214	217.48	5524	217.88	5534	3.81
C215	218.46	5549	218.86	5559	3.84
C218	221.46	5625	221.86	5635	3.88
C220	223.46	5676	223.86	5686	3.92
C221	224.45	5701	224.85	5711	3.95
C225	228.46	5803	228.86	5813	4.01
C228	231.46	5879	231.86	5889	4.06
C229	232.48	5905	232.88	5915	4.08
C230	233.46	5930	233.86	5940	4.10
C235	238.46	6057	238.86	6067	4.19
C238	241.46	6133	241.86	6143	4.26
C240	243.46	6184	243.86	6194	4.28
C245	248.46	6311	248.86	6321	4.37
C246	249.45	6336	249.85	6346	4.39
C248	251.46	6387	251.86	6397	4.43
C250	253.46	6438	253.86	6448	4.45
C255	258.46	6565	258.86	6575	4.54
C260	263.53	6694	263.94	6704	4.65
C264	267.48	6794	267.88	6804	4.72
C265	268.46	6819	268.86	6829	4.72
C270	273.46	6946	273.86	6956	4.81
C275	278.46	7073	278.86	7083	4.90
C276	279.45	7098	279.85	7108	4.92
C280	283.46	7200	283.86	7210	5.01
C285	288.46	7327	288.86	7337	5.09
C290	293.46	7454	293.86	7464	5.18
C295	298.46	7581	298.86	7591	5.27
C297	300.47	7632	300.87	7642	5.29
C300	303.46	7708	303.86	7718	5.36
C303	306.46	7784	306.86	7794	5.40
C312	317.48	8064	317.88	8074	5.60
C314	317.48	8064	317.88	8074	5.60
C315	318.46	8089	318.86	8099	5.62
C320	323.46	8216	323.86	8226	5.71
C330	333.46	8470	333.86	8480	5.89
C345	348.46	8851	348.86	8861	6.15
C360	363.46	9232	363.86	9242	6.42
C390	393.46	9994	393.86	10004	6.97
C420	423.46	10756	423.86	10766	7.50
C450	453.46	11518	453.86	11528	8.03


*Additional Length May Be Available.
Contact us for more information.

CLASSIC WRAPPED BELTS



BELT PART NUMBER NOMENCLATURE

Belt No: **D100**
D - Profile
100 - Inside Circumference (In)



BELT PART NUMBER NOMENCLATURE

Belt No: **E100**
E - Profile
100 - Inside Circumference (In)

D

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
D90	94.69	2405	95.08	2415	3.24
D98	102.68	2608	103.07	2618	3.53
D104	108.70	2761	108.90	2766	3.75
D105	109.69	2786	109.88	2791	3.79
D107	111.69	2837	111.89	2842	3.86
D108	112.68	2862	112.88	2867	3.88
D110	114.69	2913	114.88	2918	3.97
D112	116.69	2964	116.89	2969	4.04
D120	124.69	3167	124.88	3172	4.32
D124	128.70	3269	128.90	3274	4.48
D128	132.68	3370	132.88	3375	4.61
D132	136.69	3472	136.89	3477	4.76
D135	139.69	3548	139.88	3553	4.87
D136	140.67	3573	140.87	3578	4.90
D140	144.69	3675	144.88	3680	5.05
D144	148.70	3777	148.90	3782	5.18
D148	152.68	3878	152.88	3883	5.34
D152	156.69	3980	156.89	3985	5.47
D154	158.70	4031	158.90	4036	5.56
D158	162.68	4132	162.88	4137	5.69
D160	164.69	4183	164.88	4188	5.76
D162	166.69	4234	166.89	4239	5.84
D90	94.69	2405	95.08	2415	3.24
D98	102.68	2608	103.07	2618	3.53
D315	319.69	8120	319.88	8125	11.36
D330	334.69	8501	334.88	8506	11.88
D335	339.69	8628	339.88	8633	12.06
D345	349.69	8882	349.88	8887	12.44
D354	358.70	9111	358.90	9116	12.77
D360	364.69	9263	364.88	9268	12.97
D390	394.69	10025	394.88	10030	14.05
D394	398.70	10127	398.90	10132	14.20
D420	424.69	10787	424.88	10792	15.13
D441	445.67	11320	445.87	11325	15.90
D450	454.69	11549	454.88	11554	16.21
D480	484.69	12311	484.88	12316	17.29
D540	544.69	13835	544.88	13840	19.45
D600	604.69	15359	604.88	15364	21.63
D660	664.69	16883	664.88	16888	23.79

E

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
E144	149.72	3803	150.00	3810	7.70
E158	163.70	4158	163.97	4165	8.45
E180	185.71	4717	185.98	4724	9.61
E195	200.71	5098	200.98	5105	10.43
E210	215.71	5479	215.98	5486	11.22
E240	245.71	6241	245.98	6248	12.83
E250	255.71	6495	255.98	6502	13.36
E270	275.71	7003	275.98	7010	14.42
E300	305.71	7765	305.98	7772	16.03
E310	315.71	8019	315.98	8026	16.56
E330	335.71	8527	335.98	8534	17.64
E360	365.71	9289	365.98	9296	19.25
E390	395.71	10051	395.98	10058	20.84
E420	425.71	10813	425.98	10820	22.45
E441	446.69	11346	446.97	11353	23.57
E460	465.71	11829	465.98	11836	24.59
E480	485.71	12337	485.98	12344	25.67
E540	545.71	13861	545.98	13868	28.86
E600	605.71	15385	605.98	15392	32.06
E660	665.71	16909	665.98	16916	35.28

*Additional Length May Be Available.
 Contact us for more information.




FRACTIONAL HORSEPOWER (FHP) V-BELTS



Goodyear Belts Fractional Horsepower line is designed to provide excellent durability and service for your equipment and machinery drive requirements. Fractional horsepower V-belts are used in a wide range of applications, including small machines, appliances, power tools, and other equipment with electric motors rated below 1 horsepower.

BELT CONSTRUCTION 3L/4LA/5LB

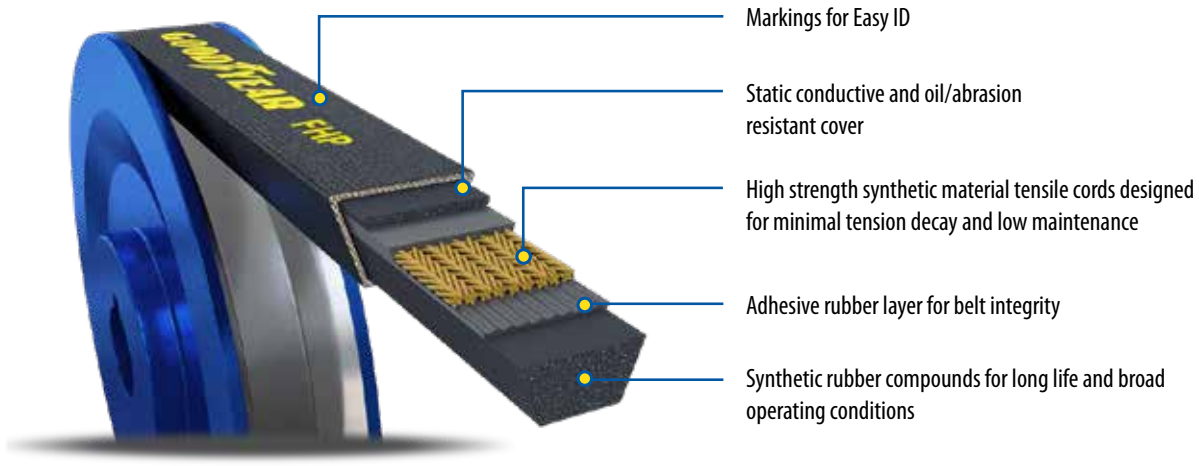

FEATURES & BENEFITS

- Special CR treated outer jacketing fabric for higher durability.
- Anti-static, oil & heat resistant.
- High strength cords for minimal tension decay.
- Maximum belt linear speed 90 ft/second.
- **TEMPERATURE RANGE:**
- 0° F to 176° F / -18°C to 80°C


BELT PART NUMBER NOMENCLATURE

Belt No: **3L200**
3L - Profile
200 - Outside Circumference (Inches in tenths: 20.0")

PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
3L	18.00	74.0	457	1880
4L/A	17.78	1008	452	2542
5L/B	22.87	99.87	578	2537

*Additional Length May Be Available.
Contact us for more information.

NOTE: Goodyear Classic A (4L) & B (5L) profiles are Dual branded with the traditional Classic part number as well as FHP part number into a single belt line that can handle both classical and FHP applications.

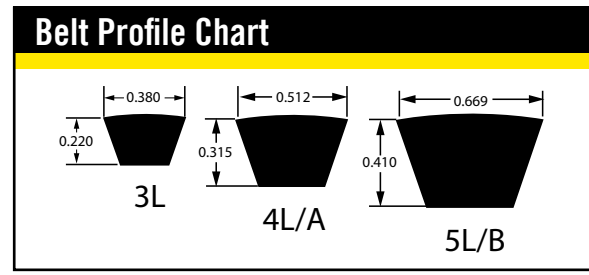


Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
Copyright 2023 The Goodyear Tire & Rubber Company

FRACTIONAL HORSEPOWER (FHP) V-BELTS



BELT PART NUMBER NOMENCLATURE




Belt No: **3L200**
3L - Profile
200 - Outside Circumference
(Inches in tenths: 20.0")

3L					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
3L180	18.0	457	18.0	457	0.061
3L190	19.0	483	19.0	483	0.065
3L200	20.0	508	20.0	508	0.068
3L210	21.0	533	21.0	533	0.071
3L220	22.0	559	22.0	559	0.075
3L230	23.0	584	23.0	584	0.078
3L240	24.0	610	24.0	610	0.081
3L245	24.5	622	24.5	622	0.083
3L250	25.0	635	25.0	635	0.085
3L255	25.5	648	25.5	648	0.087
3L260	26.0	660	26.0	660	0.088
3L265	26.5	673	26.5	673	0.09
3L270	27.0	686	27.0	686	0.092
3L275	27.5	699	27.5	699	0.093
3L280	28.0	711	28.0	711	0.095
3L285	28.5	724	28.5	724	0.097
3L290	29.0	737	29.0	737	0.098
3L293	29.5	749	29.5	749	0.099
3L300	30.0	762	30.0	762	0.102
3L310	31.0	787	31.0	787	0.105
3L320	32.0	813	32.0	813	0.109
3L330	33.0	838	33.0	838	0.112
3L340	34.0	864	34.0	864	0.115
3L345	34.5	876	34.5	876	0.117
3L350	35.0	889	35.0	889	0.119
3L360	36.0	914	36.0	914	0.122
3L370	37.0	940	37.0	940	0.126
3L380	38.0	965	38.0	965	0.129
3L390	39.0	991	39.0	991	0.132
3L400	40.0	1016	40.0	1016	0.136
3L410	41.0	1041	41.0	1041	0.139
3L415	41.5	1054	41.5	1054	0.141
3L420	42.0	1067	42.0	1067	0.143
3L430	43.0	1092	43.0	1092	0.146
3L440	44.0	1118	44.0	1118	0.149
3L450	45.0	1143	45.0	1143	0.153
3L460	46.0	1168	46.0	1168	0.156
3L470	47.0	1194	47.0	1194	0.16
3L480	48.0	1219	48.0	1219	0.163
3L490	49.0	1245	49.0	1245	0.166
3L500	50.0	1270	50.0	1270	0.17

3L					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
3L510	51.0	1295	51.0	1295	0.173
3L520	52.0	1321	52.0	1321	0.177
3L530	53.0	1346	53.0	1346	0.18
3L540	54.0	1372	54.0	1372	0.183
3L550	55.0	1397	55.0	1397	0.187
3L560	56.0	1422	56.0	1422	0.19
3L570	57.0	1448	57.0	1448	0.194
3L580	58.0	1473	58.0	1473	0.197
3L590	59.0	1499	59.0	1499	0.2
3L600	60.0	1524	60.0	1524	0.204
3L610	61.0	1549	61.0	1549	0.207
3L620	62.0	1575	62.0	1575	0.211
3L630	63.0	1600	63.0	1600	0.214
3L640	64.0	1626	64.0	1626	0.217
3L650	65.0	1651	65.0	1651	0.221
3L660	66.0	1676	66.0	1676	0.224
3L670	67.0	1702	67.0	1702	0.228
3L675	67.5	1715	67.5	1715	0.229
3L680	68.0	1727	68.0	1727	0.231
3L690	69.0	1753	69.0	1753	0.234
3L700	70.0	1778	70.0	1778	0.238
3L710	71.0	1803	71.0	1803	0.241
3L730	73.0	1854	73.0	1854	0.248
3L740	74.0	1880	74.0	1880	0.251

BELT PART NUMBER NOMENCLATURE



Belt No: **4L200**
4L - Profile
200 - Outside Circumference
(Inches In tenths: 20.0")

NOTE: Goodyear Classic A (4L) and B (5L) profiles are dual-branded, incorporating both the traditional Classic part number and an FHP (Fractional Horsepower) part number into a single belt line. This dual branding is intended to create a versatile belt that can be used in both classical and fractional horsepower applications.

4L/A						
Belt No	Alternate Part No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
4L180	A16	17.68	449	17.78	452	0.08
4L190	A17	18.78	477	18.89	480	0.09
4L188	N/A	19.0	483	19.0	483	0.116
4L200	A18	19.88	505	20	508	0.1
4L210	A19	20.98	533	21.11	536	0.11
4L215	N/A	21.5	546	21.5	546	0.13
4L220	A20	21.97	558	22.09	561	0.13
4L230	A21	22.95	583	23.08	586	0.13

FRACTIONAL HORSEPOWER (FHP) V-BELTS



4L/A continued


Belt No	Alternate Part No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
4L235	N/A	23.5	597	23.5	597	0.15
4L240	A22	23.98	609	24.10	612	0.13
4L250	A23	24.96	634	25.08	637	0.13
4L255	N/A	25.5	648	25.5	648	0.16
4L260	A24	25.98	660	26.11	663	0.15
4L270	A25	26.97	685	27.09	688	0.15
4L275	N/A	27.5	699	27.5	699	0.17
4L280	A26	27.95	710	28.08	713	0.15
4L285	N/A	28.5	724	28.5	724	0.18
4L290	A27	28.98	736	29.10	739	0.18
4L295	N/A	29.5	749	29.5	749	0.19
4L300	A28	29.96	761	30.08	764	0.18
4L310	A29	30.98	787	31.11	790	0.18
4L318	N/A	32.0	813	32.0	813	0.20
4L320	A30	31.97	812	32.09	815	0.18
4L328	N/A	33.0	838	33.0	838	0.20
4L330	A31	32.95	837	33.08	840	0.2
4L333	N/A	33.5	851	33.5	851	0.21
4L338	N/A	34.0	864	34.0	864	0.21
4L340	A32	33.98	863	34.10	866	0.2
4L346	N/A	34.5	876	34.5	876	0.21
4L350	A33	34.96	888	35.08	891	0.2
4L360	A34	35.98	914	36.11	917	0.22
4L370	A35	36.97	939	37.09	942	0.22
4L380	A36	37.95	964	38.08	967	0.22
4L390	A37	38.98	990	39.10	993	0.22
4L400	A38	39.96	1015	40.08	1018	0.24
4L405	N/A	40.5	1029	40.5	1029	0.25
4L410	A39	40.98	1041	41.11	1044	0.24
4L420	A40	41.97	1066	42.09	1069	0.24
4L430	A41	42.95	1091	43.08	1094	0.24
4L440	A42	43.98	1117	44.10	1120	0.26
4L450	A43	44.96	1142	45.08	1145	0.26
4L460	A44	45.98	1168	46.11	1171	0.26
4L470	A45	46.97	1193	47.09	1196	0.29
4L475	N/A	47.5	1207	47.5	1207	0.30
4L480	A46	47.95	1218	48.08	1221	0.29
4L490	A47	48.98	1244	49.10	1247	0.29
4L500	A48	49.96	1269	50.08	1272	0.29
4L510	A49	50.98	1295	51.11	1298	0.31
4L520	A50	51.97	1320	52.09	1323	0.31
4L530	A51	52.95	1345	53.08	1348	0.31
4L540	A52	53.98	1371	54.10	1374	0.33
4L550	A53	54.96	1396	55.08	1399	0.33
4L560	A54	55.98	1422	56.11	1425	0.33
4L570	A55	56.97	1447	57.09	1450	0.33
4L580	A56	57.95	1472	58.08	1475	0.35

4L/A continued

Belt No	Alternate Part No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
4L590	A57	58.98	1498	59.10	1501	0.35
4L600	A58	59.96	1523	60.08	1526	0.35
4L610	A59	60.98	1549	61.11	1552	0.35
4L620	A60	61.97	1574	62.09	1577	0.37
4L630	A61	62.95	1599	63.08	1602	0.37
4L640	A62	63.98	1625	64.10	1628	0.37
4L650	A63	64.96	1650	65.08	1653	0.4
4L660	A64	65.98	1676	66.11	1679	0.4
4L670	A65	66.97	1701	67.09	1704	0.4
4L680	A66	67.95	1726	68.08	1729	0.4
4L690	A67	68.98	1752	69.10	1755	0.42
4L700	A68	69.96	1777	70.08	1780	0.42
4L710	A69	70.98	1803	71.11	1806	0.42
4L720	A70	71.97	1828	72.09	1831	0.44
4L730	A71	72.95	1853	73.08	1856	0.44
4L740	A72	73.98	1879	74.10	1882	0.44
4L750	A73	74.96	1904	75.08	1907	0.44
4L760	A74	75.98	1930	76.11	1933	0.46
4L770	A75	76.97	1955	77.09	1958	0.46
4L780	A76	77.95	1980	78.08	1983	0.46
4L790	A77	78.98	2006	79.10	2009	0.49
4L800	A78	79.96	2031	80.08	2034	0.49
4L810	A79	80.98	2057	81.11	2060	0.49
4L820	A80	81.97	2082	82.09	2085	0.49
4L830	A81	82.95	2107	83.08	2110	0.51
4L840	A82	83.98	2133	84.10	2136	0.51
4L850	A83	84.96	2158	85.08	2161	0.51
4L860	A84	85.98	2184	86.11	2187	0.51
4L870	A85	86.97	2209	87.09	2212	0.53
4L880	A86	87.95	2234	88.08	2237	0.53
4L890	A87	88.98	2260	89.10	2263	0.53
4L900	A88	89.96	2285	90.08	2288	0.55
4L910	A89	90.98	2311	91.11	2314	0.55
4L920	A90	91.97	2336	92.09	2339	0.55
4L930	A91	92.95	2361	93.08	2364	0.55
4L940	A92	93.98	2387	94.10	2390	0.57
4L950	A93	94.96	2412	95.08	2415	0.57
4L960	A94	95.98	2438	96.11	2441	0.57
4L970	A95	96.97	2463	97.09	2466	0.6
4L980	A96	97.95	2488	98.08	2491	0.6
4L990	A97	98.98	2514	99.10	2517	0.6
4L1000	A98	99.96	2539	100.08	2542	0.6

*Additional Length May Be Available.
Contact us for more information.

FRACTIONAL HORSEPOWER (FHP) V-BELTS



BELT PART NUMBER NOMENCLATURE

Belt No: **5L300**
5L - Profile
300 - Outside Circumference
(Inches in tenths: 30.0")

NOTE: Goodyear Classic A (4L) and B (5L) profiles are dual-branded, incorporating both the traditional Classic part number and an FHP (Fractional Horsepower) part number into a single belt line. This dual branding is intended to create a versatile belt that can be used in both classical and fractional horsepower applications.

5L/B						
Belt No	Alternate Part No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5L230	B20	22.74	578	22.87	581	0.23
5L240	B21	23.73	603	23.85	606	0.24
5L250	B22	24.72	628	24.87	632	0.25
5L260	B23	25.71	653	25.86	657	0.24
5L265	N/A	26.5	673	26.5	673	0.24
5L270	B24	26.73	679	26.88	683	0.24
5L280	B25	27.72	704	27.87	708	0.26
5L290	B26	28.70	729	28.85	733	0.26
5L300	B27	29.72	755	29.87	759	0.29
5L310	B28	30.71	780	30.86	784	0.29
5L320	B29	31.73	806	31.88	810	0.31
5L330	B30	32.72	831	32.87	835	0.31
5L340	B31	33.70	856	33.85	860	0.33
5L350	B32	34.72	882	34.87	886	0.33
5L355	N/A	35.5	902	35.5	902	0.32
5L360	B33	35.71	907	35.86	911	0.35
5L370	B34	36.73	933	36.88	937	0.35
5L380	B35	37.72	958	37.87	962	0.37
5L390	B36	38.70	983	38.85	987	0.37
5L400	B37	39.72	1009	39.87	1013	0.4
5L410	B38	40.71	1034	40.86	1038	0.4
5L420	B39	41.73	1060	41.88	1064	0.4
5L430	B40	42.72	1085	42.87	1089	0.42
5L440	B41	43.70	1110	43.85	1114	0.42
5L450	B42	44.72	1136	44.87	1140	0.44
5L460	B43	45.71	1161	45.86	1165	0.44
5L470	B44	46.73	1187	46.88	1191	0.46
5L480	B45	47.72	1212	47.87	1216	0.46
5L490	B46	48.70	1237	48.85	1241	0.49
5L500	B47	49.72	1263	49.87	1267	0.49
5L510	B48	50.71	1288	50.86	1292	0.51
5L520	B49	51.73	1314	51.88	1318	0.51
5L530	B50	52.72	1339	52.87	1343	0.53
5L540	B51	53.70	1364	53.85	1368	0.53
5L550	B52	54.72	1390	54.87	1394	0.55
5L560	B53	55.71	1415	55.86	1419	0.55

5L/B						
Belt No	Alternate Part No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5L570	B54	56.73	1441	56.88	1445	0.57
5L580	B55	57.72	1466	57.87	1470	0.57
5L590	B56	58.70	1491	58.85	1495	0.6
5L600	B57	59.72	1517	59.87	1521	0.6
5L610	B58	60.71	1542	60.86	1546	0.6
5L620	B59	61.73	1568	61.88	1572	0.62
5L630	B60	62.72	1593	62.87	1597	0.62
5L640	B61	63.70	1618	63.85	1622	0.64
5L650	B62	64.72	1644	64.87	1648	0.64
5L660	B63	65.71	1669	65.86	1673	0.66
5L670	B64	66.73	1695	66.88	1699	0.66
5L680	B65	67.72	1720	67.87	1724	0.68
5L690	B66	68.70	1745	68.85	1749	0.68
5L700	B67	69.72	1771	69.87	1775	0.71
5L710	B68	70.71	1796	70.86	1800	0.71
5L720	B69	71.73	1822	71.88	1826	0.73
5L730	B70	72.72	1847	72.87	1851	0.73
5L740	B71	73.70	1872	73.85	1876	0.75
5L750	B72	74.72	1898	74.87	1902	0.75
5L760	B73	75.71	1923	75.86	1927	0.77
5L770	B74	76.73	1949	76.88	1953	0.77
5L780	B75	77.72	1974	77.87	1978	0.79
5L790	B76	78.70	1999	78.85	2003	0.79
5L800	B77	79.72	2025	79.87	2029	0.79
5L810	B78	80.71	2050	80.86	2054	0.82
5L820	B79	81.73	2076	81.88	2080	0.82
5L830	B80	82.72	2101	82.87	2105	0.84
5L840	B81	83.70	2126	83.85	2130	0.84
5L850	B82	84.72	2152	84.87	2156	0.86
5L860	B83	85.71	2177	85.86	2181	0.86
5L870	B84	86.73	2203	86.88	2207	0.88
5L880	B85	87.72	2228	87.87	2232	0.88
5L890	B86	88.70	2253	88.85	2257	0.9
5L900	B87	89.72	2279	89.87	2283	0.9
5L910	B88	90.71	2304	90.86	2308	0.93
5L920	B89	91.73	2330	91.88	2334	0.93
5L930	B90	92.72	2355	92.87	2359	0.95
5L940	B91	93.70	2380	93.85	2384	0.95
5L950	B92	94.72	2406	94.87	2410	0.97
5L960	B93	95.71	2431	95.86	2435	0.97
5L970	B94	96.73	2457	96.88	2461	0.99
5L980	B95	97.72	2482	97.87	2486	0.99
5L990	B96	98.70	2507	98.85	2511	0.99
5L1000	B97	99.72	2533	99.87	2537	1.01


*Additional Length May Be Available.
Contact us for more information.

CLASSIC COGGED V-BELTS



Goodyear Classic Cogged V-Belts are available in AX, BX, or CX profiles offers premium performance and long service life. Cogged belts provide efficient power transmission by reducing slippage and improving grip on the pulleys. The raw edge helps dissipate heat, and the cogged design further aids in reducing heat buildup during operation. The raw edge and cogged design collectively contribute to improved flexibility, making the belt more adaptable to small pulley diameters.

BELT CONSTRUCTION AX/BX/CX

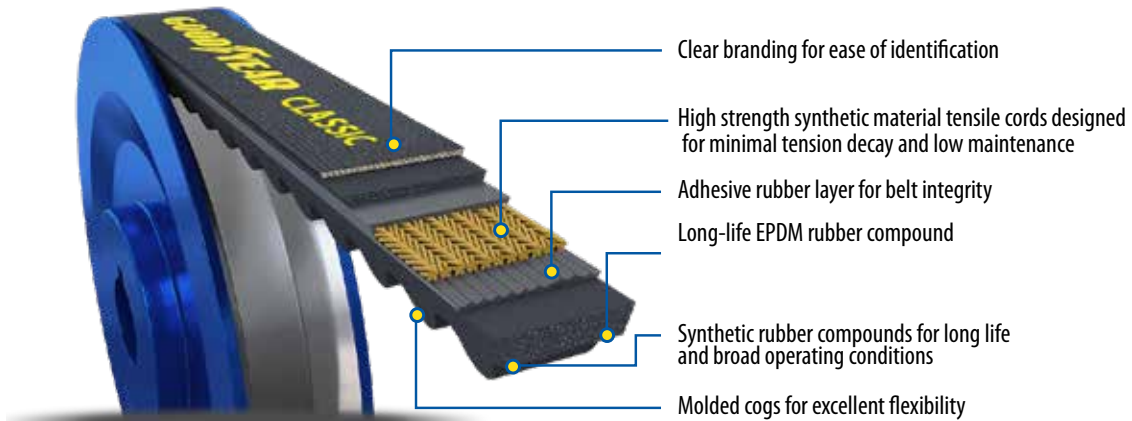

FEATURES & BENEFITS

- Radial cog design increases efficiency and reduces cracking.
- Long-life EPDM Rubber Compound for quiet operation.
- Precision ground sides for maximum pulley contact .
- Meets static conductivity requirements.
- Meets or Exceeds OEM Specifications.


• **TEMPERATURE RANGE:**
-31°F to 248°F / -31°C to 120°C

BELT PART NUMBER NOMENCLATURE

Belt No: **AX100**
A - Profile
X - Molded Cogged
100 - Inside Circumference (In)


PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
AX	22.3	175.0	566.0	4444.0
BX	26.7	197.7	679.0	5022.0
CX	54.5	255.9	1383.0	6500.0

*Additional Length May Be Available.
Contact us for more information.

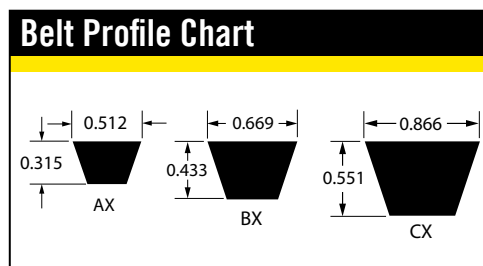

Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
Copyright 2023 The Goodyear Tire & Rubber Company

CLASSIC COGGED V-BELTS



BELT PART NUMBER NOMENCLATURE

Belt No: **AX100**
A - Profile
X - Molded Cogged
100 - Inside Circumference (In)


AX					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
AX19	20.98	533	21.35	542	0.10
AX20	21.98	558	22.35	567	0.11
AX21	22.98	584	23.35	593	0.11
AX22	23.98	609	24.35	619	0.11
AX23	24.96	634	25.33	643	0.11
AX24	25.98	660	26.35	669	0.11
AX25	26.97	685	27.34	694	0.11
AX26	27.95	710	28.32	719	0.11
AX27	28.98	736	29.35	746	0.13
AX28	29.96	761	30.33	770	0.13
AX29	30.98	787	31.35	796	0.13
AX30	31.97	812	32.34	821	0.13
AX31	32.95	837	33.32	846	0.13
AX32	33.98	863	34.35	873	0.15
AX33	34.96	888	35.33	897	0.15
AX34	35.98	914	36.35	923	0.15
AX35	36.97	939	37.34	948	0.15
AX36	37.95	964	38.32	973	0.18
AX37	38.98	990	39.35	1000	0.18
AX38	39.96	1015	40.33	1024	0.18
AX39	40.98	1041	41.35	1050	0.18
AX40	41.97	1066	42.34	1075	0.18
AX41	42.95	1091	43.32	1100	0.2
AX42	43.98	1117	44.35	1127	0.2
AX43	44.96	1142	45.33	1151	0.2
AX44	45.98	1168	46.35	1177	0.2
AX45	46.97	1193	47.34	1202	0.2
AX46	47.95	1218	48.32	1227	0.22
AX47	48.98	1244	49.35	1254	0.22
AX48	49.96	1269	50.33	1278	0.22
AX49	50.98	1295	51.35	1304	0.22
AX50	51.97	1320	52.34	1329	0.22
AX51	52.95	1345	53.32	1354	0.24
AX52	53.98	1371	54.35	1381	0.24
AX53	54.96	1396	55.33	1405	0.24
AX54	55.98	1422	56.35	1431	0.24
AX55	56.97	1447	57.34	1456	0.26
AX56	57.95	1472	58.32	1481	0.26
AX57	58.98	1498	59.35	1508	0.26
AX58	59.96	1523	60.33	1532	0.26
AX59	60.98	1549	61.35	1558	0.26

AX					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
AX60	61.97	1574	62.34	1583	0.29
AX61	62.95	1599	63.32	1608	0.29
AX62	63.98	1625	64.35	1635	0.29
AX63	64.96	1650	65.33	1659	0.29
AX64	65.98	1676	66.35	1685	0.29
AX65	66.97	1701	67.34	1710	0.31
AX66	67.95	1726	68.32	1735	0.31
AX67	68.98	1752	69.35	1762	0.31
AX68	69.96	1777	70.33	1786	0.31
AX69	70.98	1803	71.35	1812	0.31
AX70	71.97	1828	72.34	1837	0.33
AX71	72.95	1853	73.32	1862	0.33
AX72	73.98	1879	74.35	1889	0.33
AX73	74.96	1904	75.33	1913	0.33
AX74	75.98	1930	76.35	1939	0.33
AX75	76.97	1955	77.34	1964	0.35
AX76	77.95	1980	78.32	1989	0.35
AX77	78.98	2006	79.35	2016	0.35
AX78	79.96	2031	80.33	2040	0.35
AX79	80.98	2057	81.35	2066	0.37
AX80	81.97	2082	82.34	2091	0.37
AX81	82.95	2107	83.32	2116	0.37
AX82	83.98	2133	84.35	2143	0.37
AX83	84.96	2158	85.33	2167	0.37
AX84	85.98	2184	86.35	2193	0.4
AX85	86.97	2209	87.34	2218	0.4
AX86	87.95	2234	88.32	2243	0.4
AX87	88.98	2260	89.35	2270	0.4
AX88	89.96	2285	90.33	2294	0.4
AX89	90.98	2311	91.35	2320	0.42
AX90	91.97	2336	92.34	2345	0.42
AX91	92.95	2361	93.32	2370	0.42
AX92	93.98	2387	94.35	2397	0.42
AX93	94.96	2412	95.33	2421	0.42
AX94	95.98	2438	96.35	2447	0.44
AX95	96.97	2463	97.34	2472	0.44
AX96	97.95	2488	98.32	2497	0.44
AX97	98.98	2514	99.35	2524	0.44
AX98	99.96	2539	100.33	2548	0.44
AX100	101.97	2590	102.34	2599	0.46
AX103	104.96	2666	105.33	2675	0.49
AX105	106.97	2717	107.34	2726	0.49
AX110	111.97	2844	112.34	2853	0.51
AX112	113.98	2895	114.35	2905	0.51
AX120	121.97	3098	122.34	3107	0.55
AX128	129.96	3301	130.33	3310	0.6
AX144	145.98	3708	146.35	3717	0.66
AX173	174.96	4444	175.33	4453	0.79

CLASSIC COGGED V-BELTS



BELT PART NUMBER NOMENCLATURE



Belt No: **BX100**
B - Profile
X - Molded Cogged
100 - Inside Circumference (In)

BX

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
BX24	26.73	679	27.15	690	0.22
BX25	27.72	704	28.14	715	0.22
BX26	28.70	729	29.29	744	0.24
BX27	29.72	755	30.31	770	0.24
BX28	30.71	780	31.30	795	0.26
BX29	31.73	806	32.32	821	0.26
BX30	32.72	831	33.31	846	0.26
BX31	33.70	856	34.29	871	0.29
BX32	34.72	882	35.31	897	0.29
BX33	35.71	907	36.30	922	0.31
BX34	36.73	933	37.32	948	0.31
BX35	37.72	958	38.31	973	0.31
BX36	38.70	983	39.29	998	0.33
BX37	39.72	1009	40.31	1024	0.33
BX38	40.71	1034	41.30	1049	0.35
BX39	41.73	1060	42.32	1075	0.35
BX40	42.72	1085	43.31	1100	0.35
BX41	43.70	1110	44.29	1125	0.37
BX42	44.72	1136	45.31	1151	0.37
BX43	45.71	1161	46.30	1176	0.4
BX44	46.73	1187	47.32	1202	0.4
BX45	47.72	1212	48.31	1227	0.42
BX46	48.70	1237	49.29	1252	0.42
BX47	49.72	1263	50.31	1278	0.42
BX48	50.71	1288	51.30	1303	0.44
BX49	51.73	1314	52.32	1329	0.44
BX50	52.72	1339	53.31	1354	0.46
BX51	53.70	1364	54.29	1379	0.46
BX52	54.72	1390	55.31	1405	0.46
BX53	55.71	1415	56.30	1430	0.49
BX54	56.73	1441	57.32	1456	0.49
BX55	57.72	1466	58.31	1481	0.51
BX56	58.70	1491	59.29	1506	0.51
BX57	59.72	1517	60.31	1532	0.51
BX58	60.71	1542	61.30	1557	0.53
BX59	61.73	1568	62.32	1583	0.53
BX60	62.72	1593	63.31	1608	0.55
BX61	63.70	1618	64.29	1633	0.55
BX62	64.72	1644	65.31	1659	0.55
BX63	65.71	1669	66.30	1684	0.57

BX

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
BX64	66.73	1695	67.32	1710	0.57
BX65	67.72	1720	68.31	1735	0.6
BX66	68.70	1745	69.29	1760	0.6
BX67	69.72	1771	70.31	1786	0.62
BX68	70.71	1796	71.30	1811	0.62
BX69	71.73	1822	72.32	1837	0.62
BX70	72.72	1847	73.31	1862	0.64
BX71	73.70	1872	74.29	1887	0.64
BX72	74.72	1898	75.31	1913	0.66
BX73	75.71	1923	76.30	1938	0.66
BX74	76.73	1949	77.32	1964	0.66
BX75	77.72	1974	78.31	1989	0.68
BX76	78.70	1999	79.29	2014	0.68
BX77	79.72	2025	80.31	2040	0.71
BX78	80.71	2050	81.30	2065	0.71
BX79	81.73	2076	82.32	2091	0.71
BX80	82.72	2101	83.31	2116	0.73
BX81	83.70	2126	84.29	2141	0.73
BX82	84.72	2152	85.31	2167	0.75
BX83	85.71	2177	86.30	2192	0.75
BX84	86.73	2203	87.32	2218	0.77
BX85	87.72	2228	88.31	2243	0.77
BX86	88.70	2253	89.29	2268	0.77
BX87	89.72	2279	90.31	2294	0.79
BX88	90.71	2304	91.30	2319	0.79
BX89	91.73	2330	92.32	2345	0.82
BX90	92.72	2355	93.31	2370	0.82
BX91	93.70	2380	94.29	2395	0.82
BX92	94.72	2406	95.31	2421	0.84
BX93	95.71	2431	96.30	2446	0.84
BX94	96.73	2457	97.32	2472	0.86
BX95	97.72	2482	98.31	2497	0.86
BX96	98.70	2507	99.29	2522	0.86
BX97	99.72	2533	100.31	2548	0.88
BX98	100.71	2558	101.30	2573	0.88
BX99	101.73	2584	102.32	2599	0.9
BX100	102.72	2609	103.31	2624	0.9
BX103	105.71	2685	106.30	2700	0.93
BX105	107.72	2736	108.31	2751	0.95
BX106	108.70	2761	109.29	2776	0.97
BX108	110.71	2812	111.30	2827	0.97
BX110	112.72	2863	113.31	2878	0.99
BX103	105.71	2685	106.30	2700	0.93
BX105	107.72	2736	108.31	2751	0.95
BX106	108.70	2761	109.29	2776	0.97
BX108	110.71	2812	111.30	2827	0.97
BX110	112.72	2863	113.31	2878	0.99

BX continued

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
BX112	114.72	2914	115.31	2929	1.01
BX113	115.71	2939	116.30	2954	1.01
BX115	117.72	2990	118.31	3005	1.04
BX116	118.70	3015	119.29	3030	1.06
BX120	122.72	3117	123.31	3132	1.08
BX123	125.71	3193	126.30	3208	1.12
BX124	126.73	3219	127.32	3234	1.12
BX128	130.71	3320	131.30	3335	1.17
BX133	135.71	3447	136.30	3462	1.21
BX136	138.70	3523	139.29	3538	1.23
BX140	142.72	3625	143.31	3640	1.28
BX144	146.73	3727	147.32	3742	1.3
BX148	150.71	3828	151.30	3843	1.35
BX150	152.72	3879	153.31	3894	1.37
BX158	160.71	4082	161.30	4097	1.43
BX162	164.72	4184	165.31	4199	1.48
BX173	175.71	4463	176.30	4478	1.57
BX180	182.72	4641	183.31	4656	1.63
BX195	197.72	5022	198.31	5037	1.76
BX205	207.72	5276	208.14	5287	1.84
BX210	212.72	5403	213.14	5414	1.88
BX225	227.72	5784	228.14	5795	2.02
BX255	257.72	6546	258.14	6557	2.29
BX270	272.72	6927	273.14	6938	2.42
BX300	300.3	7628	301.9	7668	2.71


CX

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
CX96	99.45	2526	99.87	2537	1.61
CX100	103.46	2628	103.88	2639	1.68
CX101	104.45	2653	104.87	2664	1.7
CX105	108.46	2755	108.88	2766	1.76
CX106	109.45	2780	109.87	2791	1.79
CX109	112.48	2857	112.90	2868	1.83
CX112	115.47	2933	115.89	2944	1.87
CX115	118.46	3009	118.88	3020	1.94
CX255	258.46	6565	258.88	6576	3.95
CX270	273.46	6946	273.88	6957	4.18
CX300	303.46	7708	303.88	7719	5.6
CX330	333.46	8470	333.88	8100	6.1
CX360	363.46	9232	363.88	9243	6.7

*Additional Length May Be Available.
Contact us for more information.

BELT PART NUMBER NOMENCLATURE

Belt No: **CX100**
C - Profile
X - Molded Cogged
100 - Inside Circumference (In)



CX

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
CX51	54.45	1383	54.87	1394	0.86
CX60	63.46	1612	63.88	1623	1.01
CX64	66.63	1693	67.07	1704	0
CX68	71.46	1815	71.88	1826	1.15
CX75	78.46	1993	78.88	2004	1.26
CX78	81.46	2069	81.88	2080	1.3
CX81	84.45	2145	84.87	2156	1.37
CX83	86.46	2196	86.88	2207	1.39
CX85	88.46	2247	88.88	2258	1.43
CX90	93.46	2374	93.88	2385	1.5




NARROW CLASSIC WRAPPED 3V, 5V & 8V V-BELTS



A "Narrow Wrapped V-Belt" refers to a type of V-belt that has a narrower width compared to standard V-belts, making them suitable for applications with limited space or smaller pulley diameters. The wrapped construction involves a layer of fabric on the outer surface of the belt. This layer provides protection against environmental factors, wear, and enhances durability.

BELT CONSTRUCTION 3V/5V/8V

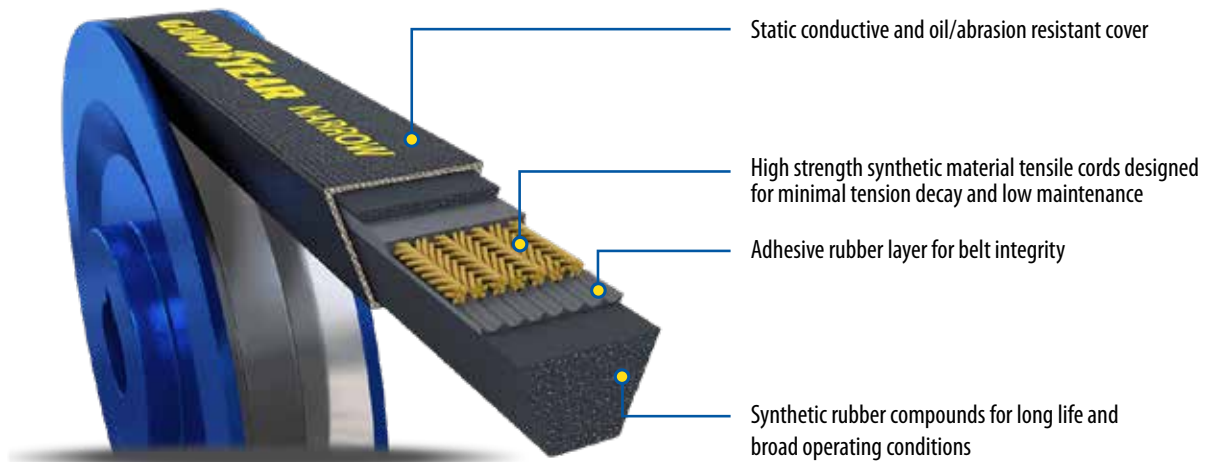

FEATURES & BENEFITS


- The narrow profile makes these belts suitable for applications where space is limited or where smaller pulleys are used.
- Narrow wrapped V-belts are generally designed for applications with light to moderate power transmission requirements.
- Meets oil and heat resistant standards.
- Meets static conductivity requirements.
- **TEMPERATURE RANGE:**
-22°F to 176°F / -30°C to 80°C).

BELT PART NUMBER NOMENCLATURE

Belt No: **3V250**
3V - Profile
250 - Outside Circumference (Inches in tenths: 25.0")


PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
3V	25.0	140.0	635.0	3556.0
5V	50.0	355.0	1270.0	9017.0
8V	106.0	600.0	2692.4	15240.0

*Additional Length May Be Available.
 Contact us for more information.

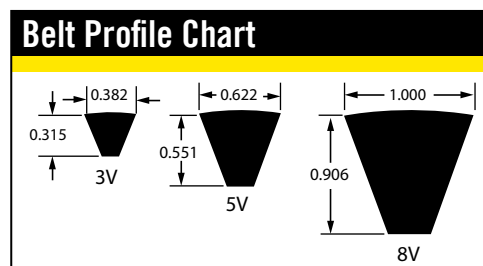


Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
 Copyright 2023 The Goodyear Tire & Rubber Company

NARROW CLASSIC WRAPPED 3V, 5V & 8V V-BELTS



BELT PART NUMBER NOMENCLATURE

Belt No: **3V300**
3V - Profile
300 - Outside Circumference
(Inches in tenths: 30.0")




BELT PART NUMBER NOMENCLATURE

Belt No: **5V500**
5V - Profile
500 - Outside Circumference
(Inches in tenths: 50.0")

3V					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3V250	25.00	635	25.37	644	0.11
3V265	26.50	673	26.87	683	0.11
3V280	28.00	711	28.37	721	0.13
3V300	30.00	762	30.37	771	0.13
3V315	31.50	800	31.87	810	0.13
3V335	33.50	851	33.87	860	0.15
3V355	35.50	902	35.87	911	0.15
3V375	37.50	953	37.87	962	0.18
3V400	40.00	1016	40.37	1025	0.18
3V420	42.00	1067	42.37	1076	0.18
3V425	42.50	1080	42.87	1089	0.2
3V450	45.00	1143	45.37	1152	0.2
3V475	47.50	1207	47.87	1216	0.22
3V500	50.00	1270	50.37	1279	0.22
3V530	53.00	1346	53.37	1356	0.24
3V560	56.00	1422	56.37	1432	0.24
3V590	59.00	1499	59.37	1508	0.26
3V600	60.00	1524	60.37	1533	0.26
3V630	63.00	1600	63.37	1610	0.29
3V650	65.00	1651	65.37	1660	0.29
3V670	67.00	1702	67.37	1711	0.29
3V710	71.00	1803	71.37	1813	0.31
3V730	73.00	1854	73.37	1864	0.33
3V750	75.00	1905	75.37	1914	0.33
3V800	80.00	2032	80.37	2041	0.35
3V810	81.00	2057	81.37	2067	0.35
3V830	83.00	2108	83.37	2118	0.37
3V850	85.00	2159	85.37	2168	0.37
3V900	90.00	2286	90.37	2295	0.4
3V950	95.00	2413	95.37	2422	0.42
3V1000	100.00	2540	100.37	2549	0.44
3V1060	106.00	2692	106.37	2702	0.46
3V1120	112.00	2845	112.37	2854	0.49
3V1180	118.00	2997	118.37	3007	0.53
3V1250	125.00	3175	125.37	3184	0.55
3V1320	132.00	3353	132.37	3362	0.57
3V1400	140.00	3556	140.37	3565	0.62

5V					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5V500	50.00	1270	50.74	1289	0.6
5V530	53.00	1346	53.74	1365	0.64
5V560	56.00	1422	56.74	1441	0.66
5V600	60.00	1524	60.74	1543	0.71
5V630	63.00	1600	63.74	1619	0.75
5V670	67.00	1702	67.74	1721	0.79
5V710	71.00	1803	71.74	1822	0.84
5V750	75.00	1905	75.74	1924	0.9
5V800	80.00	2032	80.74	2051	0.95
5V850	85.00	2159	85.74	2178	1.01
5V900	90.00	2286	90.74	2305	1.08
5V950	95.00	2413	95.74	2432	1.12
5V1000	100.00	2540	100.74	2559	1.19
5V1060	106.00	2692	106.74	2711	1.26
5V1120	112.00	2845	112.74	2864	1.32
5V1180	118.00	2997	118.74	3016	1.41
5V1250	125.00	3175	125.74	3194	1.5
5V1320	132.00	3353	132.74	3372	1.57
5V1400	140.00	3556	140.74	3575	1.68
5V1500	150.00	3810	150.74	3829	1.79
5V1600	160.00	4064	160.74	4083	1.9
5V1630	163.00	4140	163.74	4159	1.94
5V1700	170.00	4318	170.74	4337	2.03
5V1710	171.00	4343	171.74	4362	2.03
5V1800	180.00	4572	180.74	4591	2.14
5V1900	190.00	4826	190.74	4845	2.27
5V2000	200.00	5080	200.74	5099	2.38
5V2120	212.00	5385	212.74	5404	2.51
5V2240	224.00	5690	224.74	5708	2.67
5V2360	236.00	5994	236.74	6013	2.8
5V2500	250.00	6350	250.74	6369	2.98
5V2650	265.00	6731	265.74	6750	3.15
5V2800	280.00	7112	280.74	7131	3.33
5V3000	300.00	7620	300.74	7639	3.57
5V3150	315.00	8001	315.74	8020	3.75
5V3350	335.00	8509	335.74	8528	3.99
5V3550	355.00	9017	355.74	9036	4.23

NARROW CLASSIC WRAPPED 3V, 5V & 8V V-BELTS



BELT PART NUMBER NOMENCLATURE

Belt No: **8V1060**
8V - Profile
1060 - Outside Circumference
 (Inches in tenths: 106.00")

8V

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
8V1060	106.00	2692	106.74	2711	3.26
8V1120	112.00	2845	112.74	2864	3.44
8V1180	118.00	2997	118.74	3016	3.62
8V1250	125.00	3175	125.74	3194	3.84
8V1320	132.00	3353	132.74	3372	4.06
8V1400	140.00	3556	140.74	3575	4.3
8V1500	150.00	3810	150.74	3829	4.61
8V1600	160.00	4064	160.74	4083	4.92
8V1700	170.00	4318	170.74	4337	5.23
8V1800	180.00	4572	180.74	4591	5.53
8V1900	190.00	4826	190.74	4845	5.84
8V2000	200.00	5080	200.74	5099	6.15
8V2120	212.00	5385	212.74	5404	6.5
8V2240	224.00	5690	224.74	5708	6.88
8V2300	230.00	5842	230.74	5861	7.08
8V2360	236.00	5994	236.74	6013	7.25
8V2500	250.00	6350	250.74	6369	7.67
8V2650	265.00	6731	265.74	6750	8.14
8V2800	280.00	7112	280.74	7131	8.6
8V3000	300.00	7620	300.74	7639	9.22
8V3150	315.00	8001	315.74	8020	9.68
8V3350	335.00	8509	335.74	8528	10.3
8V3550	355.00	9017	355.74	9036	10.91
8V3750	375.00	9525	375.74	9544	11.53
8V4000	400.00	10160	400.74	10179	12.28
8V4250	425.00	10795	425.74	10814	13.05
8V4500	450.00	11430	450.74	11449	13.83
8V4750	475.00	12065	475.74	12084	14.6
8V5000	500.00	12700	500.74	12719	15.37
8V5600	560.00	14224	560.74	14243	17.2
8V6000	600.00	15240	600.74	15259	18.43

*Additional Length May Be Available.
 Contact us for more information.




NARROW CLASSIC COGGED 3VX, 5VX & 8VX V-BELTS



Narrow Classic Cogged V-Belts with a raw edge design are specifically engineered to provide improved flexibility and heat dissipation, making them suitable for demanding applications where efficiency and durability are critical. The narrower design makes them suitable for applications where space is limited or where a more compact belt drive system is needed. The cogged design makes these belts well-suited for applications with small pulley diameters. The flexibility and reduced bending resistance enable them to navigate around tight pulleys more effectively.

BELT CONSTRUCTION 3VX/5VX/8VX

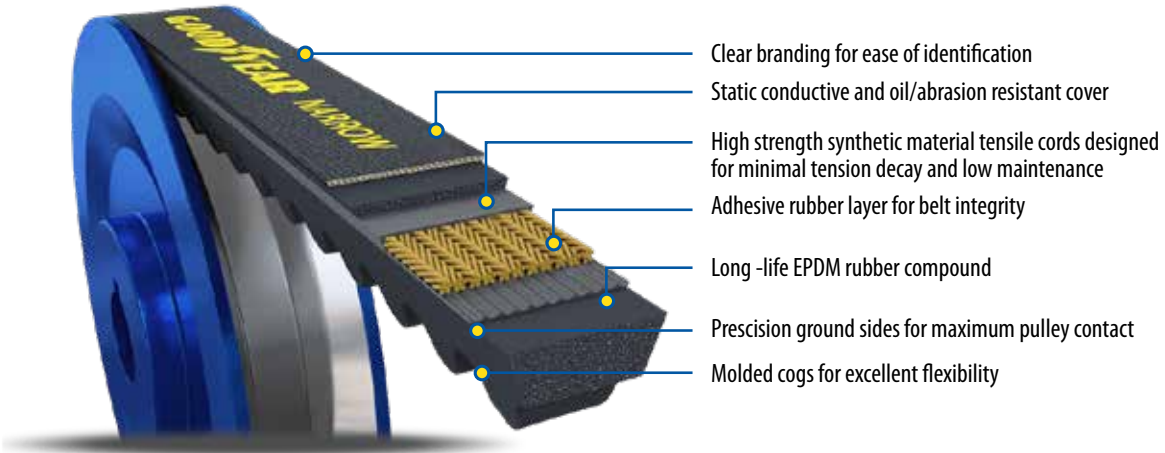

- Clear branding for ease of identification
- Static conductive and oil/abrasion resistant cover
- High strength synthetic material tensile cords designed for minimal tension decay and low maintenance
- Adhesive rubber layer for belt integrity
- Long-life EPDM rubber compound
- Precision ground sides for maximum pulley contact
- Molded cogs for excellent flexibility

FEATURES & BENEFITS

- The cogged profile reduces friction and heat generation, leading to higher efficiency in power transmission.
- The cogs on the inner surface improve grip on the pulleys, reducing the risk of slippage. This is particularly beneficial in high-torque applications or applications with frequent starts and stops.
- The reduced vibration and noise generated by the cogged design contribute to a quieter operation, making these belts suitable for applications where noise is a consideration.
- The cogged design enhances the durability and resistance to wear, contributing to a longer service life in various applications.


• **TEMPERATURE RANGE:**
-60°F to +250°F. / -51°C to +121°C

BELT PART NUMBER NOMENCLATURE

Belt No: **3VX250**
3V - Profile
X - Molded Cogged
250 - Outside Circumference (Inches in tenths: 25.0")


PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
3VX	25.0	150.0	635.0	3810.0
5VX	35.0	200.0	889.0	5080.0
8VX	100.0	200.0	2540.0	5080.0

*Additional Length May Be Available.
Contact us for more information.

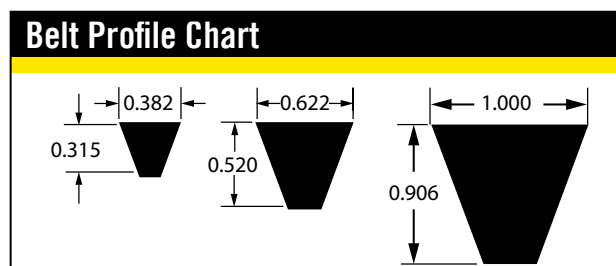

Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
Copyright 2023 The Goodyear Tire & Rubber Company

NARROW CLASSIC COGGED 3VX, 5VX & 8VX V-BELTS



BELT PART NUMBER NOMENCLATURE

Belt No: **3VX250**
3V - Profile
250 - Outside Circumference
(Inches in tenths: 25.0")


3VX					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3VX250	25.00	635	25.49	648	0.11
3VX265	26.50	673	26.99	686	0.11
3VX280	28.00	711	28.49	724	0.11
3VX290	29.00	737	29.49	749	0.13
3VX300	30.00	762	30.49	775	0.13
3VX315	31.50	800	31.99	813	0.13
3VX326	32.60	828	33.09	841	0.13
3VX335	33.50	851	33.99	863	0.15
3VX350	35.00	889	35.49	902	0.15
3VX355	35.50	902	35.99	914	0.15
3VX366	36.60	930	37.09	942	0.15
3VX375	37.50	953	37.99	965	0.15
3VX385	38.50	978	38.99	990	0.18
3VX390	39.00	991	39.49	1003	0.18
3VX400	40.00	1016	40.49	1029	0.18
3VX415	41.50	1054	41.99	1067	0.18
3VX425	42.50	1080	42.99	1092	0.18
3VX450	45.00	1143	45.49	1156	0.2
3VX464	46.40	1179	46.89	1191	0.2
3VX475	47.50	1207	47.99	1219	0.2
3VX487	48.70	1237	49.19	1250	0.22
3VX500	50.00	1270	50.49	1283	0.22
3VX520	52.00	1321	52.49	1333	0.22
3VX530	53.00	1346	53.49	1359	0.22
3VX540	54.00	1372	54.49	1384	0.24
3VX550	55.00	1397	55.49	1410	0.24
3VX560	56.00	1422	56.49	1435	0.24
3VX570	57.00	1448	57.49	1460	0.24
3VX580	58.00	1473	58.49	1486	0.24
3VX590	59.00	1499	59.49	1511	0.26
3VX600	60.00	1524	60.49	1537	0.26
3VX616	61.60	1565	62.09	1577	0.26
3VX630	63.00	1600	63.49	1613	0.26
3VX650	65.00	1651	65.49	1664	0.29
3VX670	67.00	1702	67.49	1714	0.29
3VX690	69.00	1753	69.49	1765	0.29
3VX710	71.00	1803	71.49	1816	0.31
3VX750	75.00	1905	75.49	1918	0.33
3VX771	77.10	1958	77.59	1971	0.33
3VX800	80.00	2032	80.49	2045	0.35

3VX

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3VX826	82.60	2098	83.09	2111	0.35
3VX850	85.00	2159	85.49	2172	0.37
3VX900	90.00	2286	90.49	2299	0.4
3VX926	92.60	2352	93.09	2365	0.4
3VX950	95.00	2413	95.49	2426	0.42
3VX974	97.40	2474	97.89	2487	0.42
3VX1000	100.00	2540	100.49	2553	0.44
3VX1027	102.70	2609	103.19	2621	0.44
3VX1060	106.00	2692	106.49	2705	0.46
3VX1088	108.80	2764	109.29	2776	0.46
3VX1120	112.00	2845	112.49	2857	0.49
3VX1146	114.60	2911	115.09	2923	0.49
3VX1180	118.00	2997	118.49	3010	0.51
3VX1224	122.40	3109	122.89	3122	0.53
3VX1250	125.00	3175	125.49	3188	0.53
3VX1296	129.60	3292	130.09	3304	0.55
3VX1320	132.00	3353	132.49	3365	0.57
3VX1400	140.00	3556	140.49	3569	0.6
3VX1500	150.00	3810	150.49	3823	0.64

BELT PART NUMBER NOMENCLATURE

Belt No: **5VX350**
5V - Profile
X - Molded Cogged
350 - Outside Circumference
(Inches in tenths: 35.0")



5VX

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5VX350	35.00	889	35.49	902	0.4
5VX362	36.20	919	36.69	932	0.42
5VX372	37.20	945	37.69	957	0.42
5VX382	38.20	970	38.69	983	0.44
5VX392	39.20	996	39.69	1008	0.44
5VX402	40.20	1021	40.69	1034	0.46
5VX412	41.20	1046	41.69	1059	0.46
5VX422	42.20	1072	42.69	1084	0.49
5VX433	43.30	1100	43.79	1112	0.49
5VX450	45.00	1143	45.49	1156	0.51
5VX459	45.90	1166	46.39	1178	0.53
5VX470	47.00	1194	47.49	1206	0.53
5VX479	47.90	1217	48.39	1229	0.55
5VX490	49.00	1245	49.49	1257	0.55
5VX500	50.00	1270	50.49	1283	0.57
5VX510	51.00	1295	51.49	1308	0.57


NARROW CLASSIC COGGED 3VX, 5VX & 8VX V-BELTS

5VX continued

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5VX519	51.90	1318	52.39	1331	0.6
5VX530	53.00	1346	53.49	1359	0.6
5VX540	54.00	1372	54.49	1384	0.62
5VX550	55.00	1397	55.49	1410	0.62
5VX560	56.00	1422	56.49	1435	0.64
5VX570	57.00	1448	57.49	1460	0.64
5VX580	58.00	1473	58.49	1486	0.66
5VX590	59.00	1499	59.49	1511	0.66
5VX600	60.00	1524	60.49	1537	0.68
5VX610	61.00	1549	61.49	1562	0.68
5VX619	61.90	1572	62.39	1585	0.71
5VX630	63.00	1600	63.49	1613	0.71
5VX650	65.00	1651	65.49	1664	0.73
5VX660	66.00	1676	66.49	1689	0.75
5VX670	67.00	1702	67.49	1714	0.75
5VX680	68.00	1727	68.49	1740	0.77
5VX690	69.00	1753	69.49	1765	0.77
5VX700	70.00	1778	70.49	1791	0.79
5VX710	71.00	1803	71.49	1816	0.79
5VX720	72.00	1829	72.49	1841	0.82
5VX730	73.00	1854	73.49	1867	0.82
5VX740	74.00	1880	74.49	1892	0.84
5VX750	75.00	1905	75.49	1918	0.84
5VX760	76.00	1930	76.49	1943	0.86
5VX769	76.90	1953	77.39	1966	0.86
5VX780	78.00	1981	78.49	1994	0.88
5VX790	79.00	2007	79.49	2019	0.88
5VX800	80.00	2032	80.49	2045	0.9
5VX810	81.00	2057	81.49	2070	0.9
5VX830	83.00	2108	83.49	2121	0.95
5VX840	84.00	2134	84.49	2146	0.95
5VX850	85.00	2159	85.49	2172	0.97
5VX860	86.00	2184	86.49	2197	0.97
5VX867	86.70	2202	87.19	2215	0.97
5VX880	88.00	2235	88.49	2248	0.99
5VX890	89.00	2261	89.49	2273	1.01
5VX900	90.00	2286	90.49	2299	1.01
5VX990	99.00	2515	99.49	2527	1.12
5VX1000	100.00	2540	100.49	2553	1.12
5VX1017	101.70	2583	102.19	2596	1.15
5VX1030	103.00	2616	103.49	2629	1.17
5VX1050	105.00	2667	105.49	2680	1.19
5VX1060	106.00	2692	106.49	2705	1.19
5VX1080	108.00	2743	108.49	2756	1.21
5VX1108	110.80	2814	111.29	2827	1.26
5VX1120	112.00	2845	112.49	2857	1.26
5VX1139	113.90	2893	114.39	2906	1.28

5VX continued

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5VX1150	115.00	2921	115.49	2934	1.3
5VX1160	116.00	2946	116.49	2959	1.3
5VX1162	116.20	2951	116.69	2964	1.3
5VX1180	118.00	2997	118.49	3010	1.32
5VX1220	122.00	3099	122.49	3111	1.37
5VX1230	123.00	3124	123.49	3137	1.39
5VX1250	125.00	3175	125.49	3188	1.41
5VX1277	127.70	3244	128.19	3256	1.43
5VX1320	132.00	3353	132.49	3365	1.5
5VX1374	137.40	3490	137.89	3503	1.54
5VX1400	140.00	3556	140.49	3569	1.59
5VX1469	146.90	3731	147.39	3744	1.65
5VX1500	150.00	3810	150.49	3823	1.7
5VX1600	160.00	4064	160.49	4077	1.81
5VX1700	170.00	4318	170.49	4331	1.92
5VX1701	170.10	4321	170.59	4333	1.92
5VX1800	180.00	4572	180.49	4585	2.03
5VX1900	190.00	4826	190.49	4839	2.14
5VX2000	200.00	5080	200.49	5093	2.25



BELT PART NUMBER NOMENCLATURE

Belt No: **8VX1000**
8V - Profile
X - Molded Cogged
1000 - Outside Circumference (Inches in tenths: 100.0")

8VX

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
8VX1000	100.00	2540	100.54	2554	3.24
8VX1060	106.00	2692	106.54	2706	3.44
8VX1120	112.00	2845	112.54	2859	3.62
8VX1180	118.00	2997	118.54	3011	3.81
8VX1250	125.00	3175	125.54	3189	4.04
8VX1320	132.00	3353	132.54	3367	4.28
8VX1400	140.00	3556	140.54	3570	4.52
8VX1500	150.00	3810	150.54	3824	4.85
8VX1600	160.00	4064	160.54	4078	5.18
8VX1700	170.00	4318	170.54	4332	5.49
8VX1800	180.00	4572	180.54	4586	5.82
8VX1900	190.00	4826	190.54	4840	6.15
8VX2000	200.00	5080	200.54	5094	6.46


*Additional Length May Be Available.
 Contact us for more information.

SPA-SPZ METRIC WRAPPED V-BELT



Goodyear Belts Metric line is designed to provide excellent durability and service for your equipment and machinery drive requirements. Metric wrapped V-belts are commonly used in various industries due to their durability, efficiency, and versatility. Resistant to wear, heat, and environmental factors for longer operational life.

BELT CONSTRUCTION SPA/SPB/SPC/SPZ

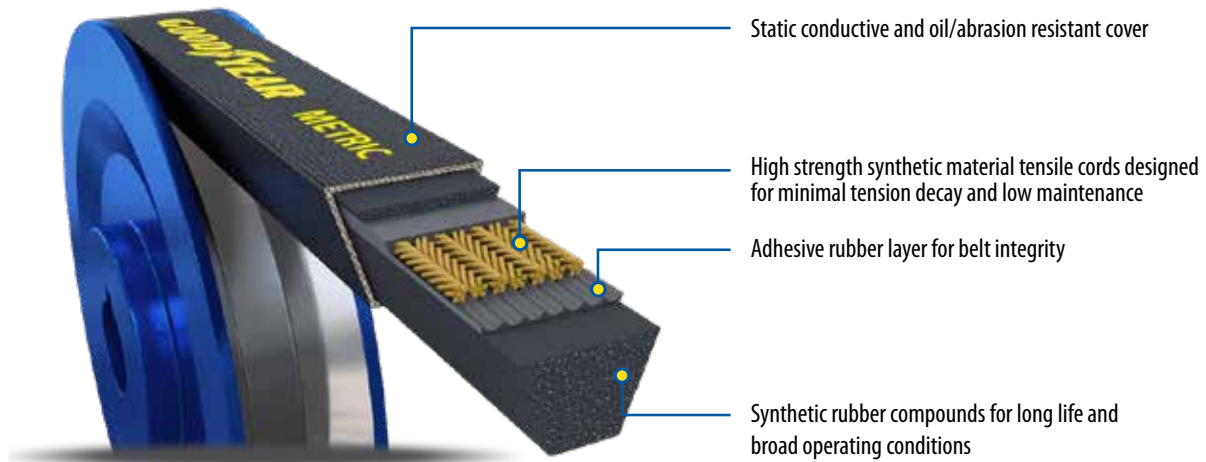

FEATURES & BENEFITS


- Durable, long-life cover.
- Oil resistant & Static resistant.
- High strength cords for minimal tension decay.
- Maximum belt linear speed 138 ft/second.
- **TEMPERATURE RANGE:**
- 30° F to 140° F / -34°C to +60°C

BELT PART NUMBER NOMENCLATURE

Belt No: **SPA 100**
 SP - Wrapped
 A - Profile
 100 - Inside Circumference (mm)


PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
SPA	30	177.79	762	4516
SPB	73.70	316.33	1872	8035
SPC	125.39	418.70	3185	10635
SPZ	124.68	140.43	3167	3567

*Additional Length May Be Available.
 Contact us for more information.

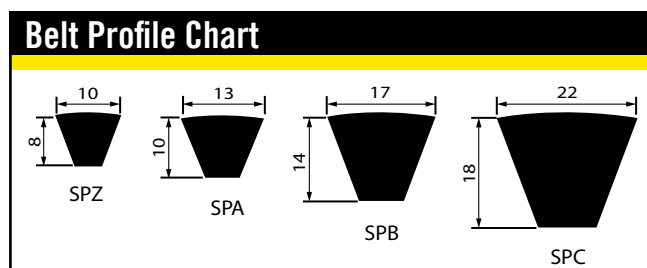


Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
 Copyright 2023 The Goodyear Tire & Rubber Company

SPA-SPZ METRIC WRAPPED V-BELT



BELT PART NUMBER NOMENCLATURE

Belt No: **SPA3150**
 SP - Wrapped
 A - Profile
 3150 - Inside Circumference (mm)



BELT PART NUMBER NOMENCLATURE


Belt No: **SPC3150**
 SP - Wrapped
 C - Profile
 3150 - Inside Circumference (mm)

SPA

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
SPA3070	121.57	3088	121.50	3086	0.845
SPA3082	122.05	3100	121.98	3098	0.848
SPA3150	124.72	3168	124.65	3166	0.867
SPA3182	125.98	3200	125.91	3198	0.876
SPA3282	129.92	3300	129.85	3298	0.903
SPA3350	132.60	3368	132.53	3366	0.922
SPA3482	137.80	3500	137.73	3498	0.958
SPA3550	140.47	3568	140.40	3566	0.977
SPA3750	148.35	3768	148.28	3766	1.032
SPA4000	158.19	4018	158.12	4016	1.101
SPA4250	168.03	4268	167.96	4266	1.17
SPA4500	177.87	4518	177.80	4516	1.238

SPC

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
SPC3150	125.20	3180	125.39	3185	2.606
SPC3350	133.07	3380	133.26	3385	2.771
SPC3550	140.94	3580	141.13	3585	2.937
SPC3750	148.82	3780	149.01	3785	3.102
SPC4000	158.66	4030	158.85	4035	3.309
SPC4000	158.66	4030	158.85	4035	3.309
SPC4250	168.50	4280	168.69	4285	3.516
SPC4500	178.35	4530	178.54	4535	3.723
SPC4750	188.19	4780	188.38	4785	3.93
SPC5000	198.03	5030	198.22	5035	4.137
SPC5300	209.84	5330	210.03	5335	4.385
SPC5600	221.65	5630	221.84	5635	4.633
SPC6000	237.40	6030	237.59	6035	4.964
SPC6300	249.21	6330	249.40	6335	5.212
SPC6700	264.96	6730	265.15	6735	5.543
SPC7100	280.71	7130	280.90	7135	5.874
SPC7500	296.46	7530	296.65	7535	6.205
SPC8000	316.14	8030	316.33	8035	6.619
SPC8500	335.83	8530	336.02	8535	7.032
SPC9000	355.51	9030	355.70	9035	7.446



BELT PART NUMBER NOMENCLATURE


Belt No: **SPB3150**
 SP - Wrapped
 B - Profile
 3150 - Inside Circumference (mm)

SPB

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
SPB2240	88.97	2260	89.17	2265	1.118
SPB3150	125.12	3178	125.40	3185	1.572
SPB3350	132.99	3378	133.27	3385	1.671
SPB3550	140.87	3578	141.15	3585	1.771
SPB3750	148.74	3778	149.02	3785	1.871
SPB3800	150.71	3828	150.99	3835	1.896
SPB4000	158.58	4028	158.86	4035	1.996
SPB4250	168.43	4278	168.71	4285	2.12
SPB4500	178.27	4528	178.55	4535	2.245
SPB4750	188.11	4778	188.39	4785	2.37
SPB5000	197.95	5028	198.23	5035	2.495
SPB5300	209.76	5328	210.04	5335	2.644
SPB5600	221.57	5628	221.85	5635	2.794
SPB6000	237.32	6028	237.60	6035	2.994
SPB6300	249.13	6328	249.41	6335	3.143
SPB6700	264.88	6728	265.16	6735	3.343
SPB7100	280.63	7128	280.91	7135	3.542
SPB7500	296.38	7528	296.66	7535	3.742
SPB8000	316.06	8028	316.34	8035	3.991

BELT PART NUMBER NOMENCLATURE

Belt No: **SPZ3150**
 SP - Wrapped
 Z - Profile
 3150 - Inside Circumference (mm)



SPZ

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
SPZ3150	124.53	3163	124.68	3167	0.555
SPZ3350	132.40	3363	132.55	3367	0.59
SPZ3550	140.28	3563	140.43	3567	0.626


*Additional Length May Be Available.
 Contact us for more information.

XPA-XPZ METRIC COGGED V-BELTS



Goodyear Belts Metric line is designed to provide excellent durability and service for your equipment and machinery drive requirements. Metric cogged raw edge V-belts are a type of power transmission belt designed for use in machinery and equipment with metric specifications. These belts belong to the V-belt family and are characterized by their trapezoidal profile shape and the presence of cogs or notches along the inner surface. The “raw edge” design indicates that the edges of the belt are not covered with fabric or other protective layers, providing a more flexible and efficient contact with the pulleys.

BELT CONSTRUCTION XPA/XPB/XPC/XPZ

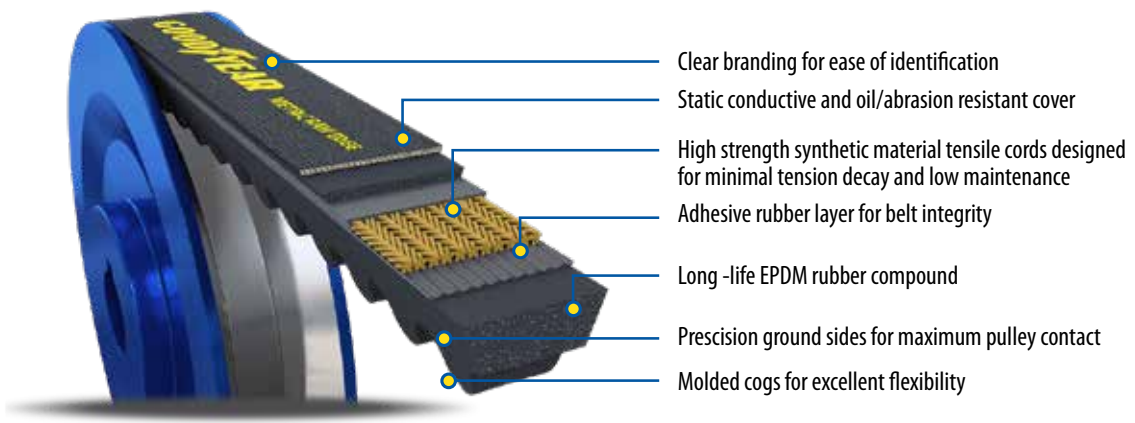

FEATURES & BENEFITS

- Cog design provides increased flexibility and improved heat dissipation.
- Oil resistant & Static resistant.
- Maximum belt linear speed 138 ft/second.


TEMPERATURE RANGE:
 - 13° F to 212° F / -57°C to +121°C

BELT PART NUMBER NOMENCLATURE

Belt No: **XPA630**
 XP - Molded Cogged
 A - Profile
 630 - Inside Circumference (mm)

PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
XPA	25.82	119.13	762	4516
XPB	50.55	316.33	1872	8035
XPC	72.28	418.70	3185	10635
XPZ	24.48	140.43	3167	3567

*Additional Length May Be Available.
 Contact us for more information.

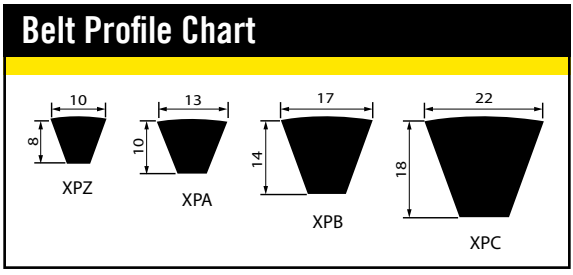


Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
 Copyright 2023 The Goodyear Tire & Rubber Company

XPA-XPZ METRIC COGGED V-BELTS



BELT PART NUMBER NOMENCLATURE



Belt No: **XPA630**
XP - Molded Cogged
A - Profile
630 - Inside Circumference (mm)

XPA

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
XPA630	25.51	648	25.81	656	0.143
XPA670	27.09	688	27.39	696	0.152
XPA730	29.45	748	29.75	756	0.159
XPA732	29.53	750	29.83	758	0.166
XPA750	30.24	768	30.54	776	0.171
XPA760	30.63	778	30.93	786	0.173
XPA762	30.71	780	31.01	788	0.173
XPA772	31.10	790	31.40	798	0.176
XPA782	31.50	800	31.80	808	0.178
XPA800	32.20	818	32.50	826	0.182
XPA832	33.46	850	33.76	858	0.189
XPA850	34.17	868	34.47	876	0.193
XPA900	36.14	918	36.44	926	0.205
XPA910	36.54	928	36.84	936	0.207
XPA922	37.01	940	37.31	948	0.21
XPA932	37.40	950	37.70	958	0.212
XPA950	38.11	968	38.41	976	0.216
XPA967	38.78	985	39.08	993	0.221
XPA982	39.37	1000	39.67	1008	0.223
XPA1000	40.08	1018	40.38	1026	0.227
XPA1032	41.34	1050	41.64	1058	0.235
XPA1060	42.44	1078	42.74	1086	0.241
XPA1082	43.31	1100	43.61	1108	0.246
XPA1107	44.29	1125	44.59	1133	0.252
XPA1120	44.80	1138	45.10	1146	0.255
XPA1132	45.28	1150	45.58	1158	0.258
XPA1150	45.98	1168	46.28	1176	0.262
XPA1157	46.26	1175	46.56	1183	0.263
XPA1180	47.17	1198	47.47	1206	0.268
XPA1207	48.23	1225	48.53	1233	0.275
XPA1232	49.21	1250	49.51	1258	0.28
XPA1250	49.92	1268	50.22	1276	0.284
XPA1257	50.20	1275	50.50	1283	0.286
XPA1272	50.79	1290	51.09	1298	0.289
XPA1332	53.15	1350	53.45	1358	0.303
XPA1340	53.46	1358	53.76	1366	0.305
XPA1357	54.13	1375	54.43	1383	0.309
XPA1360	54.25	1378	54.55	1386	0.309
XPA1375	54.84	1393	55.14	1401	0.313
XPA1382	55.12	1400	55.42	1408	0.314


XPA

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
XPA1400	55.83	1418	56.13	1426	0.318
XPA1407	56.10	1425	56.40	1433	0.32
XPA1425	56.81	1443	57.11	1451	0.324
XPA1430	57.01	1448	57.31	1456	0.325
XPA1432	57.09	1450	57.39	1458	0.326
XPA1450	57.80	1468	58.10	1476	0.33
XPA1457	58.07	1475	58.37	1483	0.331
XPA1482	59.06	1500	59.36	1508	0.337
XPA1500	59.76	1518	60.06	1526	0.341
XPA1507	60.04	1525	60.34	1533	0.343
XPA1525	60.75	1543	61.05	1551	0.347
XPA1532	61.02	1550	61.32	1558	0.348
XPA1550	61.73	1568	62.03	1576	0.353
XPA1557	62.01	1575	62.31	1583	0.354
XPA1582	62.99	1600	63.29	1608	0.36
XPA1600	63.70	1618	64.00	1626	0.364
XPA1607	63.98	1625	64.28	1633	0.366
XPA1630	64.88	1648	65.18	1656	0.371
XPA1632	64.96	1650	65.26	1658	0.371
XPA1650	65.67	1668	65.97	1676	0.375
XPA1657	65.94	1675	66.24	1683	0.377
XPA1662	66.14	1680	66.44	1688	0.377
XPA1675	66.65	1693	66.95	1701	0.381
XPA1680	66.85	1698	67.15	1706	0.382
XPA1682	66.93	1700	67.23	1708	0.383
XPA1700	67.64	1718	67.94	1726	0.387
XPA1707	67.91	1725	68.21	1733	0.388
XPA1732	68.90	1750	69.20	1758	0.394
XPA1750	69.61	1768	69.91	1776	0.398
XPA1757	69.88	1775	70.18	1783	0.4
XPA1782	70.87	1800	71.17	1808	0.405
XPA1800	71.57	1818	71.87	1826	0.409
XPA1807	71.85	1825	72.15	1833	0.411
XPA1832	72.83	1850	73.13	1858	0.417
XPA1850	73.54	1868	73.84	1876	0.421
XPA1857	73.82	1875	74.12	1883	0.422
XPA1882	74.80	1900	75.10	1908	0.428
XPA1900	75.51	1918	75.81	1926	0.432
XPA1907	75.79	1925	76.09	1933	0.434
XPA1932	76.77	1950	77.07	1958	0.439
XPA1950	77.48	1968	77.78	1976	0.443
XPA1982	78.74	2000	79.04	2008	0.451
XPA2000	79.45	2018	79.75	2026	0.455
XPA2032	80.71	2050	81.01	2058	0.462
XPA2057	81.69	2075	81.99	2083	0.468
XPA2082	82.68	2100	82.98	2108	0.474
XPA2120	84.17	2138	84.47	2146	0.482

XPA continued					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
XPA2132	84.65	2150	84.95	2158	0.485
XPA2182	86.61	2200	86.91	2208	0.496
XPA2207	87.60	2225	87.90	2233	0.502
XPA2227	88.39	2245	88.69	2253	0.506
XPA2232	88.58	2250	88.88	2258	0.508
XPA2240	88.90	2258	89.20	2266	0.51
XPA2282	90.55	2300	90.85	2308	0.519
XPA2300	91.26	2318	91.56	2326	0.523
XPA2307	91.54	2325	91.84	2333	0.525
XPA2332	92.52	2350	92.82	2358	0.53
XPA2360	93.62	2378	93.92	2386	0.537
XPA2382	94.49	2400	94.79	2408	0.542
XPA2430	96.38	2448	96.68	2456	0.553
XPA2432	96.46	2450	96.76	2458	0.553
XPA2482	98.43	2500	98.73	2508	0.564
XPA2500	99.13	2518	99.43	2526	0.569
XPA2532	100.39	2550	100.69	2558	0.576
XPA2582	102.36	2600	102.66	2608	0.587
XPA2607	103.35	2625	103.65	2633	0.593
XPA2650	105.04	2668	105.34	2676	0.603
XPA2682	106.30	2700	106.60	2708	0.61
XPA2732	108.27	2750	108.57	2758	0.621
XPA2782	110.24	2800	110.54	2808	0.633
XPA2800	110.94	2818	111.24	2826	0.637
XPA2832	112.20	2850	112.50	2858	0.644
XPA2882	114.17	2900	114.47	2908	0.656
XPA2982	118.11	3000	118.41	3008	0.678
XPA3000	118.82	3018	119.12	3026	0.682

XPB					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
XPB1500	60.16	1528	60.38	1534	0.574
XPB1510	60.55	1538	60.77	1544	0.574
XPB1590	63.70	1618	63.92	1624	0.574
XPB1600	64.09	1628	64.31	1634	0.574
XPB1627	65.16	1655	65.38	1661	0.574
XPB1644	65.83	1672	66.05	1678	0.574
XPB1690	67.64	1718	67.86	1724	0.574
XPB1700	68.03	1728	68.25	1734	0.574
XPB1800	71.97	1828	72.19	1834	0.574
XPB1900	75.91	1928	76.13	1934	0.574
XPB2000	79.84	2028	80.06	2034	0.574
XPB2020	80.63	2048	80.85	2054	0.574
XPB2098	83.70	2126	83.92	2132	0.574
XPB2120	84.57	2148	84.79	2154	0.574
XPB2150	85.75	2178	85.97	2184	0.574
XPB2180	86.93	2208	87.15	2214	0.574
XPB2240	89.29	2268	89.51	2274	0.574
XPB2280	90.87	2308	91.09	2314	0.574
XPB2300	91.65	2328	91.87	2334	0.574
XPB2360	94.02	2388	94.24	2394	0.574
XPB2391	95.24	2419	95.46	2425	0.574
XPB2410	95.98	2438	96.20	2444	0.574
XPB2500	99.53	2528	99.75	2534	0.574
XPB2530	100.71	2558	100.93	2564	0.574
XPB2650	105.43	2678	105.65	2684	0.574
XPB2680	106.61	2708	106.83	2714	0.574
XPB2800	111.34	2828	111.56	2834	0.574
XPB2990	118.82	3018	119.04	3024	0.574
XPB3000	119.21	3028	119.43	3034	0.574

BELT PART NUMBER NOMENCLATURE




Belt No: **XPB1250**
 XP - Molded Cogged
 B - Profile
 1250 - Inside Circumference (mm)

*Additional Length May Be Available.
 Contact us for more information.

XPB					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
XPB1250	50.31	1278	50.53	1284	0.574
XPB1260	50.71	1288	50.93	1294	0.574
XPB1320	53.07	1348	53.29	1354	0.574
XPB1340	53.86	1368	54.08	1374	0.574
XPB1400	56.22	1428	56.44	1434	0.574
XPB1410	56.61	1438	56.83	1444	0.574
XPB1450	58.19	1478	58.41	1484	0.574






BELT PART NUMBER NOMENCLATURE

Belt No: **XPC1800**
 XP - Molded Cogged
 A - Profile
 1800 - Inside Circumference (mm)

XPC					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
XPC1800	72.05	1830	72.30	1836	1.383
XPC2000	79.92	2030	80.41	2036	1.537
XPC2120	84.65	2150	85.14	2156	1.629
XPC2240	89.37	2270	89.86	2276	1.721
XPC2360	94.09	2390	94.58	2396	1.813
XPC2500	99.61	2530	100.10	2536	1.921
XPC2650	105.51	2680	106.00	2686	2.036
XPC2800	111.42	2830	111.91	2836	2.151
XPC3000	119.29	3030	119.78	3036	2.305



BELT PART NUMBER NOMENCLATURE

Belt No: **XPZ630**
 XP - Molded Cogged
 Z - Profile
 630 - Inside Circumference (mm)

XPZ					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
XPZ604	24.29	617	24.49	622	0.078
XPZ612	24.61	625	24.81	630	0.08
XPZ630	25.31	643	25.51	648	0.082
XPZ637	25.59	650	25.79	655	0.083
XPZ640	25.71	653	25.91	658	0.082
XPZ660	26.50	673	26.70	678	0.086
XPZ670	26.89	683	27.09	688	0.087
XPZ672	26.97	685	27.17	690	0.087
XPZ682	27.36	695	27.56	700	0.089
XPZ710	28.46	723	28.66	728	0.092
XPZ722	28.94	735	29.14	740	0.094
XPZ730	29.25	743	29.45	748	0.095
XPZ737	29.53	750	29.73	755	0.096
XPZ750	30.04	763	30.24	768	0.098
XPZ758	30.35	771	30.55	776	0.098
XPZ762	30.51	775	30.71	780	0.099
XPZ787	31.50	800	31.70	805	0.103
XPZ800	32.01	813	32.21	818	0.104
XPZ812	32.48	825	32.68	830	0.106
XPZ825	32.99	838	33.19	843	0.107

XPZ					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
XPZ837	33.46	850	33.66	855	0.109
XPZ850	33.98	863	34.18	868	0.111
XPZ862	34.45	875	34.65	880	0.112
XPZ875	34.96	888	35.16	893	0.114
XPZ887	35.43	900	35.63	905	0.116
XPZ900	35.94	913	36.14	918	0.117
XPZ912	36.42	925	36.62	930	0.119
XPZ925	36.93	938	37.13	943	0.12
XPZ937	37.40	950	37.60	955	0.122
XPZ950	37.91	963	38.11	968	0.124
XPZ962	38.39	975	38.59	980	0.125
XPZ987	39.37	1000	39.57	1005	0.129
XPZ1000	39.88	1013	40.08	1018	0.13
XPZ1010	40.28	1023	40.48	1028	0.131
XPZ1012	40.35	1025	40.55	1030	0.132
XPZ1024	40.83	1037	41.03	1042	0.133
XPZ1037	41.34	1050	41.54	1055	0.135
XPZ1047	41.73	1060	41.93	1065	0.136
XPZ1060	42.24	1073	42.44	1078	0.138
XPZ1077	42.91	1090	43.11	1095	0.14
XPZ1080	43.03	1093	43.23	1098	0.141
XPZ1087	43.31	1100	43.51	1105	0.142
XPZ1112	44.29	1125	44.49	1130	0.145
XPZ1120	44.61	1133	44.81	1138	0.146
XPZ1137	45.28	1150	45.48	1155	0.148
XPZ1140	45.39	1153	45.59	1158	0.148
XPZ1150	45.79	1163	45.99	1168	0.15
XPZ1162	46.26	1175	46.46	1180	0.151
XPZ1180	46.97	1193	47.17	1198	0.154
XPZ1187	47.24	1200	47.44	1205	0.155
XPZ1202	47.83	1215	48.03	1220	0.157
XPZ1210	48.15	1223	48.35	1228	0.158
XPZ1212	48.23	1225	48.43	1230	0.158
XPZ1227	48.82	1240	49.02	1245	0.16
XPZ1237	49.21	1250	49.41	1255	0.161
XPZ1250	49.72	1263	49.92	1268	0.163
XPZ1262	50.20	1275	50.40	1280	0.164
XPZ1270	50.51	1283	50.71	1288	0.165
XPZ1287	51.18	1300	51.38	1305	0.168
XPZ1312	52.17	1325	52.37	1330	0.171
XPZ1320	52.48	1333	52.68	1338	0.172
XPZ1337	53.15	1350	53.35	1355	0.174
XPZ1340	53.27	1353	53.47	1358	0.174
XPZ1362	54.13	1375	54.33	1380	0.177
XPZ1387	55.12	1400	55.32	1405	0.181
XPZ1400	55.63	1413	55.83	1418	0.182
XPZ1412	56.10	1425	56.30	1430	0.184

XPZ continued					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
XPZ1420	56.42	1433	56.62	1438	0.185
XPZ1430	56.81	1443	57.01	1448	0.186
XPZ1437	57.09	1450	57.29	1455	0.187
XPZ1450	57.60	1463	57.80	1468	0.189
XPZ1462	58.07	1475	58.27	1480	0.19
XPZ1470	58.39	1483	58.59	1488	0.191
XPZ1487	59.06	1500	59.26	1505	0.194
XPZ1500	59.57	1513	59.77	1518	0.195
XPZ1512	60.04	1525	60.24	1530	0.197
XPZ1520	60.35	1533	60.55	1538	0.198
XPZ1527	60.63	1540	60.83	1545	0.198
XPZ1537	61.02	1550	61.22	1555	0.2
XPZ1560	61.93	1573	62.13	1578	0.203
XPZ1562	62.01	1575	62.21	1580	0.203
XPZ1587	62.99	1600	63.19	1605	0.207
XPZ1600	63.50	1613	63.70	1618	0.208
XPZ1612	63.98	1625	64.18	1630	0.21
XPZ1637	64.96	1650	65.16	1655	0.213
XPZ1650	65.47	1663	65.67	1668	0.215
XPZ1662	65.94	1675	66.14	1680	0.216
XPZ1687	66.93	1700	67.13	1705	0.22
XPZ1700	67.44	1713	67.64	1718	0.221
XPZ1712	67.91	1725	68.11	1730	0.223
XPZ1737	68.90	1750	69.10	1755	0.226
XPZ1750	69.41	1763	69.61	1768	0.228
XPZ1762	69.88	1775	70.08	1780	0.23
XPZ1787	70.87	1800	71.07	1805	0.233
XPZ1800	71.38	1813	71.58	1818	0.234
XPZ1812	71.85	1825	72.05	1830	0.236
XPZ1837	72.83	1850	73.03	1855	0.239
XPZ1850	73.35	1863	73.55	1868	0.241
XPZ1862	73.82	1875	74.02	1880	0.243
XPZ1887	74.80	1900	75.00	1905	0.246
XPZ1900	75.31	1913	75.51	1918	0.247
XPZ1937	76.77	1950	76.97	1955	0.252
XPZ1950	77.28	1963	77.48	1968	0.254
XPZ1962	77.76	1975	77.96	1980	0.256
XPZ1987	78.74	2000	78.94	2005	0.259
XPZ2000	79.25	2013	79.45	2018	0.26
XPZ2030	80.43	2043	80.63	2048	0.264
XPZ2037	80.71	2050	80.91	2055	0.265
XPZ2062	81.69	2075	81.89	2080	0.269
XPZ2087	82.68	2100	82.88	2105	0.272
XPZ2120	83.98	2133	84.18	2138	0.276
XPZ2137	84.65	2150	84.85	2155	0.278
XPZ2187	86.61	2200	86.81	2205	0.285
XPZ2240	88.70	2253	88.90	2258	0.292

XPZ continued					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
XPZ2280	90.28	2293	90.48	2298	0.297
XPZ2287	90.55	2300	90.75	2305	0.298
XPZ2300	91.06	2313	91.26	2318	0.299
XPZ2360	93.43	2373	93.63	2378	0.307
XPZ2410	95.39	2423	95.59	2428	0.314
XPZ2437	96.46	2450	96.66	2455	0.317
XPZ2487	98.43	2500	98.63	2505	0.324
XPZ2500	98.94	2513	99.14	2518	0.325
XPZ2540	100.51	2553	100.71	2558	0.331
XPZ2650	104.84	2663	105.04	2668	0.345
XPZ2800	110.75	2813	110.95	2818	0.365
XPZ2840	112.32	2853	112.52	2858	0.37
XPZ3000	118.62	3013	118.82	3018	0.391

*Additional Length May Be Available.
Contact us for more information.




DUAL ANGLE CLASSICAL WRAPPED AA, BB, CC V-BELTS



Dual Angled V Belts are widely used in agricultural machinery, rice mills, husker machines, dyeing units, poultry feather pickers, etc. Designed for the application where sudden directional changes in the Belt travel occurs, these changes exert unique stress on the structure of the Belt. Goodyear Dual Angled V Belts are perfectly designed and remain aligned both laterally and longitudinally, in the pulley groove, while operating. antistatic and oil resistant.

BELT CONSTRUCTION

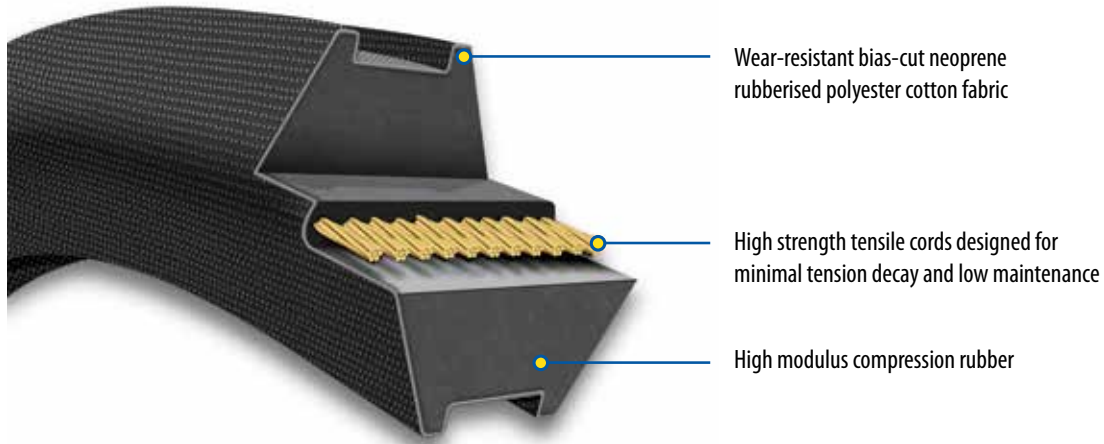

FEATURES & BENEFITS


- Static resistant & Oil resistant.
- Long-life friction resistant cover.
- High strength tensile cords designed for minimal tension decay and low maintenance.
- Wrapped construction, eliminates debris and dust concerns.
- **TEMPERATURE RANGE:**
-22°F to 140°F. / -30°C to 60°C.

BELT PART NUMBER NOMENCLATURE

Belt No: **AA100**
AA - Profile
100 - Inside Circumference (In)


PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
AA	53.07	150.08	1348	3812
BB	44.72	301.14	1136	7649
CC	78.78	421.73	2001	10712

*Additional Length May Be Available.
 Contact us for more information.

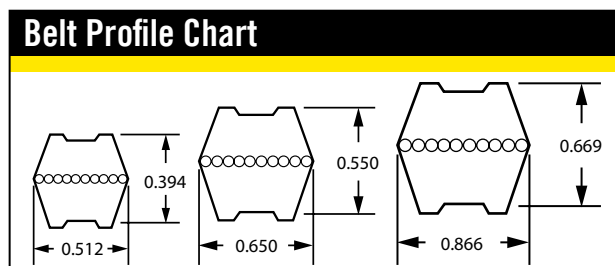

Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
 Copyright 2023 The Goodyear Tire & Rubber Company

DUAL ANGLE CLASSICAL WRAPPED AA, BB, CC V-BELTS




AA

BELT PART NUMBER NOMENCLATURE

Belt No: **A100**
AA - Profile
100 - Inside Circumference (In)

AA

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
AA51	53.07	1348	54.29	1379	0.38
AA55	57.09	1450	58.31	1481	0.41
AA60	62.09	1577	63.31	1608	0.45
AA62	64.09	1628	65.31	1659	0.46
AA64	66.1	1679	67.32	1710	0.48
AA66	68.07	1729	69.29	1760	0.49
AA68	70.08	1780	71.3	1811	0.51
AA70	72.09	1831	73.31	1862	0.52
AA73	75.08	1907	76.3	1938	0.54
AA75	77.09	1958	78.31	1989	0.56
AA78	80.08	2034	81.3	2065	0.58
AA80	82.09	2085	83.31	2116	0.6
AA85	87.09	2212	88.31	2243	0.63
AA88	90.08	2288	91.3	2319	0.66
AA90	92.09	2339	93.31	2370	0.67
AA92	94.09	2390	95.31	2421	0.69
AA96	98.07	2491	99.29	2522	0.72
AA105	107.09	2720	108.31	2751	0.78
AA112	114.09	2898	115.31	2929	0.84
AA120	122.09	3101	123.31	3132	0.9
AA128	130.08	3304	131.3	3335	0.96
AA148	150.08	3812	151.3	3843	1.1



BB

BELT PART NUMBER NOMENCLATURE

Belt No: **B100**
BB - Profile
100 - Inside Circumference (In)

BB

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
BB42	44.72	1136	46.61	1184	0.52
BB43	45.71	1161	47.6	1209	0.54
BB45	47.72	1212	49.61	1260	0.56
BB46	48.7	1237	50.59	1285	0.57
BB51	53.7	1364	55.59	1412	0.64
BB53	55.71	1415	57.6	1463	0.66
BB55	57.72	1466	59.61	1514	0.69
BB60	62.72	1593	64.61	1641	0.75


BB

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
BB64	66.73	1695	68.62	1743	0.8
BB66	68.7	1745	70.59	1793	0.82
BB68	70.71	1796	72.6	1844	0.85
BB71	73.7	1872	75.59	1920	0.89
BB72	74.72	1898	76.61	1946	0.9
BB73	75.71	1923	77.6	1971	0.91
BB74	76.73	1949	78.62	1997	0.92
BB75	77.72	1974	79.61	2022	0.94
BB81	83.7	2126	85.59	2174	1.01
BB83	85.71	2177	87.6	2225	1.04
BB85	87.72	2228	89.61	2276	1.06
BB90	92.72	2355	94.61	2403	1.12
BB92	94.72	2406	96.61	2454	1.15
BB93	95.71	2431	97.6	2479	1.16
BB94	96.73	2457	98.62	2505	1.17
BB96	98.7	2507	100.59	2555	1.2
BB97	99.72	2533	101.61	2581	1.21
BB100	102.72	2609	104.61	2657	1.25
BB103	105.71	2685	107.6	2733	1.28
BB105	107.72	2736	109.61	2784	1.31
BB107	109.72	2787	111.61	2835	1.33
BB108	110.71	2812	112.6	2860	1.35
BB111	113.7	2888	115.59	2936	1.38
BB112	114.72	2914	116.61	2962	1.4
BB114	116.73	2965	118.62	3013	1.42
BB116	118.7	3015	120.59	3063	1.45
BB117	119.72	3041	121.61	3089	1.46
BB118	120.71	3066	122.6	3114	1.47
BB120	122.72	3117	124.61	3165	1.5
BB122	124.72	3168	126.61	3216	1.52
BB123	125.71	3193	127.6	3241	1.53
BB124	126.73	3219	128.62	3267	1.55
BB127	129.72	3295	131.61	3343	1.58
BB128	130.71	3320	132.6	3368	1.6
BB129	131.73	3346	133.62	3394	1.61
BB130	132.72	3371	134.61	3419	1.62
BB133	135.71	3447	137.6	3495	1.66
BB135	137.72	3498	139.61	3546	1.68
BB136	138.7	3523	140.59	3571	1.7
BB140	142.72	3625	144.61	3673	1.75
BB144	146.73	3727	148.62	3775	1.8
BB155	157.72	4006	159.61	4054	1.93
BB158	160.71	4082	162.6	4130	1.97
BB162	164.72	4184	166.61	4232	2.02
BB168	170.71	4336	172.6	4384	2.1
BB169	171.73	4362	173.62	4410	2.11
BB170	172.72	4387	174.61	4435	2.12

DUAL ANGLE CLASSICAL WRAPPED AA, BB, CC V-BELTS

BB continued

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
BB173	175.71	4463	177.6	4511	2.16
BB180	182.72	4641	184.61	4689	2.25
BB182	184.72	4692	186.61	4740	2.27
BB187	189.72	4819	191.61	4867	2.33
BB190	192.72	4895	194.61	4943	2.37
BB195	197.72	5022	199.61	5070	2.43
BB210	212.72	5403	214.61	5451	2.62
BB225	226.14	5744	228.03	5792	2.81
BB226	227.13	5769	229.02	5817	2.82
BB228	229.13	5820	231.02	5868	2.84
BB230	231.14	5871	233.03	5919	2.87
BB240	241.14	6125	243.03	6173	2.99
BB255	256.14	6506	258.03	6554	3.18
BB270	271.14	6887	273.03	6935	3.37
BB277	278.15	7065	280.04	7113	3.46
BB285	286.14	7268	288.03	7316	3.56
BB300	301.14	7649	303.03	7697	3.74



BELT PART NUMBER NOMENCLATURE

Belt No: **C100**
CC - Profile
100 - Inside Circumference (In)

CC

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
CC75	78.78	2001	80.91	2055	1.62
CC81	84.76	2153	86.89	2207	1.75
CC85	88.78	2255	90.91	2309	1.83
CC90	93.78	2382	95.91	2436	1.94
CC96	99.76	2534	101.89	2588	2.07
CC105	108.78	2763	110.91	2817	2.27
CC112	115.79	2941	117.91	2995	2.42
CC128	131.77	3347	133.9	3401	2.76
CC136	139.76	3550	141.89	3604	2.93
CC140	143.78	3652	145.91	3706	3.02
CC144	147.8	3754	149.92	3808	3.11
CC158	161.77	4109	163.9	4163	3.41
CC162	165.79	4211	167.91	4265	3.5
CC173	176.77	4490	178.9	4544	3.73
CC180	183.78	4668	185.91	4722	3.88
CC195	198.78	5049	200.91	5103	4.21
CC210	213.78	5430	215.91	5484	4.53
CC240	241.73	6140	243.86	6194	5.18
CC255	256.73	6521	258.86	6575	5.5

CC

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
CC270	271.73	6902	273.86	6956	5.83
CC300	301.73	7664	303.86	7718	6.47
CC330	331.73	8426	333.86	8480	7.12
CC360	361.73	9188	363.86	9242	7.77
CC390	391.73	9950	393.86	10004	8.41
CC420	421.73	10712	423.86	10766	9.06

*Additional Length May Be Available.
 Contact us for more information.




DUAL ANGLE CLASSICAL COGGED AAX, BBX “CHICKEN PLUCKER” V-BELTS



Goodyear Belts has developed Double Angle Classical Cogged V-Belts that offer premium performance, ensuring a long service life. Double Angled Cogged V-Belt are engineered to handle the unique challenges such as moisture, dust, and debris commonly encountered in poultry processing facilities.

BELT CONSTRUCTION AAX/BBX

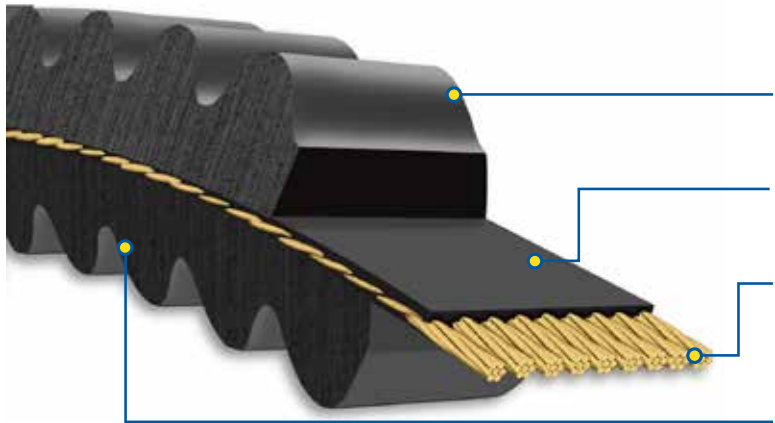

- Molded cogs for excellent flexibility
- Adhesive rubber layer for belt integrity
- High strength tensile cords designed for minimal tension decay and low maintenance
- EPDM rubber compounds for long life and broad operating condition

FEATURES & BENEFITS

- Double Angled Cogged V-Belt design provides better grip and minimizes the risk of slipping.
- High strength tensile cords designed for minimal tension decay and low maintenance.
- Double Angled Cogged V-Belt are engineered to handle the unique challenges such as moisture, dust, and debris commonly encountered in poultry processing facilities.
- **TEMPERATURE RANGE:**
-22°F to 140°F / -30°C to +60°C


BELT PART NUMBER NOMENCLATURE

Belt No: **AAX148**
AA - Profile
X - Molded Dual Cogged
148 - Inside Circumference (In)

PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
AAX	150.08	3812	13	11
BBX	157.72	4006	17	15.75


*Additional Length May Be Available.
 Contact us for more information.

Belt Profile Chart

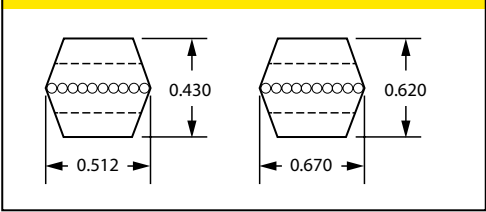


Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
 Copyright 2023 The Goodyear Tire & Rubber Company

DUAL ANGLE CLASSICAL COGGED AAX, BBX “CHICKEN PLUCKER” V-BELTS



BELT PART NUMBER NOMENCLATURE

Belt No: **AAX100**
AA - Profile
X - Molded Dual Cogged
100 - Inside Circumference (In)



BELT PART NUMBER NOMENCLATURE

Belt No: **BBX100**
BB - Profile
X - Molded Dual Cogged
100 - Inside Circumference (In)

AAX

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
AAX148	150.08	3812	151.3	3843	0.88

BBX


Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
BBX155	157.72	4006	159.61	4054	1.83
BBX158	160.71	4082	162.6	4130	1.86
BBX172	174.72	4438	176.61	4486	2.03

*Additional Length May Be Available.
 Contact us for more information.



Designed as an alternative to conventional light-duty belts, with high-performance construction to deliver more horsepower, less stretch, and provide longer service life.

BELT CONSTRUCTION 3LK/4LK/5LK

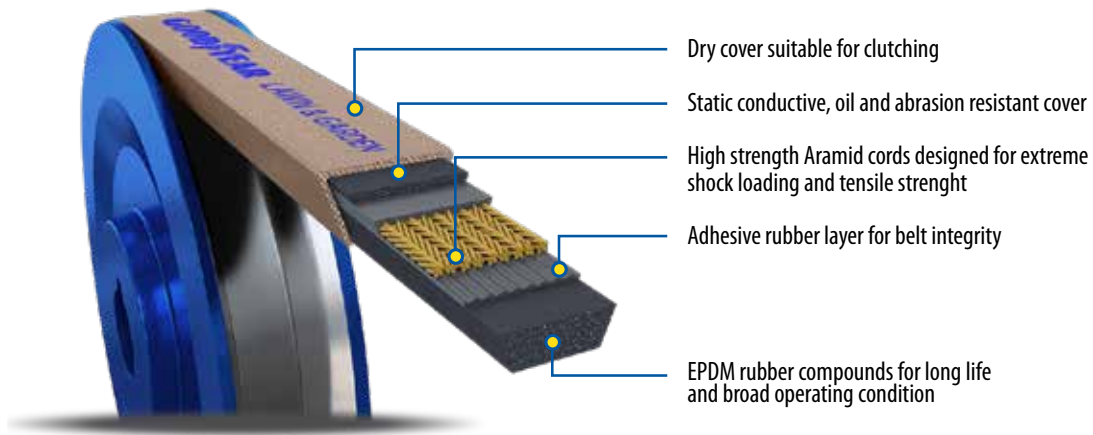

FEATURES & BENEFITS

- Suitable for outdoor power equipment, appliances, and industrial applications where Fractional Horsepower (FHP) belts are typically used.
- Low cord positioning in thin profile gives extreme flexibility.
- Meets ARPM/RMA IP-3-2 oil and heat resistant standards.
- REACH and RoHS 2 compliant.
- **TEMPERATURE RANGE:**
-22°F to 140°F / -30°C to +60°C

BELT PART NUMBER NOMENCLATURE

Belt No: **3LK200**
3L - Profile
K - Aramid Cord
200 - Outside Circumference (Inches in tenths: 20.0")


PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
3LK	17	74	432	1880
4LK	18	117	457	2972
5LK	23	100	584	2540

*Additional Length May Be Available.
Contact us for more information.

Belt Profile Chart

PROFILE	WIDTH (INCH)	THICKNESS (INCH)	WIDTH (MM)	THICKNESS (MM)
3LK	0.380	0.220	9.65	5.59
4LK	0.500	0.310	12.70	7.87
5LK	0.657	0.380	16.70	9.65

Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
Copyright 2023 The Goodyear Tire & Rubber Company




BELT PART NUMBER NOMENCLATURE

Belt No: **3LK170**
3L - Profile
K - Aramid Cord
170 - Inside Circumference
 (Inches in tenths: 17.0")

3LK					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3LK170	17	432	17.0	432	0.06
3LK180	18	457	18.0	457	0.06
3LK190	19	483	19.0	483	0.06
3LK200	20	508	20.0	508	0.07
3LK210	21	533	21.0	533	0.07
3LK220	22	559	22.0	559	0.07
3LK230	23	584	23.0	584	0.08
3LK240	24	610	24.0	610	0.08
3LK250	25	635	25.0	635	0.08
3LK260	26	660	26.0	660	0.09
3LK270	27	686	27.0	686	0.09
3LK280	28	711	28.0	711	0.09
3LK290	29	737	29.0	737	0.1
3LK300	30	762	30.0	762	0.1
3LK310	31	787	31.0	787	0.11
3LK320	32	813	32.0	813	0.11
3LK330	33	838	33.0	838	0.11
3LK340	34	864	34.0	864	0.12
3LK350	35	889	35.0	889	0.12
3LK360	36	914	36.0	914	0.12
3LK370	37	940	37.0	940	0.13
3LK380	38	965	38.0	965	0.13
3LK390	39	991	39.0	991	0.13
3LK400	40	1016	40.0	1016	0.14
3LK410	41	1041	41.0	1041	0.14
3LK420	42	1067	42.0	1067	0.14
3LK430	43	1092	43.0	1092	0.15
3LK440	44	1118	44.0	1118	0.15
3LK450	45	1143	45.0	1143	0.15
3LK460	46	1168	46.0	1168	0.16
3LK470	47	1194	47.0	1194	0.16
3LK480	48	1219	48.0	1219	0.16
3LK490	49	1245	49.0	1245	0.17
3LK500	50	1270	50.0	1270	0.17
3LK510	51	1295	51.0	1295	0.17
3LK520	52	1321	52.0	1321	0.18
3LK530	53	1346	53.0	1346	0.18
3LK540	54	1372	54.0	1372	0.18
3LK550	55	1397	55.0	1397	0.19
3LK560	56	1422	56.0	1422	0.19

3LK					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3LK570	57	1448	57.0	1448	0.19
3LK580	58	1473	58.0	1473	0.2
3LK590	59	1499	59.0	1499	0.2
3LK600	60	1524	60.0	1524	0.2
3LK610	61	1549	61.0	1549	0.21
3LK620	62	1575	62.0	1575	0.21
3LK630	63	1600	63.0	1600	0.21
3LK640	64	1626	64.0	1626	0.22
3LK650	65	1651	65.0	1651	0.22
3LK660	66	1676	66.0	1676	0.22
3LK740	74	1880	74.0	1880	0.25



BELT PART NUMBER NOMENCLATURE

Belt No: **4LK180**
4L - Profile
K - Aramid Cord
180 - Inside Circumference
 (Inches in tenths: 18.0")

4LK					
Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
4LK180	18	457	18.0	457	0.11
4LK190	19	483	19.0	483	0.11
4LK200	20	508	20.0	508	0.12
4LK210	21	533	21.0	533	0.13
4LK220	22	559	22.0	559	0.13
4LK230	23	584	23.0	584	0.14
4LK240	24	610	24.0	610	0.14
4LK250	25	635	25.0	635	0.15
4LK260	26	660	26.0	660	0.16
4LK270	27	686	27.0	686	0.16
4LK280	28	711	28.0	711	0.17
4LK290	29	737	29.0	737	0.17
4LK300	30	762	30.0	762	0.18
4LK310	31	787	31.0	787	0.19
4LK320	32	813	32.0	813	0.19
4LK330	33	838	33.0	838	0.2
4LK340	34	864	34.0	864	0.2
4LK350	35	889	35.0	889	0.21
4LK360	36	914	36.0	914	0.22
4LK370	37	940	37.0	940	0.22
4LK380	38	965	38.0	965	0.23
4LK410	41	1041	41.0	1041	0.25
4LK420	42	1067	42.0	1067	0.25
4LK430	43	1092	43.0	1092	0.26


4LK Continue

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
4LK440	44	1118	44.0	1118	0.26
4LK450	45	1143	45.0	1143	0.27
4LK460	46	1168	46.0	1168	0.28
4LK470	47	1194	47.0	1194	0.28
4LK480	48	1219	48.0	1219	0.29
4LK490	49	1245	49.0	1245	0.29
4LK500	50	1270	50.0	1270	0.3
4LK510	51	1295	51.0	1295	0.31
4LK520	52	1321	52.0	1321	0.31
4LK530	53	1346	53.0	1346	0.32
4LK540	54	1372	54.0	1372	0.32
4LK550	55	1397	55.0	1397	0.33
4LK560	56	1422	56.0	1422	0.34
4LK570	57	1448	57.0	1448	0.34
4LK580	58	1473	58.0	1473	0.35
4LK590	59	1499	59.0	1499	0.35
4LK600	60	1524	60.0	1524	0.36
4LK610	61	1549	61.0	1549	0.37
4LK620	62	1575	62.0	1575	0.37
4LK630	63	1600	63.0	1600	0.38
4LK640	64	1626	64.0	1626	0.38
4LK650	65	1651	65.0	1651	0.39
4LK660	66	1676	66.0	1676	0.4
4LK670	67	1702	67.0	1702	0.4
4LK680	68	1727	68.0	1727	0.41
4LK690	69	1753	69.0	1753	0.41
4LK700	70	1778	70.0	1778	0.42
4LK710	71	1803	71.0	1803	0.43
4LK720	72	1829	72.0	1829	0.43
4LK730	73	1854	73.0	1854	0.44
4LK740	74	1880	74.0	1880	0.44
4LK750	75	1905	75.0	1905	0.45
4LK760	76	1930	76.0	1930	0.46
4LK770	77	1956	77.0	1956	0.46
4LK780	78	1981	78.0	1981	0.47
4LK790	79	2007	79.0	2007	0.47
4LK800	80	2032	80.0	2032	0.48
4LK810	81	2057	81.0	2057	0.49
4LK820	82	2083	82.0	2083	0.49
4LK830	83	2108	83.0	2108	0.5
4LK840	84	2134	84.0	2134	0.5
4LK850	85	2159	85.0	2159	0.51
4LK860	86	2184	86.0	2184	0.52
4LK870	87	2210	87.0	2210	0.52
4LK880	88	2235	88.0	2235	0.53
4LK890	89	2261	89.0	2261	0.53
4LK900	90	2286	90.0	2286	0.54

4LK Continue

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
4LK910	91	2311	91.0	2311	0.55
4LK920	92	2337	92.0	2337	0.55
4LK930	93	2362	93.0	2362	0.56
4LK940	94	2388	94.0	2388	0.56
4LK950	95	2413	95.0	2413	0.57
4LK960	96	2438	96.0	2438	0.58
4LK970	97	2464	97.0	2464	0.58
4LK980	98	2489	98.0	2489	0.59
4LK990	99	2515	99.0	2515	0.59
4LK1000	100	2540	100.0	2540	0.6
4LK1050	105	2667	#N/A	#N/A	0.63
4LK1070	107	2718	#N/A	#N/A	0.64
4LK1170	117	2972	#N/A	#N/A	0.7

BELT PART NUMBER NOMENCLATURE



Belt No: 5LK230
 5L - Profile
 K - Aramid Cord
 100 - Inside Circumference (Inches in tenths: 23.0)

5LK

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5LK230	23	584	23.0	584	0.21
5LK240	24	610	24.0	610	0.22
5LK250	25	635	25.0	635	0.23
5LK260	26	660	26.0	660	0.24
5LK270	27	686	27.0	686	0.25
5LK280	28	711	28.0	711	0.26
5LK290	29	737	29.0	737	0.27
5LK300	30	762	30.0	762	0.28
5LK310	31	787	31.0	787	0.28
5LK320	32	813	32.0	813	0.29
5LK330	33	838	33.0	838	0.3
5LK340	34	864	34.0	864	0.31
5LK350	35	889	35.0	889	0.32
5LK360	36	914	36.0	914	0.33
5LK370	37	940	37.0	940	0.34
5LK380	38	965	38.0	965	0.35
5LK390	39	991	39.0	991	0.36
5LK400	40	1016	40.0	1016	0.37
5LK410	41	1041	41.0	1041	0.38
5LK420	42	1067	42.0	1067	0.39
5LK430	43	1092	43.0	1092	0.39
5LK440	44	1118	44.0	1118	0.4

5LK Continue

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
5LK450	45	1143	45.0	1143	0.41
5LK460	46	1168	46.0	1168	0.42
5LK470	47	1194	47.0	1194	0.43
5LK480	48	1219	48.0	1219	0.44
5LK490	49	1245	49.0	1245	0.45
5LK500	50	1270	50.0	1270	0.46
5LK510	51	1295	51.0	1295	0.47
5LK520	52	1321	52.0	1321	0.48
5LK530	53	1346	53.0	1346	0.49
5LK540	54	1372	54.0	1372	0.5
5LK550	55	1397	55.0	1397	0.51
5LK560	56	1422	56.0	1422	0.51
5LK570	57	1448	57.0	1448	0.52
5LK580	58	1473	58.0	1473	0.53
5LK590	59	1499	59.0	1499	0.54
5LK600	60	1524	60.0	1524	0.55
5LK610	61	1549	61.0	1549	0.56
5LK620	62	1575	62.0	1575	0.57
5LK630	63	1600	63.0	1600	0.58
5LK640	64	1626	64.0	1626	0.59
5LK650	65	1651	65.0	1651	0.6
5LK660	66	1676	66.0	1676	0.61
5LK670	67	1702	67.0	1702	0.62
5LK680	68	1727	68.0	1727	0.62
5LK690	69	1753	69.0	1753	0.63
5LK700	70	1778	70.0	1778	0.64
5LK710	71	1803	71.0	1803	0.65
5LK720	72	1829	72.0	1829	0.66
5LK730	73	1854	73.0	1854	0.67
5LK740	74	1880	74.0	1880	0.68
5LK750	75	1905	75.0	1905	0.69
5LK760	76	1930	76.0	1930	0.7
5LK770	77	1956	77.0	1956	0.71
5LK780	78	1981	78.0	1981	0.72
5LK790	79	2007	79.0	2007	0.73
5LK800	80	2032	80.0	2032	0.73
5LK810	81	2057	81.0	2057	0.74
5LK820	82	2083	82.0	2083	0.75
5LK830	83	2108	83.0	2108	0.76
5LK840	84	2134	84.0	2134	0.77
5LK850	85	2159	85.0	2159	0.78
5LK860	86	2184	86.0	2184	0.79
5LK870	87	2210	87.0	2210	0.8
5LK880	88	2235	88.0	2235	0.81
5LK890	89	2261	89.0	2261	0.82
5LK900	90	2286	90.0	2286	0.83
5LK910	91	2311	91.0	2311	0.84

5LK Continue

Belt No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
5LK920	92	2337	92.0	2337	0.84
5LK930	93	2362	93.0	2362	0.85
5LK940	94	2388	94.0	2388	0.86
5LK950	95	2413	95.0	2413	0.87
5LK960	96	2438	96.0	2438	0.88
5LK970	97	2464	97.0	2464	0.89
5LK980	98	2489	98.0	2489	0.9
5LK990	99	2515	99.0	2515	0.91
5LK1000	100	2540	100.0	2540	0.92

*Additional Length May Be Available.
Contact us for more information.




BANDED CLASSIC WRAPPED V-BELTS



Banded Classic Wrapped V-Belts are chosen for applications where the load and power transmission requirements exceed the capabilities of individual V-belts. Their design provides additional strength, stability, and resistance to wear, making them a reliable choice for various industrial and commercial applications. Banded V-belts consist of multiple individual V-belts joined together by a band. The band helps to distribute the load evenly across the belts, providing additional support.

BELT CONSTRUCTION A / B / C / D

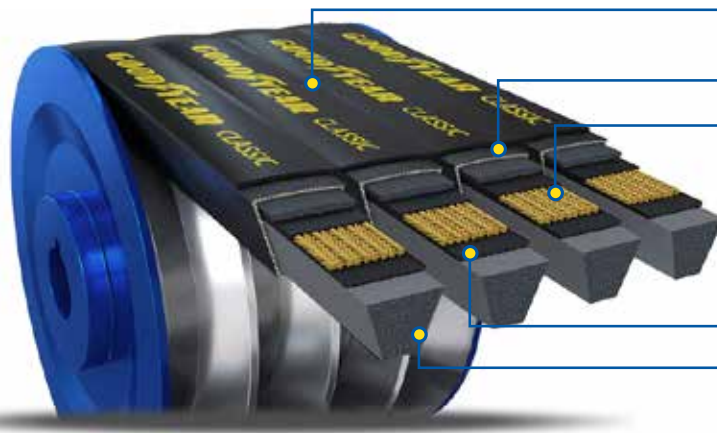

- Durable tie-band construction to prevent belt whip and turnover
- Static conductive, oil and abrasion resistant cover
- High strength synthetic material tensile cords designed for minimal tension decay and low maintenance
- Adhesive rubber layer for belt integrity
- Synthetic rubber compounds for long life and broad operating condition

FEATURES & BENEFITS


- Better Resistance to Heat and Oil:** The wrapped construction of the belts and the additional band contribute to better resistance against heat and oil, making them suitable for a wide range of industrial applications.
- Enhanced Load-Carrying Capacity:** The band in Banded Classic Wrapped V-Belts adds strength and stability, allowing them to handle higher loads and transmit more power compared to individual, non-banded V-belts
- Reduced Belt Flutter:** The band minimizes the flutter or vibration that individual belts may experience during operation, especially in high torque or high-speed applications. This contributes to smoother and more stable power transmission.
- Extended Service Life:** Banded Classic Wrapped V-Belts are designed for increased durability and a longer service life, even in challenging operating conditions.
- TEMPERATURE RANGE:**
-22°F to 140°F / -30°C to +60°C

BELT PART NUMBER NOMENCLATURE

Belt No: **2/A100**
2/ - Number of Ribs: 2
A - Profile
100 - Inside Circumference (In)


PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
A	42.0	180.0	1066.8	4572.0
B	35.0	315.0	889.0	8001.0
C	60.0	420.0	1524.0	10784.3
D	144.0	420.0	3657.60	10668.0

*Additional Length May Be Available.
 Contact us for more information.

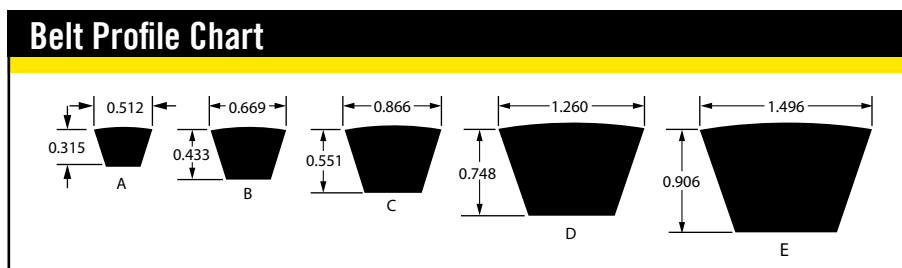

Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
 Copyright 2023 The Goodyear Tire & Rubber Company

BANDED CLASSIC WRAPPED V-BELTS



BELT PART NUMBER NOMENCLATURE

Belt No: **2/A100**
2/ - Number of Ribs: 2
A - Profile
100 - Inside Circumference (In)

A						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/A42	2	43.98	1117	45.09	1145.3	0.8
2/A43	2	44.96	1142	46.07	1170.2	0.82
2/A44	2	45.98	1168	47.1	1196.3	0.84
2/A46	2	47.95	1218	49.07	1246.4	0.88
2/A47	2	48.98	1244	50.09	1272.3	0.9
2/A48	2	49.96	1269	51.07	1297.2	0.92
2/A49	2	50.98	1295	52.1	1323.3	0.92
2/A51	2	52.95	1345	54.07	1373.4	0.96
2/A53	2	54.96	1396	56.07	1424.2	1
2/A54	2	55.98	1422	57.1	1450.3	1.02
2/A55	2	56.97	1447	58.08	1475.2	1.04
2/A56	2	57.95	1472	59.07	1500.4	1.06
2/A57	2	58.98	1498	60.09	1526.3	1.08
2/A58	2	59.96	1523	61.07	1551.2	1.1
2/A60	2	61.97	1574	63.08	1602.2	1.14
2/A62	2	63.98	1625	65.09	1653.3	1.18
2/A64	2	65.98	1676	67.1	1704.3	1.22
2/A65	2	66.97	1701	68.08	1729.2	1.24
2/A66	2	67.95	1726	69.07	1754.4	1.26
2/A68	2	69.96	1777	71.07	1805.2	1.28
2/A70	2	71.97	1828	73.08	1856.2	1.32
2/A71	2	72.95	1853	74.07	1881.4	1.34
2/A74	2	75.98	1930	77.1	1958.3	1.4
2/A75	2	76.97	1955	78.08	1983.2	1.42
2/A77	2	78.98	2006	80.09	2034.3	1.46
2/A78	2	79.96	2031	81.07	2059.2	1.48
2/A80	2	81.97	2082	83.08	2110.2	1.52
2/A81	2	82.95	2107	84.07	2135.4	1.54
2/A83	2	84.96	2158	86.07	2186.2	1.58
2/A85	2	86.97	2209	88.08	2237.2	1.62
2/A90	2	91.97	2336	93.08	2364.2	1.7
2/A92	2	93.98	2387	95.09	2415.3	1.74
2/A96	2	97.95	2488	99.07	2516.4	1.82
2/A100	2	101.97	2590	103.08	2618.2	1.9
2/A105	2	106.97	2717	108.08	2745.2	2
2/A110	2	111.97	2844	113.08	2872.2	2.08
2/A112	2	113.98	2895	115.09	2923.3	2.12
2/A120	2	121.97	3098	123.08	3126.2	2.28
2/A128	2	129.96	3301	131.07	3329.2	2.42
2/A136	2	137.95	3504	139.07	3532.4	2.58

A						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/A144	2	145.98	3708	147.1	3736.3	2.74
2/A158	2	159.96	4063	161.07	4091.2	3
2/A173	2	174.96	4444	176.07	4472.2	3.28
2/A180	2	181.97	4622	183.08	4650.2	3.42
3/A42	3	43.98	1117	45.09	1145.3	1.2
3/A43	3	44.96	1142	46.07	1170.2	1.23
3/A44	3	45.98	1168	47.1	1196.3	1.26
3/A46	3	47.95	1218	49.07	1246.4	1.32
3/A47	3	48.98	1244	50.09	1272.3	1.35
3/A48	3	49.96	1269	51.07	1297.2	1.38
3/A49	3	50.98	1295	52.1	1323.3	1.38
3/A51	3	52.95	1345	54.07	1373.4	1.44
3/A53	3	54.96	1396	56.07	1424.2	1.5
3/A54	3	55.98	1422	57.1	1450.3	1.53
3/A55	3	56.97	1447	58.08	1475.2	1.56
3/A56	3	57.95	1472	59.07	1500.4	1.59
3/A57	3	58.98	1498	60.09	1526.3	1.62
3/A58	3	59.96	1523	61.07	1551.2	1.65
3/A60	3	61.97	1574	63.08	1602.2	1.71
3/A62	3	63.98	1625	65.09	1653.3	1.77
3/A64	3	65.98	1676	67.1	1704.3	1.83
3/A65	3	66.97	1701	68.08	1729.2	1.86
3/A66	3	67.95	1726	69.07	1754.4	1.89
3/A68	3	69.96	1777	71.07	1805.2	1.92
3/A70	3	71.97	1828	73.08	1856.2	1.98
3/A71	3	72.95	1853	74.07	1881.4	2.01
3/A74	3	75.98	1930	77.1	1958.3	2.1
3/A75	3	76.97	1955	78.08	1983.2	2.13
3/A77	3	78.98	2006	80.09	2034.3	2.19
3/A78	3	79.96	2031	81.07	2059.2	2.22
3/A80	3	81.97	2082	83.08	2110.2	2.28
3/A81	3	82.95	2107	84.07	2135.4	2.31
3/A83	3	84.96	2158	86.07	2186.2	2.37
3/A85	3	86.97	2209	88.08	2237.2	2.43
3/A90	3	91.97	2336	93.08	2364.2	2.55
3/A92	3	93.98	2387	95.09	2415.3	2.61
3/A96	3	97.95	2488	99.07	2516.4	2.73
3/A100	3	101.97	2590	103.08	2618.2	2.85
3/A105	3	106.97	2717	108.08	2745.2	3
3/A110	3	111.97	2844	113.08	2872.2	3.12
3/A112	3	113.98	2895	115.09	2923.3	3.18
3/A120	3	121.97	3098	123.08	3126.2	3.42
3/A128	3	129.96	3301	131.07	3329.2	3.63
3/A136	3	137.95	3504	139.07	3532.4	3.87
3/A144	3	145.98	3708	147.1	3736.3	4.11
3/A158	3	159.96	4063	161.07	4091.2	4.5
3/A173	3	174.96	4444	176.07	4472.2	4.92

BANDED CLASSIC WRAPPED V-BELTS



A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3/A180	3	181.97	4622	183.08	4650.2	5.13
4/A42	4	43.98	1117	45.09	1145.3	1.6
4/A43	4	44.96	1142	46.07	1170.2	1.64
4/A44	4	45.98	1168	47.1	1196.3	1.68
4/A46	4	47.95	1218	49.07	1246.4	1.76
4/A47	4	48.98	1244	50.09	1272.3	1.8
4/A48	4	49.96	1269	51.07	1297.2	1.84
4/A49	4	50.98	1295	52.1	1323.3	1.84
4/A51	4	52.95	1345	54.07	1373.4	1.92
4/A53	4	54.96	1396	56.07	1424.2	2
4/A54	4	55.98	1422	57.1	1450.3	2.04
4/A55	4	56.97	1447	58.08	1475.2	2.08
4/A56	4	57.95	1472	59.07	1500.4	2.12
4/A57	4	58.98	1498	60.09	1526.3	2.16
4/A58	4	59.96	1523	61.07	1551.2	2.2
4/A60	4	61.97	1574	63.08	1602.2	2.28
4/A62	4	63.98	1625	65.09	1653.3	2.36
4/A64	4	65.98	1676	67.1	1704.3	2.44
4/A65	4	66.97	1701	68.08	1729.2	2.48
4/A66	4	67.95	1726	69.07	1754.4	2.52
4/A68	4	69.96	1777	71.07	1805.2	2.56
4/A70	4	71.97	1828	73.08	1856.2	2.64
4/A71	4	72.95	1853	74.07	1881.4	2.68
4/A74	4	75.98	1930	77.1	1958.3	2.8
4/A75	4	76.97	1955	78.08	1983.2	2.84
4/A77	4	78.98	2006	80.09	2034.3	2.92
4/A78	4	79.96	2031	81.07	2059.2	2.96
4/A80	4	81.97	2082	83.08	2110.2	3.04
4/A81	4	82.95	2107	84.07	2135.4	3.08
4/A83	4	84.96	2158	86.07	2186.2	3.16
4/A85	4	86.97	2209	88.08	2237.2	3.24
4/A90	4	91.97	2336	93.08	2364.2	3.4
4/A92	4	93.98	2387	95.09	2415.3	3.48
4/A96	4	97.95	2488	99.07	2516.4	3.64
4/A100	4	101.97	2590	103.08	2618.2	3.8
4/A105	4	106.97	2717	108.08	2745.2	4
4/A110	4	111.97	2844	113.08	2872.2	4.16
4/A112	4	113.98	2895	115.09	2923.3	4.24
4/A120	4	121.97	3098	123.08	3126.2	4.56
4/A128	4	129.96	3301	131.07	3329.2	4.84
4/A136	4	137.95	3504	139.07	3532.4	5.16
4/A144	4	145.98	3708	147.1	3736.3	5.48
4/A158	4	159.96	4063	161.07	4091.2	6
4/A173	4	174.96	4444	176.07	4472.2	6.56
4/A180	4	181.97	4622	183.08	4650.2	6.84
5/A42	5	43.98	1117	45.09	1145.3	2
5/A43	5	44.96	1142	46.07	1170.2	2.05

A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5/A44	5	45.98	1168	47.1	1196.3	2.1
5/A46	5	47.95	1218	49.07	1246.4	2.2
5/A47	5	48.98	1244	50.09	1272.3	2.25
5/A48	5	49.96	1269	51.07	1297.2	2.3
5/A49	5	50.98	1295	52.1	1323.3	2.3
5/A51	5	52.95	1345	54.07	1373.4	2.4
5/A53	5	54.96	1396	56.07	1424.2	2.5
5/A54	5	55.98	1422	57.1	1450.3	2.55
5/A55	5	56.97	1447	58.08	1475.2	2.6
5/A56	5	57.95	1472	59.07	1500.4	2.65
5/A57	5	58.98	1498	60.09	1526.3	2.7
5/A58	5	59.96	1523	61.07	1551.2	2.75
5/A60	5	61.97	1574	63.08	1602.2	2.85
5/A62	5	63.98	1625	65.09	1653.3	2.95
5/A64	5	65.98	1676	67.1	1704.3	3.05
5/A65	5	66.97	1701	68.08	1729.2	3.1
5/A66	5	67.95	1726	69.07	1754.4	3.15
5/A68	5	69.96	1777	71.07	1805.2	3.2
5/A70	5	71.97	1828	73.08	1856.2	3.3
5/A71	5	72.95	1853	74.07	1881.4	3.35
5/A74	5	75.98	1930	77.1	1958.3	3.5
5/A75	5	76.97	1955	78.08	1983.2	3.55
5/A77	5	78.98	2006	80.09	2034.3	3.65
5/A78	5	79.96	2031	81.07	2059.2	3.7
5/A80	5	81.97	2082	83.08	2110.2	3.8
5/A81	5	82.95	2107	84.07	2135.4	3.85
5/A83	5	84.96	2158	86.07	2186.2	3.95
5/A85	5	86.97	2209	88.08	2237.2	4.05
5/A90	5	91.97	2336	93.08	2364.2	4.25
5/A92	5	93.98	2387	95.09	2415.3	4.35
5/A96	5	97.95	2488	99.07	2516.4	4.55
5/A100	5	101.97	2590	103.08	2618.2	4.75
5/A105	5	106.97	2717	108.08	2745.2	5
5/A110	5	111.97	2844	113.08	2872.2	5.2
5/A112	5	113.98	2895	115.09	2923.3	5.3
5/A120	5	121.97	3098	123.08	3126.2	5.7
5/A128	5	129.96	3301	131.07	3329.2	6.05
5/A136	5	137.95	3504	139.07	3532.4	6.45
5/A144	5	145.98	3708	147.1	3736.3	6.85
5/A158	5	159.96	4063	161.07	4091.2	7.5
5/A173	5	174.96	4444	176.07	4472.2	8.2
5/A180	5	181.97	4622	183.08	4650.2	8.55
6/A42	6	43.98	1117	45.09	1145.3	2.4
6/A43	6	44.96	1142	46.07	1170.2	2.46
6/A44	6	45.98	1168	47.1	1196.3	2.52
6/A46	6	47.95	1218	49.07	1246.4	2.64
6/A47	6	48.98	1244	50.09	1272.3	2.7

BANDED CLASSIC WRAPPED V-BELTS



A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
6/A48	6	49.96	1269	51.07	1297.2	2.76
6/A49	6	50.98	1295	52.1	1323.3	2.76
6/A51	6	52.95	1345	54.07	1373.4	2.88
6/A53	6	54.96	1396	56.07	1424.2	3
6/A54	6	55.98	1422	57.1	1450.3	3.06
6/A55	6	56.97	1447	58.08	1475.2	3.12
6/A56	6	57.95	1472	59.07	1500.4	3.18
6/A57	6	58.98	1498	60.09	1526.3	3.24
6/A58	6	59.96	1523	61.07	1551.2	3.3
6/A60	6	61.97	1574	63.08	1602.2	3.42
6/A62	6	63.98	1625	65.09	1653.3	3.54
6/A64	6	65.98	1676	67.1	1704.3	3.66
6/A65	6	66.97	1701	68.08	1729.2	3.72
6/A66	6	67.95	1726	69.07	1754.4	3.78
6/A68	6	69.96	1777	71.07	1805.2	3.84
6/A70	6	71.97	1828	73.08	1856.2	3.96
6/A71	6	72.95	1853	74.07	1881.4	4.02
6/A74	6	75.98	1930	77.1	1958.3	4.2
6/A75	6	76.97	1955	78.08	1983.2	4.26
6/A77	6	78.98	2006	80.09	2034.3	4.38
6/A78	6	79.96	2031	81.07	2059.2	4.44
6/A80	6	81.97	2082	83.08	2110.2	4.56
6/A81	6	82.95	2107	84.07	2135.4	4.62
6/A83	6	84.96	2158	86.07	2186.2	4.74
6/A85	6	86.97	2209	88.08	2237.2	4.86
6/A90	6	91.97	2336	93.08	2364.2	5.1
6/A92	6	93.98	2387	95.09	2415.3	5.22
6/A96	6	97.95	2488	99.07	2516.4	5.46
6/A100	6	101.97	2590	103.08	2618.2	5.7
6/A105	6	106.97	2717	108.08	2745.2	6
6/A110	6	111.97	2844	113.08	2872.2	6.24
6/A112	6	113.98	2895	115.09	2923.3	6.36
6/A120	6	121.97	3098	123.08	3126.2	6.84
6/A128	6	129.96	3301	131.07	3329.2	7.26
6/A136	6	137.95	3504	139.07	3532.4	7.74
6/A144	6	145.98	3708	147.1	3736.3	8.22
6/A158	6	159.96	4063	161.07	4091.2	9
6/A173	6	174.96	4444	176.07	4472.2	9.84
6/A180	6	181.97	4622	183.08	4650.2	10.26
7/A42	7	43.98	1117	45.09	1145.3	2.8
7/A43	7	44.96	1142	46.07	1170.2	2.87
7/A44	7	45.98	1168	47.1	1196.3	2.94
7/A46	7	47.95	1218	49.07	1246.4	3.08
7/A47	7	48.98	1244	50.09	1272.3	3.15
7/A48	7	49.96	1269	51.07	1297.2	3.22
7/A49	7	50.98	1295	52.1	1323.3	3.22
7/A51	7	52.95	1345	54.07	1373.4	3.36

A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
7/A53	7	54.96	1396	56.07	1424.2	3.5
7/A54	7	55.98	1422	57.1	1450.3	3.57
7/A55	7	56.97	1447	58.08	1475.2	3.64
7/A56	7	57.95	1472	59.07	1500.4	3.71
7/A57	7	58.98	1498	60.09	1526.3	3.78
7/A58	7	59.96	1523	61.07	1551.2	3.85
7/A60	7	61.97	1574	63.08	1602.2	3.99
7/A62	7	63.98	1625	65.09	1653.3	4.13
7/A64	7	65.98	1676	67.1	1704.3	4.27
7/A65	7	66.97	1701	68.08	1729.2	4.34
7/A66	7	67.95	1726	69.07	1754.4	4.41
7/A68	7	69.96	1777	71.07	1805.2	4.48
7/A70	7	71.97	1828	73.08	1856.2	4.62
7/A71	7	72.95	1853	74.07	1881.4	4.69
7/A74	7	75.98	1930	77.1	1958.3	4.9
7/A75	7	76.97	1955	78.08	1983.2	4.97
7/A77	7	78.98	2006	80.09	2034.3	5.11
7/A78	7	79.96	2031	81.07	2059.2	5.18
7/A80	7	81.97	2082	83.08	2110.2	5.32
7/A81	7	82.95	2107	84.07	2135.4	5.39
7/A83	7	84.96	2158	86.07	2186.2	5.53
7/A85	7	86.97	2209	88.08	2237.2	5.67
7/A90	7	91.97	2336	93.08	2364.2	5.95
7/A92	7	93.98	2387	95.09	2415.3	6.09
7/A96	7	97.95	2488	99.07	2516.4	6.37
7/A100	7	101.97	2590	103.08	2618.2	6.65
7/A105	7	106.97	2717	108.08	2745.2	7
7/A110	7	111.97	2844	113.08	2872.2	7.28
7/A112	7	113.98	2895	115.09	2923.3	7.42
7/A120	7	121.97	3098	123.08	3126.2	7.98
7/A128	7	129.96	3301	131.07	3329.2	8.47
7/A136	7	137.95	3504	139.07	3532.4	9.03
7/A144	7	145.98	3708	147.1	3736.3	9.59
7/A158	7	159.96	4063	161.07	4091.2	10.5
7/A173	7	174.96	4444	176.07	4472.2	11.48
7/A180	7	181.97	4622	183.08	4650.2	11.97
8/A42	8	43.98	1117	45.09	1145.3	3.2
8/A43	8	44.96	1142	46.07	1170.2	3.28
8/A44	8	45.98	1168	47.1	1196.3	3.36
8/A46	8	47.95	1218	49.07	1246.4	3.52
8/A47	8	48.98	1244	50.09	1272.3	3.6
8/A48	8	49.96	1269	51.07	1297.2	3.68
8/A49	8	50.98	1295	52.1	1323.3	3.68
8/A51	8	52.95	1345	54.07	1373.4	3.84
8/A53	8	54.96	1396	56.07	1424.2	4
8/A54	8	55.98	1422	57.1	1450.3	4.08
8/A55	8	56.97	1447	58.08	1475.2	4.16

BANDED CLASSIC WRAPPED V-BELTS



A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
8/A56	8	57.95	1472	59.07	1500.4	4.24
8/A57	8	58.98	1498	60.09	1526.3	4.32
8/A58	8	59.96	1523	61.07	1551.2	4.4
8/A60	8	61.97	1574	63.08	1602.2	4.56
8/A62	8	63.98	1625	65.09	1653.3	4.72
8/A64	8	65.98	1676	67.1	1704.3	4.88
8/A65	8	66.97	1701	68.08	1729.2	4.96
8/A66	8	67.95	1726	69.07	1754.4	5.04
8/A68	8	69.96	1777	71.07	1805.2	5.12
8/A70	8	71.97	1828	73.08	1856.2	5.28
8/A71	8	72.95	1853	74.07	1881.4	5.36
8/A74	8	75.98	1930	77.1	1958.3	5.6
8/A75	8	76.97	1955	78.08	1983.2	5.68
8/A77	8	78.98	2006	80.09	2034.3	5.84
8/A78	8	79.96	2031	81.07	2059.2	5.92
8/A80	8	81.97	2082	83.08	2110.2	6.08
8/A81	8	82.95	2107	84.07	2135.4	6.16
8/A83	8	84.96	2158	86.07	2186.2	6.32
8/A85	8	86.97	2209	88.08	2237.2	6.48
8/A90	8	91.97	2336	93.08	2364.2	6.8
8/A92	8	93.98	2387	95.09	2415.3	6.96
8/A96	8	97.95	2488	99.07	2516.4	7.28
8/A100	8	101.97	2590	103.08	2618.2	7.6
8/A105	8	106.97	2717	108.08	2745.2	8
8/A110	8	111.97	2844	113.08	2872.2	8.32
8/A112	8	113.98	2895	115.09	2923.3	8.48
8/A120	8	121.97	3098	123.08	3126.2	9.12
8/A128	8	129.96	3301	131.07	3329.2	9.68
8/A136	8	137.95	3504	139.07	3532.4	10.32
8/A144	8	145.98	3708	147.1	3736.3	10.96
8/A158	8	159.96	4063	161.07	4091.2	12
8/A173	8	174.96	4444	176.07	4472.2	13.12
8/A180	8	181.97	4622	183.08	4650.2	13.68
9/A42	9	43.98	1117	45.09	1145.3	3.6
9/A43	9	44.96	1142	46.07	1170.2	3.69
9/A44	9	45.98	1168	47.1	1196.3	3.78
9/A46	9	47.95	1218	49.07	1246.4	3.96
9/A47	9	48.98	1244	50.09	1272.3	4.05
9/A48	9	49.96	1269	51.07	1297.2	4.14
9/A49	9	50.98	1295	52.1	1323.3	4.14
9/A51	9	52.95	1345	54.07	1373.4	4.32
9/A53	9	54.96	1396	56.07	1424.2	4.5
9/A54	9	55.98	1422	57.1	1450.3	4.59
9/A55	9	56.97	1447	58.08	1475.2	4.68
9/A56	9	57.95	1472	59.07	1500.4	4.77
9/A57	9	58.98	1498	60.09	1526.3	4.86
9/A58	9	59.96	1523	61.07	1551.2	4.95

A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
9/A60	9	61.97	1574	63.08	1602.2	5.13
9/A62	9	63.98	1625	65.09	1653.3	5.31
9/A64	9	65.98	1676	67.1	1704.3	5.49
9/A65	9	66.97	1701	68.08	1729.2	5.58
9/A66	9	67.95	1726	69.07	1754.4	5.67
9/A68	9	69.96	1777	71.07	1805.2	5.76
9/A70	9	71.97	1828	73.08	1856.2	5.94
9/A71	9	72.95	1853	74.07	1881.4	6.03
9/A74	9	75.98	1930	77.1	1958.3	6.3
9/A75	9	76.97	1955	78.08	1983.2	6.39
9/A77	9	78.98	2006	80.09	2034.3	6.57
9/A78	9	79.96	2031	81.07	2059.2	6.66
9/A80	9	81.97	2082	83.08	2110.2	6.84
9/A81	9	82.95	2107	84.07	2135.4	6.93
9/A83	9	84.96	2158	86.07	2186.2	7.11
9/A85	9	86.97	2209	88.08	2237.2	7.29
9/A90	9	91.97	2336	93.08	2364.2	7.65
9/A92	9	93.98	2387	95.09	2415.3	7.83
9/A96	9	97.95	2488	99.07	2516.4	8.19
9/A100	9	101.97	2590	103.08	2618.2	8.55
9/A105	9	106.97	2717	108.08	2745.2	9
9/A110	9	111.97	2844	113.08	2872.2	9.36
9/A112	9	113.98	2895	115.09	2923.3	9.54
9/A120	9	121.97	3098	123.08	3126.2	10.26
9/A128	9	129.96	3301	131.07	3329.2	10.89
9/A136	9	137.95	3504	139.07	3532.4	11.61
9/A144	9	145.98	3708	147.1	3736.3	12.33
9/A158	9	159.96	4063	161.07	4091.2	13.5
9/A173	9	174.96	4444	176.07	4472.2	14.76
9/A180	9	181.97	4622	183.08	4650.2	15.39
10/A42	10	43.98	1117	45.09	1145.3	4
10/A43	10	44.96	1142	46.07	1170.2	4.1
10/A44	10	45.98	1168	47.1	1196.3	4.2
10/A46	10	47.95	1218	49.07	1246.4	4.4
10/A47	10	48.98	1244	50.09	1272.3	4.5
10/A48	10	49.96	1269	51.07	1297.2	4.6
10/A49	10	50.98	1295	52.1	1323.3	4.6
10/A51	10	52.95	1345	54.07	1373.4	4.8
10/A53	10	54.96	1396	56.07	1424.2	5
10/A54	10	55.98	1422	57.1	1450.3	5.1
10/A55	10	56.97	1447	58.08	1475.2	5.2
10/A56	10	57.95	1472	59.07	1500.4	5.3
10/A57	10	58.98	1498	60.09	1526.3	5.4
10/A58	10	59.96	1523	61.07	1551.2	5.5
10/A60	10	61.97	1574	63.08	1602.2	5.7
10/A62	10	63.98	1625	65.09	1653.3	5.9
10/A64	10	65.98	1676	67.1	1704.3	6.1

BANDED CLASSIC WRAPPED V-BELTS



A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
10/A65	10	66.97	1701	68.08	1729.2	6.2
10/A66	10	67.95	1726	69.07	1754.4	6.3
10/A68	10	69.96	1777	71.07	1805.2	6.4
10/A70	10	71.97	1828	73.08	1856.2	6.6
10/A71	10	72.95	1853	74.07	1881.4	6.7
10/A74	10	75.98	1930	77.1	1958.3	7
10/A75	10	76.97	1955	78.08	1983.2	7.1
10/A77	10	78.98	2006	80.09	2034.3	7.3
10/A78	10	79.96	2031	81.07	2059.2	7.4
10/A80	10	81.97	2082	83.08	2110.2	7.6
10/A81	10	82.95	2107	84.07	2135.4	7.7
10/A83	10	84.96	2158	86.07	2186.2	7.9
10/A85	10	86.97	2209	88.08	2237.2	8.1
10/A44	10	45.98	1168	47.1	1196.3	4.2
10/A46	10	47.95	1218	49.07	1246.4	4.4
10/A47	10	48.98	1244	50.09	1272.3	4.5
10/A48	10	49.96	1269	51.07	1297.2	4.6
10/A49	10	50.98	1295	52.1	1323.3	4.6
10/A51	10	52.95	1345	54.07	1373.4	4.8
10/A53	10	54.96	1396	56.07	1424.2	5
10/A54	10	55.98	1422	57.1	1450.3	5.1
10/A55	10	56.97	1447	58.08	1475.2	5.2
10/A56	10	57.95	1472	59.07	1500.4	5.3
10/A57	10	58.98	1498	60.09	1526.3	5.4
10/A58	10	59.96	1523	61.07	1551.2	5.5
10/A60	10	61.97	1574	63.08	1602.2	5.7
10/A62	10	63.98	1625	65.09	1653.3	5.9
10/A64	10	65.98	1676	67.1	1704.3	6.1
10/A65	10	66.97	1701	68.08	1729.2	6.2
10/A66	10	67.95	1726	69.07	1754.4	6.3
10/A68	10	69.96	1777	71.07	1805.2	6.4
10/A70	10	71.97	1828	73.08	1856.2	6.6
10/A71	10	72.95	1853	74.07	1881.4	6.7
10/A74	10	75.98	1930	77.1	1958.3	7
10/A75	10	76.97	1955	78.08	1983.2	7.1
10/A77	10	78.98	2006	80.09	2034.3	7.3
10/A78	10	79.96	2031	81.07	2059.2	7.4
10/A80	10	81.97	2082	83.08	2110.2	7.6
10/A81	10	82.95	2107	84.07	2135.4	7.7
10/A83	10	84.96	2158	86.07	2186.2	7.9
10/A85	10	86.97	2209	88.08	2237.2	8.1
10/A90	10	91.97	2336	93.08	2364.2	8.5
10/A92	10	93.98	2387	95.09	2415.3	8.7
10/A96	10	97.95	2488	99.07	2516.4	9.1
10/A100	10	101.97	2590	103.08	2618.2	9.5
10/A105	10	106.97	2717	108.08	2745.2	10
10/A110	10	111.97	2844	113.08	2872.2	10.4

A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
10/A112	10	113.98	2895	115.09	2923.3	10.6
10/A120	10	121.97	3098	123.08	3126.2	11.4
10/A128	10	129.96	3301	131.07	3329.2	12.1
10/A136	10	137.95	3504	139.07	3532.4	12.9
10/A144	10	145.98	3708	147.1	3736.3	13.7
10/A158	10	159.96	4063	161.07	4091.2	15
10/A173	10	174.96	4444	176.07	4472.2	16.4
10/A180	10	181.97	4622	183.08	4650.2	17.1
11/A42	11	43.98	1117	45.09	1145.3	4.4
11/A43	11	44.96	1142	46.07	1170.2	4.51
11/A44	11	45.98	1168	47.1	1196.3	4.62
11/A46	11	47.95	1218	49.07	1246.4	4.84
11/A47	11	48.98	1244	50.09	1272.3	4.95
11/A48	11	49.96	1269	51.07	1297.2	5.06
11/A49	11	50.98	1295	52.1	1323.3	5.06
11/A51	11	52.95	1345	54.07	1373.4	5.28
11/A53	11	54.96	1396	56.07	1424.2	5.5
11/A54	11	55.98	1422	57.1	1450.3	5.61
11/A55	11	56.97	1447	58.08	1475.2	5.72
11/A56	11	57.95	1472	59.07	1500.4	5.83
11/A57	11	58.98	1498	60.09	1526.3	5.94
11/A58	11	59.96	1523	61.07	1551.2	6.05
11/A60	11	61.97	1574	63.08	1602.2	6.27
11/A62	11	63.98	1625	65.09	1653.3	6.49
11/A64	11	65.98	1676	67.1	1704.3	6.71
11/A65	11	66.97	1701	68.08	1729.2	6.82
11/A66	11	67.95	1726	69.07	1754.4	6.93
11/A68	11	69.96	1777	71.07	1805.2	7.04
11/A70	11	71.97	1828	73.08	1856.2	7.26
11/A58	11	59.96	1523	61.07	1551.2	6.05
11/A60	11	61.97	1574	63.08	1602.2	6.27
11/A62	11	63.98	1625	65.09	1653.3	6.49
11/A64	11	65.98	1676	67.1	1704.3	6.71
11/A65	11	66.97	1701	68.08	1729.2	6.82
11/A66	11	67.95	1726	69.07	1754.4	6.93
11/A68	11	69.96	1777	71.07	1805.2	7.04
11/A70	11	71.97	1828	73.08	1856.2	7.26
11/A71	11	72.95	1853	74.07	1881.4	7.37
11/A74	11	75.98	1930	77.1	1958.3	7.7
11/A75	11	76.97	1955	78.08	1983.2	7.81
11/A77	11	78.98	2006	80.09	2034.3	8.03
11/A78	11	79.96	2031	81.07	2059.2	8.14
11/A80	11	81.97	2082	83.08	2110.2	8.36
11/A81	11	82.95	2107	84.07	2135.4	8.47
11/A83	11	84.96	2158	86.07	2186.2	8.69
11/A85	11	86.97	2209	88.08	2237.2	8.91
11/A90	11	91.97	2336	93.08	2364.2	9.35

BANDED CLASSIC WRAPPED V-BELTS



A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
11/A92	11	93.98	2387	95.09	2415.3	9.57
11/A96	11	97.95	2488	99.07	2516.4	10.01
11/A100	11	101.97	2590	103.08	2618.2	10.45
11/A105	11	106.97	2717	108.08	2745.2	11
11/A110	11	111.97	2844	113.08	2872.2	11.44
11/A112	11	113.98	2895	115.09	2923.3	11.66
11/A120	11	121.97	3098	123.08	3126.2	12.54
11/A128	11	129.96	3301	131.07	3329.2	13.31
11/A136	11	137.95	3504	139.07	3532.4	14.19
11/A144	11	145.98	3708	147.1	3736.3	15.07
11/A158	11	159.96	4063	161.07	4091.2	16.5
11/A173	11	174.96	4444	176.07	4472.2	18.04
11/A180	11	181.97	4622	183.08	4650.2	18.81
12/A42	12	43.98	1117	45.09	1145.3	4.8
12/A43	12	44.96	1142	46.07	1170.2	4.92
12/A44	12	45.98	1168	47.1	1196.3	5.04
12/A46	12	47.95	1218	49.07	1246.4	5.28
12/A47	12	48.98	1244	50.09	1272.3	5.4
12/A48	12	49.96	1269	51.07	1297.2	5.52
12/A49	12	50.98	1295	52.1	1323.3	5.52
12/A51	12	52.95	1345	54.07	1373.4	5.76
12/A53	12	54.96	1396	56.07	1424.2	6
12/A54	12	55.98	1422	57.1	1450.3	6.12
12/A55	12	56.97	1447	58.08	1475.2	6.24
12/A56	12	57.95	1472	59.07	1500.4	6.36
12/A57	12	58.98	1498	60.09	1526.3	6.48
12/A58	12	59.96	1523	61.07	1551.2	6.6
12/A60	12	61.97	1574	63.08	1602.2	6.84
12/A62	12	63.98	1625	65.09	1653.3	7.08
12/A64	12	65.98	1676	67.1	1704.3	7.32
12/A65	12	66.97	1701	68.08	1729.2	7.44
12/A66	12	67.95	1726	69.07	1754.4	7.56
12/A68	12	69.96	1777	71.07	1805.2	7.68
12/A70	12	71.97	1828	73.08	1856.2	7.92
12/A71	12	72.95	1853	74.07	1881.4	8.04
12/A74	12	75.98	1930	77.1	1958.3	8.4
12/A75	12	76.97	1955	78.08	1983.2	8.52
12/A77	12	78.98	2006	80.09	2034.3	8.76
12/A78	12	79.96	2031	81.07	2059.2	8.88
12/A80	12	81.97	2082	83.08	2110.2	9.12
12/A81	12	82.95	2107	84.07	2135.4	9.24
12/A83	12	84.96	2158	86.07	2186.2	9.48
13/A53	13	54.96	1396	56.07	1424.2	6.5
13/A54	13	55.98	1422	57.1	1450.3	6.63
13/A55	13	56.97	1447	58.08	1475.2	6.76
13/A56	13	57.95	1472	59.07	1500.4	6.89
13/A57	13	58.98	1498	60.09	1526.3	7.02

A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
13/A58	13	59.96	1523	61.07	1551.2	7.15
13/A60	13	61.97	1574	63.08	1602.2	7.41
13/A62	13	63.98	1625	65.09	1653.3	7.67
13/A64	13	65.98	1676	67.1	1704.3	7.93
13/A65	13	66.97	1701	68.08	1729.2	8.06
13/A66	13	67.95	1726	69.07	1754.4	8.19
13/A68	13	69.96	1777	71.07	1805.2	8.32
13/A70	13	71.97	1828	73.08	1856.2	8.58
13/A71	13	72.95	1853	74.07	1881.4	8.71
13/A74	13	75.98	1930	77.1	1958.3	9.1
13/A75	13	76.97	1955	78.08	1983.2	9.23
13/A77	13	78.98	2006	80.09	2034.3	9.49
13/A78	13	79.96	2031	81.07	2059.2	9.62
13/A80	13	81.97	2082	83.08	2110.2	9.88
13/A81	13	82.95	2107	84.07	2135.4	10.01
13/A83	13	84.96	2158	86.07	2186.2	10.27
13/A85	13	86.97	2209	88.08	2237.2	10.53
13/A90	13	91.97	2336	93.08	2364.2	11.05
13/A92	13	93.98	2387	95.09	2415.3	11.31
13/A96	13	97.95	2488	99.07	2516.4	11.83
13/A100	13	101.97	2590	103.08	2618.2	12.35
13/A105	13	106.97	2717	108.08	2745.2	13
13/A110	13	111.97	2844	113.08	2872.2	13.52
13/A112	13	113.98	2895	115.09	2923.3	13.78
13/A120	13	121.97	3098	123.08	3126.2	14.82
13/A128	13	129.96	3301	131.07	3329.2	15.73
13/A136	13	137.95	3504	139.07	3532.4	16.77
13/A144	13	145.98	3708	147.1	3736.3	17.81
13/A158	13	159.96	4063	161.07	4091.2	19.5
13/A173	13	174.96	4444	176.07	4472.2	21.32
13/A180	13	181.97	4622	183.08	4650.2	22.23
14/A42	14	43.98	1117	45.09	1145.3	5.6
14/A43	14	44.96	1142	46.07	1170.2	5.74
14/A44	14	45.98	1168	47.1	1196.3	5.88
14/A46	14	47.95	1218	49.07	1246.4	6.16
14/A47	14	48.98	1244	50.09	1272.3	6.3
14/A48	14	49.96	1269	51.07	1297.2	6.44
14/A49	14	50.98	1295	52.1	1323.3	6.44
14/A51	14	52.95	1345	54.07	1373.4	6.72
14/A53	14	54.96	1396	56.07	1424.2	7
14/A54	14	55.98	1422	57.1	1450.3	7.14
14/A55	14	56.97	1447	58.08	1475.2	7.28
14/A56	14	57.95	1472	59.07	1500.4	7.42
14/A57	14	58.98	1498	60.09	1526.3	7.56
14/A58	14	59.96	1523	61.07	1551.2	7.7
14/A60	14	61.97	1574	63.08	1602.2	7.98
14/A62	14	63.98	1625	65.09	1653.3	8.26

BANDED CLASSIC WRAPPED V-BELTS



A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
14/A64	14	65.98	1676	67.1	1704.3	8.54
14/A65	14	66.97	1701	68.08	1729.2	8.68
14/A66	14	67.95	1726	69.07	1754.4	8.82
14/A68	14	69.96	1777	71.07	1805.2	8.96
14/A70	14	71.97	1828	73.08	1856.2	9.24
14/A71	14	72.95	1853	74.07	1881.4	9.38
14/A74	14	75.98	1930	77.1	1958.3	9.8
14/A75	14	76.97	1955	78.08	1983.2	9.94
14/A77	14	78.98	2006	80.09	2034.3	10.22
14/A78	14	79.96	2031	81.07	2059.2	10.36
14/A80	14	81.97	2082	83.08	2110.2	10.64
14/A81	14	82.95	2107	84.07	2135.4	10.78
14/A83	14	84.96	2158	86.07	2186.2	11.06
14/A85	14	86.97	2209	88.08	2237.2	11.34
14/A90	14	91.97	2336	93.08	2364.2	11.9
14/A92	14	93.98	2387	95.09	2415.3	12.18
14/A96	14	97.95	2488	99.07	2516.4	12.74
14/A100	14	101.97	2590	103.08	2618.2	13.3
14/A105	14	106.97	2717	108.08	2745.2	14
14/A110	14	111.97	2844	113.08	2872.2	14.56
14/A112	14	113.98	2895	115.09	2923.3	14.84
14/A120	14	121.97	3098	123.08	3126.2	15.96
14/A128	14	129.96	3301	131.07	3329.2	16.94
14/A136	14	137.95	3504	139.07	3532.4	18.06
14/A144	14	145.98	3708	147.1	3736.3	19.18
14/A158	14	159.96	4063	161.07	4091.2	21
14/A173	14	174.96	4444	176.07	4472.2	22.96
14/A180	14	181.97	4622	183.08	4650.2	23.94
15/A42	15	43.98	1117	45.09	1145.3	6
15/A43	15	44.96	1142	46.07	1170.2	6.15
15/A44	15	45.98	1168	47.1	1196.3	6.3
15/A46	15	47.95	1218	49.07	1246.4	6.6
15/A47	15	48.98	1244	50.09	1272.3	6.75
15/A48	15	49.96	1269	51.07	1297.2	6.9
15/A49	15	50.98	1295	52.1	1323.3	6.9
15/A51	15	52.95	1345	54.07	1373.4	7.2
15/A53	15	54.96	1396	56.07	1424.2	7.5
15/A54	15	55.98	1422	57.1	1450.3	7.65
15/A55	15	56.97	1447	58.08	1475.2	7.8
15/A56	15	57.95	1472	59.07	1500.4	7.95
15/A57	15	58.98	1498	60.09	1526.3	8.1
15/A58	15	59.96	1523	61.07	1551.2	8.25
15/A60	15	61.97	1574	63.08	1602.2	8.55
15/A62	15	63.98	1625	65.09	1653.3	8.85
15/A64	15	65.98	1676	67.1	1704.3	9.15
15/A65	15	66.97	1701	68.08	1729.2	9.3
15/A66	15	67.95	1726	69.07	1754.4	9.45

A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
15/A68	15	69.96	1777	71.07	1805.2	9.6
15/A70	15	71.97	1828	73.08	1856.2	9.9
15/A71	15	72.95	1853	74.07	1881.4	10.05
15/A74	15	75.98	1930	77.1	1958.3	10.5
15/A75	15	76.97	1955	78.08	1983.2	10.65
15/A77	15	78.98	2006	80.09	2034.3	10.95
15/A78	15	79.96	2031	81.07	2059.2	11.1
15/A80	15	81.97	2082	83.08	2110.2	11.4
15/A81	15	82.95	2107	84.07	2135.4	11.55
15/A83	15	84.96	2158	86.07	2186.2	11.85
15/A85	15	86.97	2209	88.08	2237.2	12.15
15/A90	15	91.97	2336	93.08	2364.2	12.75
15/A92	15	93.98	2387	95.09	2415.3	13.05
15/A96	15	97.95	2488	99.07	2516.4	13.65
15/A100	15	101.97	2590	103.08	2618.2	14.25
15/A105	15	106.97	2717	108.08	2745.2	15
15/A110	15	111.97	2844	113.08	2872.2	15.6
15/A112	15	113.98	2895	115.09	2923.3	15.9
15/A120	15	121.97	3098	123.08	3126.2	17.1
15/A128	15	129.96	3301	131.07	3329.2	18.15
15/A136	15	137.95	3504	139.07	3532.4	19.35
15/A144	15	145.98	3708	147.1	3736.3	20.55
15/A158	15	159.96	4063	161.07	4091.2	22.5
15/A173	15	174.96	4444	176.07	4472.2	24.6
15/A180	15	181.97	4622	183.08	4650.2	25.65
16/A42	16	43.98	1117	45.09	1145.3	6.4
16/A43	16	44.96	1142	46.07	1170.2	6.56
16/A44	16	45.98	1168	47.1	1196.3	6.72
16/A46	16	47.95	1218	49.07	1246.4	7.04
16/A47	16	48.98	1244	50.09	1272.3	7.2
16/A48	16	49.96	1269	51.07	1297.2	7.36
16/A49	16	50.98	1295	52.1	1323.3	7.36
16/A51	16	52.95	1345	54.07	1373.4	7.68
16/A53	16	54.96	1396	56.07	1424.2	8
16/A54	16	55.98	1422	57.1	1450.3	8.16
16/A55	16	56.97	1447	58.08	1475.2	8.32
16/A56	16	57.95	1472	59.07	1500.4	8.48
16/A57	16	58.98	1498	60.09	1526.3	8.64
16/A58	16	59.96	1523	61.07	1551.2	8.8
16/A60	16	61.97	1574	63.08	1602.2	9.12
16/A62	16	63.98	1625	65.09	1653.3	9.44
16/A64	16	65.98	1676	67.1	1704.3	9.76
16/A65	16	66.97	1701	68.08	1729.2	9.92
16/A66	16	67.95	1726	69.07	1754.4	10.08
16/A68	16	69.96	1777	71.07	1805.2	10.24
16/A70	16	71.97	1828	73.08	1856.2	10.56
16/A71	16	72.95	1853	74.07	1881.4	10.72

BANDED CLASSIC WRAPPED V-BELTS



A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
16/A74	16	75.98	1930	77.1	1958.3	11.2
16/A75	16	76.97	1955	78.08	1983.2	11.36
16/A77	16	78.98	2006	80.09	2034.3	11.68
16/A78	16	79.96	2031	81.07	2059.2	11.84
16/A80	16	81.97	2082	83.08	2110.2	12.16
16/A81	16	82.95	2107	84.07	2135.4	12.32
16/A83	16	84.96	2158	86.07	2186.2	12.64
16/A85	16	86.97	2209	88.08	2237.2	12.96
16/A90	16	91.97	2336	93.08	2364.2	13.6
16/A92	16	93.98	2387	95.09	2415.3	13.92
16/A96	16	97.95	2488	99.07	2516.4	14.56
16/A100	16	101.97	2590	103.08	2618.2	15.2
16/A105	16	106.97	2717	108.08	2745.2	16
16/A110	16	111.97	2844	113.08	2872.2	16.64
16/A112	16	113.98	2895	115.09	2923.3	16.96
16/A120	16	121.97	3098	123.08	3126.2	18.24
16/A128	16	129.96	3301	131.07	3329.2	19.36
16/A136	16	137.95	3504	139.07	3532.4	20.64
16/A144	16	145.98	3708	147.1	3736.3	21.92
16/A158	16	159.96	4063	161.07	4091.2	24
16/A173	16	174.96	4444	176.07	4472.2	26.24
16/A180	16	181.97	4622	183.08	4650.2	27.36
17/A42	17	43.98	1117	45.09	1145.3	6.8
17/A43	17	44.96	1142	46.07	1170.2	6.97
17/A44	17	45.98	1168	47.1	1196.3	7.14
17/A46	17	47.95	1218	49.07	1246.4	7.48
17/A47	17	48.98	1244	50.09	1272.3	7.65
17/A48	17	49.96	1269	51.07	1297.2	7.82
17/A49	17	50.98	1295	52.1	1323.3	7.82
17/A51	17	52.95	1345	54.07	1373.4	8.16
17/A53	17	54.96	1396	56.07	1424.2	8.5
17/A54	17	55.98	1422	57.1	1450.3	8.67
17/A55	17	56.97	1447	58.08	1475.2	8.84
17/A56	17	57.95	1472	59.07	1500.4	9.01
17/A57	17	58.98	1498	60.09	1526.3	9.18
17/A58	17	59.96	1523	61.07	1551.2	9.35
17/A60	17	61.97	1574	63.08	1602.2	9.69
17/A62	17	63.98	1625	65.09	1653.3	10.03
17/A64	17	65.98	1676	67.1	1704.3	10.37
17/A65	17	66.97	1701	68.08	1729.2	10.54
17/A66	17	67.95	1726	69.07	1754.4	10.71
17/A68	17	69.96	1777	71.07	1805.2	10.88
17/A70	17	71.97	1828	73.08	1856.2	11.22
17/A71	17	72.95	1853	74.07	1881.4	11.39
17/A74	17	75.98	1930	77.1	1958.3	11.9
17/A75	17	76.97	1955	78.08	1983.2	12.07
17/A77	17	78.98	2006	80.09	2034.3	12.41

A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
17/A78	17	79.96	2031	81.07	2059.2	12.58
17/A80	17	81.97	2082	83.08	2110.2	12.92
17/A81	17	82.95	2107	84.07	2135.4	13.09
17/A83	17	84.96	2158	86.07	2186.2	13.43
17/A85	17	86.97	2209	88.08	2237.2	13.77
17/A90	17	91.97	2336	93.08	2364.2	14.45
17/A92	17	93.98	2387	95.09	2415.3	14.79
17/A96	17	97.95	2488	99.07	2516.4	15.47
17/A100	17	101.97	2590	103.08	2618.2	16.15
17/A105	17	106.97	2717	108.08	2745.2	17
17/A110	17	111.97	2844	113.08	2872.2	17.68
17/A112	17	113.98	2895	115.09	2923.3	18.02
17/A120	17	121.97	3098	123.08	3126.2	19.38
17/A128	17	129.96	3301	131.07	3329.2	20.57
17/A136	17	137.95	3504	139.07	3532.4	21.93
17/A144	17	145.98	3708	147.1	3736.3	23.29
17/A158	17	159.96	4063	161.07	4091.2	25.5
17/A173	17	174.96	4444	176.07	4472.2	27.88
17/A180	17	181.97	4622	183.08	4650.2	29.07
18/A42	18	43.98	1117	45.09	1145.3	7.2
18/A43	18	44.96	1142	46.07	1170.2	7.38
18/A44	18	45.98	1168	47.1	1196.3	7.56
18/A46	18	47.95	1218	49.07	1246.4	7.92
18/A47	18	48.98	1244	50.09	1272.3	8.1
18/A48	18	49.96	1269	51.07	1297.2	8.28
18/A49	18	50.98	1295	52.1	1323.3	8.28
18/A51	18	52.95	1345	54.07	1373.4	8.64
18/A53	18	54.96	1396	56.07	1424.2	9
18/A54	18	55.98	1422	57.1	1450.3	9.18
18/A55	18	56.97	1447	58.08	1475.2	9.36
18/A56	18	57.95	1472	59.07	1500.4	9.54
18/A57	18	58.98	1498	60.09	1526.3	9.72
18/A58	18	59.96	1523	61.07	1551.2	9.9
18/A60	18	61.97	1574	63.08	1602.2	10.26
18/A62	18	63.98	1625	65.09	1653.3	10.62
18/A64	18	65.98	1676	67.1	1704.3	10.98
18/A65	18	66.97	1701	68.08	1729.2	11.16
18/A66	18	67.95	1726	69.07	1754.4	11.34
18/A68	18	69.96	1777	71.07	1805.2	11.52
18/A70	18	71.97	1828	73.08	1856.2	11.88
18/A71	18	72.95	1853	74.07	1881.4	12.06
18/A74	18	75.98	1930	77.1	1958.3	12.6
18/A75	18	76.97	1955	78.08	1983.2	12.78
18/A77	18	78.98	2006	80.09	2034.3	13.14
18/A78	18	79.96	2031	81.07	2059.2	13.32
18/A80	18	81.97	2082	83.08	2110.2	13.68
18/A81	18	82.95	2107	84.07	2135.4	13.86

BANDED CLASSIC WRAPPED V-BELTS



A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
18/A83	18	84.96	2158	86.07	2186.2	14.22
18/A85	18	86.97	2209	88.08	2237.2	14.58
18/A90	18	91.97	2336	93.08	2364.2	15.3
18/A92	18	93.98	2387	95.09	2415.3	15.66
18/A96	18	97.95	2488	99.07	2516.4	16.38
18/A100	18	101.97	2590	103.08	2618.2	17.1
18/A105	18	106.97	2717	108.08	2745.2	18
18/A110	18	111.97	2844	113.08	2872.2	18.72
18/A112	18	113.98	2895	115.09	2923.3	19.08
18/A120	18	121.97	3098	123.08	3126.2	20.52
18/A128	18	129.96	3301	131.07	3329.2	21.78
18/A136	18	137.95	3504	139.07	3532.4	23.22
18/A144	18	145.98	3708	147.1	3736.3	24.66
18/A158	18	159.96	4063	161.07	4091.2	27
18/A173	18	174.96	4444	176.07	4472.2	29.52
18/A180	18	181.97	4622	183.08	4650.2	30.78
19/A42	19	43.98	1117	45.09	1145.3	7.6
19/A43	19	44.96	1142	46.07	1170.2	7.79
19/A44	19	45.98	1168	47.1	1196.3	7.98
19/A46	19	47.95	1218	49.07	1246.4	8.36
19/A47	19	48.98	1244	50.09	1272.3	8.55
19/A48	19	49.96	1269	51.07	1297.2	8.74
19/A49	19	50.98	1295	52.1	1323.3	8.74
19/A51	19	52.95	1345	54.07	1373.4	9.12
19/A53	19	54.96	1396	56.07	1424.2	9.5
19/A54	19	55.98	1422	57.1	1450.3	9.69
19/A55	19	56.97	1447	58.08	1475.2	9.88
19/A56	19	57.95	1472	59.07	1500.4	10.07
19/A57	19	58.98	1498	60.09	1526.3	10.26
19/A48	19	49.96	1269	51.07	1297.2	8.74
19/A49	19	50.98	1295	52.1	1323.3	8.74
19/A51	19	52.95	1345	54.07	1373.4	9.12
19/A53	19	54.96	1396	56.07	1424.2	9.5
19/A54	19	55.98	1422	57.1	1450.3	9.69
19/A55	19	56.97	1447	58.08	1475.2	9.88
19/A56	19	57.95	1472	59.07	1500.4	10.07
19/A57	19	58.98	1498	60.09	1526.3	10.26
19/A58	19	59.96	1523	61.07	1551.2	10.45
19/A60	19	61.97	1574	63.08	1602.2	10.83
19/A62	19	63.98	1625	65.09	1653.3	11.21
19/A64	19	65.98	1676	67.1	1704.3	11.59
19/A65	19	66.97	1701	68.08	1729.2	11.78
19/A66	19	67.95	1726	69.07	1754.4	11.97
19/A68	19	69.96	1777	71.07	1805.2	12.16
19/A70	19	71.97	1828	73.08	1856.2	12.54
19/A71	19	72.95	1853	74.07	1881.4	12.73
19/A74	19	75.98	1930	77.1	1958.3	13.3

A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
19/A75	19	76.97	1955	78.08	1983.2	13.49
19/A77	19	78.98	2006	80.09	2034.3	13.87
19/A78	19	79.96	2031	81.07	2059.2	14.06
19/A80	19	81.97	2082	83.08	2110.2	14.44
19/A81	19	82.95	2107	84.07	2135.4	14.63
19/A83	19	84.96	2158	86.07	2186.2	15.01
19/A85	19	86.97	2209	88.08	2237.2	15.39
19/A90	19	91.97	2336	93.08	2364.2	16.15
19/A92	19	93.98	2387	95.09	2415.3	16.53
19/A96	19	97.95	2488	99.07	2516.4	17.29
19/A100	19	101.97	2590	103.08	2618.2	18.05
19/A105	19	106.97	2717	108.08	2745.2	19
19/A110	19	111.97	2844	113.08	2872.2	19.76
19/A112	19	113.98	2895	115.09	2923.3	20.14
19/A120	19	121.97	3098	123.08	3126.2	21.66
19/A128	19	129.96	3301	131.07	3329.2	22.99
19/A136	19	137.95	3504	139.07	3532.4	24.51
19/A144	19	145.98	3708	147.1	3736.3	26.03
19/A158	19	159.96	4063	161.07	4091.2	28.5
19/A173	19	174.96	4444	176.07	4472.2	31.16
19/A180	19	181.97	4622	183.08	4650.2	32.49
20/A42	20	43.98	1117	45.09	1145.3	8
20/A43	20	44.96	1142	46.07	1170.2	8.2
20/A44	20	45.98	1168	47.1	1196.3	8.4
20/A46	20	47.95	1218	49.07	1246.4	8.8
20/A47	20	48.98	1244	50.09	1272.3	9
20/A48	20	49.96	1269	51.07	1297.2	9.2
20/A49	20	50.98	1295	52.1	1323.3	9.2
20/A51	20	52.95	1345	54.07	1373.4	9.6
20/A53	20	54.96	1396	56.07	1424.2	10
20/A54	20	55.98	1422	57.1	1450.3	10.2
20/A55	20	56.97	1447	58.08	1475.2	10.4
20/A56	20	57.95	1472	59.07	1500.4	10.6
20/A57	20	58.98	1498	60.09	1526.3	10.8
20/A58	20	59.96	1523	61.07	1551.2	11
20/A60	20	61.97	1574	63.08	1602.2	11.4
20/A62	20	63.98	1625	65.09	1653.3	11.8
20/A64	20	65.98	1676	67.1	1704.3	12.2
20/A65	20	66.97	1701	68.08	1729.2	12.4
20/A66	20	67.95	1726	69.07	1754.4	12.6
20/A68	20	69.96	1777	71.07	1805.2	12.8
20/A70	20	71.97	1828	73.08	1856.2	13.2
20/A71	20	72.95	1853	74.07	1881.4	13.4
20/A74	20	75.98	1930	77.1	1958.3	14
20/A75	20	76.97	1955	78.08	1983.2	14.2
20/A77	20	78.98	2006	80.09	2034.3	14.6
20/A78	20	79.96	2031	81.07	2059.2	14.8


BANDED CLASSIC WRAPPED V-BELTS

A continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
20/A80	20	81.97	2082	83.08	2110.2	15.2
20/A81	20	82.95	2107	84.07	2135.4	15.4
20/A83	20	84.96	2158	86.07	2186.2	15.8
20/A85	20	86.97	2209	88.08	2237.2	16.2
20/A90	20	91.97	2336	93.08	2364.2	17
20/A92	20	93.98	2387	95.09	2415.3	17.4
20/A96	20	97.95	2488	99.07	2516.4	18.2
20/A100	20	101.97	2590	103.08	2618.2	19
20/A105	20	106.97	2717	108.08	2745.2	20
20/A110	20	111.97	2844	113.08	2872.2	20.8
20/A112	20	113.98	2895	115.09	2923.3	21.2
20/A120	20	121.97	3098	123.08	3126.2	22.8
20/A128	20	129.96	3301	131.07	3329.2	24.2
20/A136	20	137.95	3504	139.07	3532.4	25.8
20/A144	20	145.98	3708	147.1	3736.3	27.4
20/A158	20	159.96	4063	161.07	4091.2	30
20/A173	20	174.96	4444	176.07	4472.2	32.8
20/A180	20	181.97	4622	183.08	4650.2	34.2

BELT PART NUMBER NOMENCLATURE

Belt No: **2/B100**
2/ - Number of Ribs: 2
B - Profile
100 - Inside Circumference (In)



B

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/B35	2	37.72	958	38.95	989.3	1.04
2/B38	2	40.71	1034	41.95	1065.5	1.12
2/B40	2	42.72	1085	43.95	1116.3	1.18
2/B41	2	43.7	1110	44.94	1141.5	1.22
2/B42	2	44.72	1136	45.96	1167.4	1.24
2/B43	2	45.71	1161	46.95	1192.5	1.28
2/B44	2	46.73	1187	47.97	1218.4	1.3
2/B44	2	46.73	1187	47.97	1218.4	1.3
2/B46	2	48.7	1237	49.94	1268.5	1.36
2/B47	2	49.72	1263	50.96	1294.4	1.38
2/B48	2	50.71	1288	51.95	1319.5	1.42
2/B50	2	52.72	1339	53.95	1370.3	1.48
2/B51	2	53.7	1364	54.94	1395.5	1.5
2/B52	2	54.72	1390	55.96	1421.4	1.54
2/B53	2	55.71	1415	56.95	1446.5	1.56
2/B54	2	56.73	1441	57.97	1472.4	1.6
2/B55	2	57.72	1466	58.95	1497.3	1.62

B

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/B56	2	58.7	1491	59.94	1522.5	1.66
2/B57	2	59.72	1517	60.96	1548.4	1.68
2/B58	2	60.71	1542	61.95	1573.5	1.72
2/B59	2	61.73	1568	62.97	1599.4	1.74
2/B60	2	62.72	1593	63.95	1624.3	1.78
2/B61	2	63.7	1618	64.94	1649.5	1.8
2/B62	2	64.72	1644	65.96	1675.4	1.84
2/B63	2	65.71	1669	66.95	1700.5	1.86
2/B64	2	66.73	1695	67.97	1726.4	1.9
2/B65	2	67.72	1720	68.95	1751.3	1.92
2/B66	2	68.7	1745	69.94	1776.5	1.94
2/B67	2	69.72	1771	70.96	1802.4	1.98
2/B68	2	70.71	1796	71.95	1827.5	2
2/B70	2	72.72	1847	73.95	1878.3	2.06
2/B71	2	73.7	1872	74.94	1903.5	2.1
2/B72	2	74.72	1898	75.96	1929.4	2.12
2/B73	2	75.71	1923	76.95	1954.5	2.16
2/B74	2	76.73	1949	77.97	1980.4	2.18
2/B75	2	77.72	1974	78.95	2005.3	2.22
2/B77	2	79.72	2025	80.96	2056.4	2.28
2/B78	2	80.71	2050	81.95	2081.5	2.3
2/B79	2	81.73	2076	82.97	2107.4	2.34
2/B80	2	82.72	2101	83.95	2132.3	2.36
2/B81	2	83.7	2126	84.94	2157.5	2.4
2/B82	2	84.72	2152	85.96	2183.4	2.42
2/B83	2	85.71	2177	86.95	2208.5	2.46
2/B84	2	86.73	2203	87.97	2234.4	2.48
2/B85	2	87.72	2228	88.95	2259.3	2.52
2/B86	2	88.7	2253	89.94	2284.5	2.54
2/B87	2	89.72	2279	90.96	2310.4	2.58
2/B88	2	90.71	2304	91.95	2335.5	2.6
2/B90	2	92.72	2355	93.95	2386.3	2.66
2/B91	2	93.7	2380	94.94	2411.5	2.68
2/B92	2	94.72	2406	95.96	2437.4	2.72
2/B93	2	95.71	2431	96.95	2462.5	2.74
2/B95	2	97.72	2482	98.95	2513.3	2.8
2/B96	2	98.7	2507	99.94	2538.5	2.84
2/B97	2	99.72	2533	100.96	2564.4	2.86
2/B99	2	101.73	2584	102.97	2615.4	2.92
2/B100	2	102.72	2609	103.95	2640.3	2.96
2/B103	2	105.71	2685	106.95	2716.5	3.04
2/B104	2	106.73	2711	107.97	2742.4	3.08
2/B105	2	107.72	2736	108.95	2767.3	3.1
2/B108	2	110.71	2812	111.95	2843.5	3.2
2/B109	2	111.73	2838	112.97	2869.4	3.22
2/B110	2	112.72	2863	113.95	2894.3	3.24
2/B112	2	114.72	2914	115.96	2945.4	3.3

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/B113	2	115.71	2939	116.95	2970.5	3.34
2/B114	2	116.73	2965	117.97	2996.4	3.36
2/B115	2	117.72	2990	118.95	3021.3	3.4
2/B116	2	118.7	3015	119.94	3046.5	3.42
2/B118	2	120.71	3066	121.95	3097.5	3.48
2/B120	2	122.72	3117	123.95	3148.3	3.54
2/B124	2	126.73	3219	127.97	3250.4	3.66
2/B128	2	130.71	3320	131.95	3351.5	3.78
2/B130	2	132.72	3371	133.95	3402.3	3.84
2/B133	2	135.71	3447	136.95	3478.5	3.92
2/B136	2	138.7	3523	139.94	3554.5	4.02
2/B138	2	140.71	3574	141.95	3605.5	4.08
2/B139	2	141.73	3600	142.97	3631.4	4.1
2/B140	2	142.72	3625	143.95	3656.3	4.14
2/B141	2	143.7	3650	144.94	3681.5	4.16
2/B144	2	146.73	3727	147.97	3758.4	4.26
2/B148	2	150.71	3828	151.95	3859.5	4.38
2/B150	2	152.72	3879	153.95	3910.3	4.44
2/B154	2	156.73	3981	157.97	4012.4	4.54
2/B158	2	160.71	4082	161.95	4113.5	4.66
2/B160	2	162.72	4133	163.95	4164.3	4.72
2/B162	2	164.72	4184	165.96	4215.4	4.78
2/B168	2	170.71	4336	171.95	4367.5	4.96
2/B173	2	175.71	4463	176.95	4494.5	5.12
2/B180	2	182.72	4641	183.95	4672.3	5.32
2/B185	2	187.72	4768	188.95	4799.3	5.46
2/B190	2	192.72	4895	193.95	4926.3	5.62
2/B195	2	197.72	5022	198.95	5053.3	5.76
2/B210	2	212.72	5403	213.95	5434.3	6.2
2/B218	2	220.71	5606	221.95	5637.5	6.44
2/B225	2	227.72	5784	228.95	5815.3	6.64
2/B240	2	242.72	6165	243.95	6196.3	7.1
2/B255	2	257.72	6546	258.95	6577.3	7.54
2/B270	2	272.72	6927	273.95	6958.3	7.98
2/B300	2	302.72	7689	303.95	7720.3	8.86
2/B315	2	317.72	8070	318.95	8101.3	9.3
3/B35	3	37.72	958	38.95	989.3	1.56
3/B38	3	40.71	1034	41.95	1065.5	1.68
3/B40	3	42.72	1085	43.95	1116.3	1.77
3/B41	3	43.7	1110	44.94	1141.5	1.83
3/B42	3	44.72	1136	45.96	1167.4	1.86
3/B43	3	45.71	1161	46.95	1192.5	1.92
3/B44	3	46.73	1187	47.97	1218.4	1.95
3/B46	3	48.7	1237	49.94	1268.5	2.04
3/B47	3	49.72	1263	50.96	1294.4	2.07
3/B48	3	50.71	1288	51.95	1319.5	2.13
3/B50	3	52.72	1339	53.95	1370.3	2.22

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3/B51	3	53.7	1364	54.94	1395.5	2.25
3/B52	3	54.72	1390	55.96	1421.4	2.31
3/B53	3	55.71	1415	56.95	1446.5	2.34
3/B59	3	61.73	1568	62.97	1599.4	2.61
3/B60	3	62.72	1593	63.95	1624.3	2.67
3/B61	3	63.7	1618	64.94	1649.5	2.7
3/B62	3	64.72	1644	65.96	1675.4	2.76
3/B63	3	65.71	1669	66.95	1700.5	2.79
3/B64	3	66.73	1695	67.97	1726.4	2.85
3/B65	3	67.72	1720	68.95	1751.3	2.88
3/B66	3	68.7	1745	69.94	1776.5	2.91
3/B67	3	69.72	1771	70.96	1802.4	2.97
3/B68	3	70.71	1796	71.95	1827.5	3
3/B70	3	72.72	1847	73.95	1878.3	3.09
3/B71	3	73.7	1872	74.94	1903.5	3.15
3/B72	3	74.72	1898	75.96	1929.4	3.18
3/B73	3	75.71	1923	76.95	1954.5	3.24
3/B74	3	76.73	1949	77.97	1980.4	3.27
3/B75	3	77.72	1974	78.95	2005.3	3.33
3/B77	3	79.72	2025	80.96	2056.4	3.42
3/B78	3	80.71	2050	81.95	2081.5	3.45
3/B79	3	81.73	2076	82.97	2107.4	3.51
3/B80	3	82.72	2101	83.95	2132.3	3.54
3/B81	3	83.7	2126	84.94	2157.5	3.6
3/B82	3	84.72	2152	85.96	2183.4	3.63
3/B83	3	85.71	2177	86.95	2208.5	3.69
3/B84	3	86.73	2203	87.97	2234.4	3.72
3/B85	3	87.72	2228	88.95	2259.3	3.78
3/B86	3	88.7	2253	89.94	2284.5	3.81
3/B87	3	89.72	2279	90.96	2310.4	3.87
3/B88	3	90.71	2304	91.95	2335.5	3.9
3/B90	3	92.72	2355	93.95	2386.3	3.99
3/B91	3	93.7	2380	94.94	2411	4.02
3/B92	3	94.72	2406	95.96	2437.4	4.08
3/B93	3	95.71	2431	96.95	2462.5	4.11
3/B95	3	97.72	2482	98.95	2513.3	4.2
3/B96	3	98.7	2507	99.94	2538.5	4.26
3/B97	3	99.72	2533	100.96	2564.4	4.29
3/B99	3	101.73	2584	102.97	2615.4	4.38
3/B100	3	102.72	2609	103.95	2640.3	4.44
3/B103	3	105.71	2685	106.95	2716.5	4.56
3/B104	3	106.73	2711	107.97	2742.4	4.62
3/B105	3	107.72	2736	108.95	2767.3	4.65
3/B108	3	110.71	2812	111.95	2843.5	4.8
3/B109	3	111.73	2838	112.97	2869.4	4.83
3/B110	3	112.72	2863	113.95	2894.3	4.86
3/B112	3	114.72	2914	115.96	2945.4	4.95

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
3/B113	3	115.71	2939	116.95	2970.5	5.01
3/B114	3	116.73	2965	117.97	2996.4	5.04
3/B115	3	117.72	2990	118.95	3021.3	5.1
3/B116	3	118.7	3015	119.94	3046.5	5.13
3/B118	3	120.71	3066	121.95	3097.5	5.22
3/B120	3	122.72	3117	123.95	3148.3	5.31
3/B124	3	126.73	3219	127.97	3250.4	5.49
3/B128	3	130.71	3320	131.95	3351.5	5.67
3/B130	3	132.72	3371	133.95	3402.3	5.76
3/B133	3	135.71	3447	136.95	3478.5	5.88
3/B136	3	138.7	3523	139.94	3554.5	6.03
3/B138	3	140.71	3574	141.95	3605.5	6.12
3/B139	3	141.73	3600	142.97	3631.4	6.15
3/B140	3	142.72	3625	143.95	3656.3	6.21
3/B141	3	143.7	3650	144.94	3681.5	6.24
3/B144	3	146.73	3727	147.97	3758.4	6.39
3/B148	3	150.71	3828	151.95	3859.5	6.57
3/B150	3	152.72	3879	153.95	3910.3	6.66
3/B154	3	156.73	3981	157.97	4012.4	6.81
3/B158	3	160.71	4082	161.95	4113.5	6.99
3/B160	3	162.72	4133	163.95	4164.3	7.08
3/B162	3	164.72	4184	165.96	4215.4	7.17
3/B168	3	170.71	4336	171.95	4367.5	7.44
3/B173	3	175.71	4463	176.95	4494.5	7.68
3/B139	3	141.73	3600	142.97	3631.4	6.15
3/B140	3	142.72	3625	143.95	3656.3	6.21
3/B141	3	143.7	3650	144.94	3681.5	6.24
3/B144	3	146.73	3727	147.97	3758.4	6.39
3/B148	3	150.71	3828	151.95	3859.5	6.57
3/B150	3	152.72	3879	153.95	3910.3	6.66
3/B154	3	156.73	3981	157.97	4012.4	6.81
3/B158	3	160.71	4082	161.95	4113.5	6.99
3/B160	3	162.72	4133	163.95	4164.3	7.08
3/B162	3	164.72	4184	165.96	4215.4	7.17
3/B168	3	170.71	4336	171.95	4367.5	7.44
3/B173	3	175.71	4463	176.95	4494.5	7.68
3/B180	3	182.72	4641	183.95	4672.3	7.98
3/B185	3	187.72	4768	188.95	4799.3	8.19
3/B190	3	192.72	4895	193.95	4926.3	8.43
3/B195	3	197.72	5022	198.95	5053.3	8.64
3/B210	3	212.72	5403	213.95	5434.3	9.3
3/B218	3	220.71	5606	221.95	5637.5	9.66
3/B225	3	227.72	5784	228.95	5815.3	9.96
3/B240	3	242.72	6165	243.95	6196.3	10.65
3/B255	3	257.72	6546	258.95	6577.3	11.31
3/B270	3	272.72	6927	273.95	6958.3	11.97
3/B300	3	302.72	7689	303.95	7720.3	13.29

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
3/B315	3	317.72	8070	318.95	8101.3	13.95
3/B210	3	212.72	5403	213.95	5434.3	9.3
3/B218	3	220.71	5606	221.95	5637.5	9.66
3/B225	3	227.72	5784	228.95	5815.3	9.96
3/B240	3	242.72	6165	243.95	6196.3	10.65
3/B255	3	257.72	6546	258.95	6577.3	11.31
3/B270	3	272.72	6927	273.95	6958.3	11.97
3/B300	3	302.72	7689	303.95	7720.3	13.29
3/B315	3	317.72	8070	318.95	8101.3	13.95
4/B35	4	37.72	958	38.95	989.3	2.08
4/B38	4	40.71	1034	41.95	1065.5	2.24
4/B40	4	42.72	1085	43.95	1116.3	2.36
4/B41	4	43.7	1110	44.94	1141.5	2.44
4/B42	4	44.72	1136	45.96	1167.4	2.48
4/B43	4	45.71	1161	46.95	1192.5	2.56
4/B44	4	46.73	1187	47.97	1218.4	2.6
4/B46	4	48.7	1237	49.94	1268.5	2.72
4/B47	4	49.72	1263	50.96	1294.4	2.76
4/B48	4	50.71	1288	51.95	1319.5	2.84
4/B50	4	52.72	1339	53.95	1370.3	2.96
4/B51	4	53.7	1364	54.94	1395.5	3
4/B52	4	54.72	1390	55.96	1421.4	3.08
4/B53	4	55.71	1415	56.95	1446.5	3.12
4/B54	4	56.73	1441	57.97	1472.4	3.2
4/B55	4	57.72	1466	58.95	1497.3	3.24
4/B56	4	58.7	1491	59.94	1522.5	3.32
4/B57	4	59.72	1517	60.96	1548.4	3.36
4/B58	4	60.71	1542	61.95	1573.5	3.44
4/B59	4	61.73	1568	62.97	1599.4	3.48
4/B60	4	62.72	1593	63.95	1624.3	3.56
4/B61	4	63.7	1618	64.94	1649.5	3.6
4/B62	4	64.72	1644	65.96	1675.4	3.68
4/B63	4	65.71	1669	66.95	1700.5	3.72
4/B64	4	66.73	1695	67.97	1726.4	3.8
4/B65	4	67.72	1720	68.95	1751.3	3.84
4/B66	4	68.7	1745	69.94	1776.5	3.88
4/B67	4	69.72	1771	70.96	1802.4	3.96
4/B68	4	70.71	1796	71.95	1827.5	4
4/B70	4	72.72	1847	73.95	1878.3	4.12
4/B71	4	73.7	1872	74.94	1903.5	4.2
4/B72	4	74.72	1898	75.96	1929.4	4.24
4/B73	4	75.71	1923	76.95	1954.5	4.32
4/B74	4	76.73	1949	77.97	1980.4	4.36
4/B75	4	77.72	1974	78.95	2005.3	4.44
4/B77	4	79.72	2025	80.96	2056.4	4.56
4/B78	4	80.71	2050	81.95	2081.5	4.6
4/B79	4	81.73	2076	82.97	2107.4	4.68

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
4/B80	4	82.72	2101	83.95	2132.3	4.72
4/B81	4	83.7	2126	84.94	2157.5	4.8
4/B82	4	84.72	2152	85.96	2183.4	4.84
4/B83	4	85.71	2177	86.95	2208.5	4.92
4/B84	4	86.73	2203	87.97	2234.4	4.96
4/B85	4	87.72	2228	88.95	2259.3	5.04
4/B86	4	88.7	2253	89.94	2284.5	5.08
4/B87	4	89.72	2279	90.96	2310.4	5.16
4/B88	4	90.71	2304	91.95	2335.5	5.2
4/B90	4	92.72	2355	93.95	2386.3	5.32
4/B91	4	93.7	2380	94.94	2411	5.36
4/B92	4	94.72	2406	95.96	2437.4	5.44
4/B93	4	95.71	2431	96.95	2462.5	5.48
4/B95	4	97.72	2482	98.95	2513.3	5.6
4/B96	4	98.7	2507	99.94	2538.5	5.68
4/B97	4	99.72	2533	100.96	2564.4	5.72
4/B99	4	101.73	2584	102.97	2615.4	5.84
4/B100	4	102.72	2609	103.95	2640.3	5.92
4/B103	4	105.71	2685	106.95	2716.5	6.08
4/B104	4	106.73	2711	107.97	2742.4	6.16
4/B105	4	107.72	2736	108.95	2767.3	6.2
4/B84	4	86.73	2203	87.97	2234.4	4.96
4/B85	4	87.72	2228	88.95	2259.3	5.04
4/B86	4	88.7	2253	89.94	2284.5	5.08
4/B87	4	89.72	2279	90.96	2310.4	5.16
4/B88	4	90.71	2304	91.95	2335.5	5.2
4/B90	4	92.72	2355	93.95	2386.3	5.32
4/B91	4	93.7	2380	94.94	2411	5.36
4/B92	4	94.72	2406	95.96	2437.4	5.44
4/B93	4	95.71	2431	96.95	2462.5	5.48
4/B95	4	97.72	2482	98.95	2513.3	5.6
4/B96	4	98.7	2507	99.94	2538.5	5.68
4/B91	4	93.7	2380	94.94	2411	5.36
4/B92	4	94.72	2406	95.96	2437.4	5.44
4/B93	4	95.71	2431	96.95	2462.5	5.48
4/B95	4	97.72	2482	98.95	2513.3	5.6
4/B96	4	98.7	2507	99.94	2538.5	5.68
4/B97	4	99.72	2533	100.96	2564.4	5.72
4/B99	4	101.73	2584	102.97	2615.4	5.84
4/B100	4	102.72	2609	103.95	2640.3	5.92
4/B103	4	105.71	2685	106.95	2716.5	6.08
4/B104	4	106.73	2711	107.97	2742.4	6.16
4/B105	4	107.72	2736	108.95	2767.3	6.2
4/B108	4	110.71	2812	111.95	2843.5	6.4
4/B109	4	111.73	2838	112.97	2869.4	6.44
4/B110	4	112.72	2863	113.95	2894.3	6.48
4/B112	4	114.72	2914	115.96	2945.4	6.6

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
4/B113	4	115.71	2939	116.95	2970.5	6.68
4/B114	4	116.73	2965	117.97	2996.4	6.72
4/B115	4	117.72	2990	118.95	3021.3	6.8
4/B116	4	118.7	3015	119.94	3046.5	6.84
4/B118	4	120.71	3066	121.95	3097.5	6.96
4/B120	4	122.72	3117	123.95	3148.3	7.08
4/B124	4	126.73	3219	127.97	3250.4	7.32
4/B128	4	130.71	3320	131.95	3351.5	7.56
4/B130	4	132.72	3371	133.95	3402.3	7.68
4/B133	4	135.71	3447	136.95	3478.5	7.84
4/B136	4	138.7	3523	139.94	3554.5	8.04
4/B138	4	140.71	3574	141.95	3605.5	8.16
4/B139	4	141.73	3600	142.97	3631.4	8.2
4/B140	4	142.72	3625	143.95	3656.3	8.28
4/B141	4	143.7	3650	144.94	3681.5	8.32
4/B144	4	146.73	3727	147.97	3758.4	8.52
4/B148	4	150.71	3828	151.95	3859.5	8.76
4/B150	4	152.72	3879	153.95	3910.3	8.88
4/B154	4	156.73	3981	157.97	4012.4	9.08
4/B158	4	160.71	4082	161.95	4113.5	9.32
4/B160	4	162.72	4133	163.95	4164.3	9.44
4/B162	4	164.72	4184	165.96	4215.4	9.56
4/B168	4	170.71	4336	171.95	4367.5	9.92
4/B173	4	175.71	4463	176.95	4494.5	10.24
4/B180	4	182.72	4641	183.95	4672.3	10.64
4/B185	4	187.72	4768	188.95	4799.3	10.92
4/B190	4	192.72	4895	193.95	4926.3	11.24
4/B195	4	197.72	5022	198.95	5053.3	11.52
4/B210	4	212.72	5403	213.95	5434.3	12.4
4/B218	4	220.71	5606	221.95	5637.5	12.88
4/B225	4	227.72	5784	228.95	5815.3	13.28
4/B240	4	242.72	6165	243.95	6196.3	14.2
4/B255	4	257.72	6546	258.95	6577.3	15.08
4/B270	4	272.72	6927	273.95	6958.3	15.96
4/B300	4	302.72	7689	303.95	7720.3	17.72
4/B315	4	317.72	8070	318.95	8101.3	18.6
5/B35	5	37.72	958	38.95	989.3	2.6
5/B38	5	40.71	1034	41.95	1065.5	2.8
5/B40	5	42.72	1085	43.95	1116.3	2.95
5/B41	5	43.7	1110	44.94	1141.5	3.05
5/B42	5	44.72	1136	45.96	1167.4	3.1
5/B43	5	45.71	1161	46.95	1192.5	3.2
5/B44	5	46.73	1187	47.97	1218.4	3.25
5/B46	5	48.7	1237	49.94	1268.5	3.4
5/B47	5	49.72	1263	50.96	1294.4	3.45
5/B48	5	50.71	1288	51.95	1319.5	3.55
5/B50	5	52.72	1339	53.95	1370.3	3.7

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
5/B51	5	53.7	1364	54.94	1395.5	3.75
5/B52	5	54.72	1390	55.96	1421.4	3.85
5/B53	5	55.71	1415	56.95	1446.5	3.9
5/B54	5	56.73	1441	57.97	1472.4	4
5/B55	5	57.72	1466	58.95	1497.3	4.05
5/B56	5	58.7	1491	59.94	1522.5	4.15
5/B57	5	59.72	1517	60.96	1548.4	4.2
5/B58	5	60.71	1542	61.95	1573.5	4.3
5/B59	5	61.73	1568	62.97	1599.4	4.35
5/B60	5	62.72	1593	63.95	1624.3	4.45
5/B61	5	63.7	1618	64.94	1649.5	4.5
5/B62	5	64.72	1644	65.96	1675.4	4.6
5/B63	5	65.71	1669	66.95	1700.5	4.65
5/B64	5	66.73	1695	67.97	1726.4	4.75
5/B65	5	67.72	1720	68.95	1751.3	4.8
5/B66	5	68.7	1745	69.94	1776.5	4.85
5/B67	5	69.72	1771	70.96	1802.4	4.95
5/B68	5	70.71	1796	71.95	1827.5	5
5/B70	5	72.72	1847	73.95	1878.3	5.15
5/B71	5	73.7	1872	74.94	1903.5	5.25
5/B72	5	74.72	1898	75.96	1929.4	5.3
5/B73	5	75.71	1923	76.95	1954.5	5.4
5/B74	5	76.73	1949	77.97	1980.4	5.45
5/B75	5	77.72	1974	78.95	2005.3	5.55
5/B77	5	79.72	2025	80.96	2056.4	5.7
5/B78	5	80.71	2050	81.95	2081.5	5.75
5/B79	5	81.73	2076	82.97	2107.4	5.85
5/B80	5	82.72	2101	83.95	2132.3	5.9
5/B81	5	83.7	2126	84.94	2157.5	6
5/B82	5	84.72	2152	85.96	2183.4	6.05
5/B83	5	85.71	2177	86.95	2208.5	6.15
5/B84	5	86.73	2203	87.97	2234.4	6.2
5/B85	5	87.72	2228	88.95	2259.3	6.3
5/B86	5	88.7	2253	89.94	2284.5	6.35
5/B87	5	89.72	2279	90.96	2310.4	6.45
5/B88	5	90.71	2304	91.95	2335.5	6.5
5/B90	5	92.72	2355	93.95	2386.3	6.65
5/B91	5	93.7	2380	94.94	2411	6.7
5/B92	5	94.72	2406	95.96	2437.4	6.8
5/B93	5	95.71	2431	96.95	2462.5	6.85
5/B95	5	97.72	2482	98.95	2513.3	7
5/B96	5	98.7	2507	99.94	2538.5	7.1
5/B97	5	99.72	2533	100.96	2564.4	7.15
5/B99	5	101.73	2584	102.97	2615.4	7.3
5/B100	5	102.72	2609	103.95	2640.3	7.4
5/B103	5	105.71	2685	106.95	2716.5	7.6
5/B104	5	106.73	2711	107.97	2742.4	7.7

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
5/B105	5	107.72	2736	108.95	2767.3	7.75
5/B108	5	110.71	2812	111.95	2843.5	8
5/B109	5	111.73	2838	112.97	2869.4	8.05
5/B110	5	112.72	2863	113.95	2894.3	8.1
5/B112	5	114.72	2914	115.96	2945.4	8.25
5/B113	5	115.71	2939	116.95	2970.5	8.35
5/B114	5	116.73	2965	117.97	2996.4	8.4
5/B115	5	117.72	2990	118.95	3021.3	8.5
5/B116	5	118.7	3015	119.94	3046.5	8.55
5/B118	5	120.71	3066	121.95	3097.5	8.7
5/B120	5	122.72	3117	123.95	3148.3	8.85
5/B124	5	126.73	3219	127.97	3250.4	9.15
5/B128	5	130.71	3320	131.95	3351.5	9.45
5/B130	5	132.72	3371	133.95	3402.3	9.6
5/B133	5	135.71	3447	136.95	3478.5	9.8
5/B136	5	138.7	3523	139.94	3554.5	10.05
5/B138	5	140.71	3574	141.95	3605.5	10.2
5/B139	5	141.73	3600	142.97	3631.4	10.25
5/B140	5	142.72	3625	143.95	3656.3	10.35
5/B141	5	143.7	3650	144.94	3681.5	10.4
5/B144	5	146.73	3727	147.97	3758.4	10.65
5/B148	5	150.71	3828	151.95	3859.5	10.95
5/B150	5	152.72	3879	153.95	3910.3	11.1
5/B154	5	156.73	3981	157.97	4012.4	11.35
5/B158	5	160.71	4082	161.95	4113.5	11.65
5/B160	5	162.72	4133	163.95	4164.3	11.8
5/B162	5	164.72	4184	165.96	4215.4	11.95
5/B168	5	170.71	4336	171.95	4367.5	12.4
5/B173	5	175.71	4463	176.95	4494.5	12.8
5/B180	5	182.72	4641	183.95	4672.3	13.3
5/B185	5	187.72	4768	188.95	4799.3	13.65
5/B190	5	192.72	4895	193.95	4926.3	14.05
5/B195	5	197.72	5022	198.95	5053.3	14.4
5/B210	5	212.72	5403	213.95	5434.3	15.5
5/B218	5	220.71	5606	221.95	5637.5	16.1
5/B225	5	227.72	5784	228.95	5815.3	16.6
5/B240	5	242.72	6165	243.95	6196.3	17.75
5/B255	5	257.72	6546	258.95	6577.3	18.85
5/B270	5	272.72	6927	273.95	6958.3	19.95
5/B300	5	302.72	7689	303.95	7720.3	22.15
5/B315	5	317.72	8070	318.95	8101.3	23.25
6/B35	6	37.72	958	38.95	989.3	3.12
6/B38	6	40.71	1034	41.95	1065.5	3.36
6/B40	6	42.72	1085	43.95	1116.3	3.54
6/B41	6	43.7	1110	44.94	1141.5	3.66
6/B42	6	44.72	1136	45.96	1167.4	3.72
6/B43	6	45.71	1161	46.95	1192.5	3.84

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
6/B44	6	46.73	1187	47.97	1218.4	3.9
6/B46	6	48.7	1237	49.94	1268.5	4.08
6/B47	6	49.72	1263	50.96	1294.4	4.14
6/B48	6	50.71	1288	51.95	1319.5	4.26
6/B50	6	52.72	1339	53.95	1370.3	4.44
6/B51	6	53.7	1364	54.94	1395.5	4.5
6/B52	6	54.72	1390	55.96	1421.4	4.62
6/B53	6	55.71	1415	56.95	1446.5	4.68
6/B54	6	56.73	1441	57.97	1472.4	4.8
6/B55	6	57.72	1466	58.95	1497.3	4.86
6/B56	6	58.7	1491	59.94	1522.5	4.98
6/B57	6	59.72	1517	60.96	1548.4	5.04
6/B58	6	60.71	1542	61.95	1573.5	5.16
6/B59	6	61.73	1568	62.97	1599.4	5.22
6/B60	6	62.72	1593	63.95	1624.3	5.34
6/B61	6	63.7	1618	64.94	1649.5	5.4
6/B62	6	64.72	1644	65.96	1675.4	5.52
6/B63	6	65.71	1669	66.95	1700.5	5.58
6/B64	6	66.73	1695	67.97	1726.4	5.7
6/B65	6	67.72	1720	68.95	1751.3	5.76
6/B66	6	68.7	1745	69.94	1776.5	5.82
6/B67	6	69.72	1771	70.96	1802.4	5.94
6/B68	6	70.71	1796	71.95	1827.5	6
6/B70	6	72.72	1847	73.95	1878.3	6.18
6/B71	6	73.7	1872	74.94	1903.5	6.3
6/B72	6	74.72	1898	75.96	1929.4	6.36
6/B73	6	75.71	1923	76.95	1954.5	6.48
6/B74	6	76.73	1949	77.97	1980.4	6.54
6/B75	6	77.72	1974	78.95	2005.3	6.66
6/B77	6	79.72	2025	80.96	2056.4	6.84
6/B78	6	80.71	2050	81.95	2081.5	6.9
6/B79	6	81.73	2076	82.97	2107.4	7.02
6/B80	6	82.72	2101	83.95	2132.3	7.08
6/B81	6	83.7	2126	84.94	2157.5	7.2
6/B82	6	84.72	2152	85.96	2183.4	7.26
6/B83	6	85.71	2177	86.95	2208.5	7.38
6/B84	6	86.73	2203	87.97	2234.4	7.44
6/B85	6	87.72	2228	88.95	2259.3	7.56
6/B86	6	88.7	2253	89.94	2284.5	7.62
6/B87	6	89.72	2279	90.96	2310.4	7.74
6/B88	6	90.71	2304	91.95	2335.5	7.8
6/B90	6	92.72	2355	93.95	2386.3	7.98
6/B91	6	93.7	2380	94.94	2411	8.04
6/B92	6	94.72	2406	95.96	2437.4	8.16
6/B93	6	95.71	2431	96.95	2462.5	8.22
6/B95	6	97.72	2482	98.95	2513.3	8.4
6/B96	6	98.7	2507	99.94	2538.5	8.52

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
6/B97	6	99.72	2533	100.96	2564.4	8.58
6/B99	6	101.73	2584	102.97	2615.4	8.76
6/B100	6	102.72	2609	103.95	2640.3	8.88
6/B103	6	105.71	2685	106.95	2716.5	9.12
6/B104	6	106.73	2711	107.97	2742.4	9.24
6/B105	6	107.72	2736	108.95	2767.3	9.3
6/B108	6	110.71	2812	111.95	2843.5	9.6
6/B109	6	111.73	2838	112.97	2869.4	9.66
6/B110	6	112.72	2863	113.95	2894.3	9.72
6/B112	6	114.72	2914	115.96	2945.4	9.9
6/B113	6	115.71	2939	116.95	2970.5	10.02
6/B114	6	116.73	2965	117.97	2996.4	10.08
6/B115	6	117.72	2990	118.95	3021.3	10.2
6/B116	6	118.7	3015	119.94	3046.5	10.26
6/B118	6	120.71	3066	121.95	3097.5	10.44
6/B120	6	122.72	3117	123.95	3148.3	10.62
6/B124	6	126.73	3219	127.97	3250.4	10.98
6/B128	6	130.71	3320	131.95	3351.5	11.34
6/B130	6	132.72	3371	133.95	3402.3	11.52
6/B133	6	135.71	3447	136.95	3478.5	11.76
6/B136	6	138.7	3523	139.94	3554.5	12.06
6/B138	6	140.71	3574	141.95	3605.5	12.24
6/B139	6	141.73	3600	142.97	3631.4	12.3
6/B140	6	142.72	3625	143.95	3656.3	12.42
6/B141	6	143.7	3650	144.94	3681.5	12.48
6/B144	6	146.73	3727	147.97	3758.4	12.78
6/B148	6	150.71	3828	151.95	3859.5	13.14
6/B150	6	152.72	3879	153.95	3910.3	13.32
6/B154	6	156.73	3981	157.97	4012.4	13.62
6/B158	6	160.71	4082	161.95	4113.5	13.98
6/B160	6	162.72	4133	163.95	4164.3	14.16
6/B162	6	164.72	4184	165.96	4215.4	14.34
6/B168	6	170.71	4336	171.95	4367.5	14.88
6/B173	6	175.71	4463	176.95	4494.5	15.36
6/B180	6	182.72	4641	183.95	4672.3	15.96
6/B185	6	187.72	4768	188.95	4799.3	16.38
6/B190	6	192.72	4895	193.95	4926.3	16.86
6/B195	6	197.72	5022	198.95	5053.3	17.28
6/B210	6	212.72	5403	213.95	5434.3	18.6
6/B218	6	220.71	5606	221.95	5637.5	19.32
6/B225	6	227.72	5784	228.95	5815.3	19.92
6/B240	6	242.72	6165	243.95	6196.3	21.3
6/B255	6	257.72	6546	258.95	6577.3	22.62
6/B270	6	272.72	6927	273.95	6958.3	23.94
6/B300	6	302.72	7689	303.95	7720.3	26.58
6/B315	6	317.72	8070	318.95	8101.3	27.9
7/B35	7	37.72	958	38.95	989.3	3.64

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
7/B38	7	40.71	1034	41.95	1065.5	3.92
7/B40	7	42.72	1085	43.95	1116.3	4.13
7/B41	7	43.7	1110	44.94	1141.5	4.27
7/B42	7	44.72	1136	45.96	1167.4	4.34
7/B43	7	45.71	1161	46.95	1192.5	4.48
7/B44	7	46.73	1187	47.97	1218.4	4.55
7/B46	7	48.7	1237	49.94	1268.5	4.76
7/B47	7	49.72	1263	50.96	1294.4	4.83
7/B48	7	50.71	1288	51.95	1319.5	4.97
7/B50	7	52.72	1339	53.95	1370.3	5.18
7/B51	7	53.7	1364	54.94	1395.5	5.25
7/B52	7	54.72	1390	55.96	1421.4	5.39
7/B53	7	55.71	1415	56.95	1446.5	5.46
7/B54	7	56.73	1441	57.97	1472.4	5.6
7/B55	7	57.72	1466	58.95	1497.3	5.67
7/B56	7	58.7	1491	59.94	1522.5	5.81
7/B57	7	59.72	1517	60.96	1548.4	5.88
7/B58	7	60.71	1542	61.95	1573.5	6.02
7/B59	7	61.73	1568	62.97	1599.4	6.09
7/B60	7	62.72	1593	63.95	1624.3	6.23
7/B61	7	63.7	1618	64.94	1649.5	6.3
7/B62	7	64.72	1644	65.96	1675.4	6.44
7/B63	7	65.71	1669	66.95	1700.5	6.51
7/B64	7	66.73	1695	67.97	1726.4	6.65
7/B65	7	67.72	1720	68.95	1751.3	6.72
7/B66	7	68.7	1745	69.94	1776.5	6.79
7/B67	7	69.72	1771	70.96	1802.4	6.93
7/B68	7	70.71	1796	71.95	1827.5	7
7/B70	7	72.72	1847	73.95	1878.3	7.21
7/B71	7	73.7	1872	74.94	1903.5	7.35
7/B72	7	74.72	1898	75.96	1929.4	7.42
7/B73	7	75.71	1923	76.95	1954.5	7.56
7/B74	7	76.73	1949	77.97	1980.4	7.63
7/B75	7	77.72	1974	78.95	2005.3	7.77
7/B77	7	79.72	2025	80.96	2056.4	7.98
7/B78	7	80.71	2050	81.95	2081.5	8.05
7/B79	7	81.73	2076	82.97	2107.4	8.19
7/B80	7	82.72	2101	83.95	2132.3	8.26
7/B81	7	83.7	2126	84.94	2157.5	8.4
7/B82	7	84.72	2152	85.96	2183.4	8.47
7/B83	7	85.71	2177	86.95	2208.5	8.61
7/B84	7	86.73	2203	87.97	2234.4	8.68
7/B85	7	87.72	2228	88.95	2259.3	8.82
7/B86	7	88.7	2253	89.94	2284.5	8.89
7/B87	7	89.72	2279	90.96	2310.4	9.03
7/B88	7	90.71	2304	91.95	2335.5	9.1
7/B90	7	92.72	2355	93.95	2386.3	9.31

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
7/B91	7	93.7	2380	94.94	2411	9.38
7/B92	7	94.72	2406	95.96	2437.4	9.52
7/B93	7	95.71	2431	96.95	2462.5	9.59
7/B95	7	97.72	2482	98.95	2513.3	9.8
7/B96	7	98.7	2507	99.94	2538.5	9.94
7/B97	7	99.72	2533	100.96	2564.4	10.01
7/B99	7	101.73	2584	102.97	2615.4	10.22
7/B100	7	102.72	2609	103.95	2640.3	10.36
7/B103	7	105.71	2685	106.95	2716.5	10.64
7/B104	7	106.73	2711	107.97	2742.4	10.78
7/B105	7	107.72	2736	108.95	2767.3	10.85
7/B108	7	110.71	2812	111.95	2843.5	11.2
7/B109	7	111.73	2838	112.97	2869.4	11.27
7/B110	7	112.72	2863	113.95	2894.3	11.34
7/B112	7	114.72	2914	115.96	2945.4	11.55
7/B113	7	115.71	2939	116.95	2970.5	11.69
7/B114	7	116.73	2965	117.97	2996.4	11.76
7/B115	7	117.72	2990	118.95	3021.3	11.9
7/B116	7	118.7	3015	119.94	3046.5	11.97
7/B118	7	120.71	3066	121.95	3097.5	12.18
7/B120	7	122.72	3117	123.95	3148.3	12.39
7/B124	7	126.73	3219	127.97	3250.4	12.81
7/B128	7	130.71	3320	131.95	3351.5	13.23
7/B130	7	132.72	3371	133.95	3402.3	13.44
7/B133	7	135.71	3447	136.95	3478.5	13.72
7/B136	7	138.7	3523	139.94	3554.5	14.07
7/B138	7	140.71	3574	141.95	3605.5	14.28
7/B139	7	141.73	3600	142.97	3631.4	14.35
7/B140	7	142.72	3625	143.95	3656.3	14.49
7/B141	7	143.7	3650	144.94	3681.5	14.56
7/B144	7	146.73	3727	147.97	3758.4	14.91
7/B148	7	150.71	3828	151.95	3859.5	15.33
7/B150	7	152.72	3879	153.95	3910.3	15.54
7/B154	7	156.73	3981	157.97	4012.4	15.89
7/B158	7	160.71	4082	161.95	4113.5	16.31
7/B160	7	162.72	4133	163.95	4164.3	16.52
7/B162	7	164.72	4184	165.96	4215.4	16.73
7/B168	7	170.71	4336	171.95	4367.5	17.36
7/B173	7	175.71	4463	176.95	4494.5	17.92
7/B180	7	182.72	4641	183.95	4672.3	18.62
7/B185	7	187.72	4768	188.95	4799.3	19.11
7/B190	7	192.72	4895	193.95	4926.3	19.67
7/B195	7	197.72	5022	198.95	5053.3	20.16
7/B210	7	212.72	5403	213.95	5434.3	21.7
7/B218	7	220.71	5606	221.95	5637.5	22.54
7/B225	7	227.72	5784	228.95	5815.3	23.24
7/B240	7	242.72	6165	243.95	6196.3	24.85

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
7/B255	7	257.72	6546	258.95	6577.3	26.39
7/B270	7	272.72	6927	273.95	6958.3	27.93
7/B300	7	302.72	7689	303.95	7720.3	31.01
7/B315	7	317.72	8070	318.95	8101.3	32.55
8/B35	8	37.72	958	38.95	989.3	4.16
8/B38	8	40.71	1034	41.95	1065.5	4.48
8/B40	8	42.72	1085	43.95	1116.3	4.72
8/B41	8	43.7	1110	44.94	1141.5	4.88
8/B42	8	44.72	1136	45.96	1167.4	4.96
8/B43	8	45.71	1161	46.95	1192.5	5.12
8/B44	8	46.73	1187	47.97	1218.4	5.2
8/B46	8	48.7	1237	49.94	1268.5	5.44
8/B47	8	49.72	1263	50.96	1294.4	5.52
8/B48	8	50.71	1288	51.95	1319.5	5.68
8/B50	8	52.72	1339	53.95	1370.3	5.92
8/B51	8	53.7	1364	54.94	1395.5	6
8/B52	8	54.72	1390	55.96	1421.4	6.16
8/B53	8	55.71	1415	56.95	1446.5	6.24
8/B54	8	56.73	1441	57.97	1472.4	6.4
8/B55	8	57.72	1466	58.95	1497.3	6.48
8/B56	8	58.7	1491	59.94	1522.5	6.64
8/B57	8	59.72	1517	60.96	1548.4	6.72
8/B58	8	60.71	1542	61.95	1573.5	6.88
8/B59	8	61.73	1568	62.97	1599.4	6.96
8/B60	8	62.72	1593	63.95	1624.3	7.12
8/B61	8	63.7	1618	64.94	1649.5	7.2
8/B62	8	64.72	1644	65.96	1675.4	7.36
8/B63	8	65.71	1669	66.95	1700.5	7.44
8/B64	8	66.73	1695	67.97	1726.4	7.6
8/B65	8	67.72	1720	68.95	1751.3	7.68
8/B66	8	68.7	1745	69.94	1776.5	7.76
8/B67	8	69.72	1771	70.96	1802.4	7.92
8/B68	8	70.71	1796	71.95	1827.5	8
8/B70	8	72.72	1847	73.95	1878.3	8.24
8/B71	8	73.7	1872	74.94	1903.5	8.4
8/B72	8	74.72	1898	75.96	1929.4	8.48
8/B73	8	75.71	1923	76.95	1954.5	8.64
8/B74	8	76.73	1949	77.97	1980.4	8.72
8/B75	8	77.72	1974	78.95	2005.3	8.88
8/B77	8	79.72	2025	80.96	2056.4	9.12
8/B78	8	80.71	2050	81.95	2081.5	9.2
8/B79	8	81.73	2076	82.97	2107.4	9.36
8/B80	8	82.72	2101	83.95	2132.3	9.44
8/B81	8	83.7	2126	84.94	2157.5	9.6
8/B82	8	84.72	2152	85.96	2183.4	9.68
8/B83	8	85.71	2177	86.95	2208.5	9.84
8/B84	8	86.73	2203	87.97	2234.4	9.92

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
8/B85	8	87.72	2228	88.95	2259.3	10.08
8/B86	8	88.7	2253	89.94	2284.5	10.16
8/B87	8	89.72	2279	90.96	2310.4	10.32
8/B88	8	90.71	2304	91.95	2335.5	10.4
8/B90	8	92.72	2355	93.95	2386.3	10.64
8/B91	8	93.7	2380	94.94	2411	10.72
8/B92	8	94.72	2406	95.96	2437.4	10.88
8/B93	8	95.71	2431	96.95	2462.5	10.96
8/B95	8	97.72	2482	98.95	2513.3	11.2
8/B96	8	98.7	2507	99.94	2538.5	11.36
8/B97	8	99.72	2533	100.96	2564.4	11.44
8/B99	8	101.73	2584	102.97	2615.4	11.68
8/B100	8	102.72	2609	103.95	2640.3	11.84
8/B103	8	105.71	2685	106.95	2716.5	12.16
8/B104	8	106.73	2711	107.97	2742.4	12.32
8/B105	8	107.72	2736	108.95	2767.3	12.4
8/B108	8	110.71	2812	111.95	2843.5	12.8
8/B109	8	111.73	2838	112.97	2869.4	12.88
8/B110	8	112.72	2863	113.95	2894.3	12.96
8/B112	8	114.72	2914	115.96	2945.4	13.2
8/B113	8	115.71	2939	116.95	2970.5	13.36
8/B114	8	116.73	2965	117.97	2996.4	13.44
8/B115	8	117.72	2990	118.95	3021.3	13.6
8/B116	8	118.7	3015	119.94	3046.5	13.68
8/B118	8	120.71	3066	121.95	3097.5	13.92
8/B120	8	122.72	3117	123.95	3148.3	14.16
8/B124	8	126.73	3219	127.97	3250.4	14.64
8/B128	8	130.71	3320	131.95	3351.5	15.12
8/B130	8	132.72	3371	133.95	3402.3	15.36
8/B133	8	135.71	3447	136.95	3478.5	15.68
8/B136	8	138.7	3523	139.94	3554.5	16.08
8/B138	8	140.71	3574	141.95	3605.5	16.32
8/B139	8	141.73	3600	142.97	3631.4	16.4
8/B133	8	135.71	3447	136.95	3478.5	15.68
8/B136	8	138.7	3523	139.94	3554.5	16.08
8/B138	8	140.71	3574	141.95	3605.5	16.32
8/B139	8	141.73	3600	142.97	3631.4	16.4
8/B140	8	142.72	3625	143.95	3656.3	16.56
8/B141	8	143.7	3650	144.94	3681.5	16.64
8/B144	8	146.73	3727	147.97	3758.4	17.04
8/B148	8	150.71	3828	151.95	3859.5	17.52
8/B150	8	152.72	3879	153.95	3910.3	17.76
8/B154	8	156.73	3981	157.97	4012.4	18.16
8/B158	8	160.71	4082	161.95	4113.5	18.64
8/B160	8	162.72	4133	163.95	4164.3	18.88
8/B162	8	164.72	4184	165.96	4215.4	19.12
8/B168	8	170.71	4336	171.95	4367.5	19.84

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
8/B173	8	175.71	4463	176.95	4494.5	20.48
8/B180	8	182.72	4641	183.95	4672.3	21.28
8/B185	8	187.72	4768	188.95	4799.3	21.84
8/B190	8	192.72	4895	193.95	4926.3	22.48
8/B195	8	197.72	5022	198.95	5053.3	23.04
8/B210	8	212.72	5403	213.95	5434.3	24.8
8/B218	8	220.71	5606	221.95	5637.5	25.76
8/B225	8	227.72	5784	228.95	5815.3	26.56
8/B240	8	242.72	6165	243.95	6196.3	28.4
8/B255	8	257.72	6546	258.95	6577.3	30.16
8/B270	8	272.72	6927	273.95	6958.3	31.92
8/B300	8	302.72	7689	303.95	7720.3	35.44
8/B315	8	317.72	8070	318.95	8101.3	37.2
9/B35	9	37.72	958	38.95	989.3	4.68
9/B38	9	40.71	1034	41.95	1065.5	5.04
9/B40	9	42.72	1085	43.95	1116.3	5.31
9/B41	9	43.7	1110	44.94	1141.5	5.49
9/B42	9	44.72	1136	45.96	1167.4	5.58
9/B43	9	45.71	1161	46.95	1192.5	5.76
9/B44	9	46.73	1187	47.97	1218.4	5.85
9/B46	9	48.7	1237	49.94	1268.5	6.12
9/B47	9	49.72	1263	50.96	1294.4	6.21
9/B48	9	50.71	1288	51.95	1319.5	6.39
9/B50	9	52.72	1339	53.95	1370.3	6.66
9/B51	9	53.7	1364	54.94	1395.5	6.75
9/B52	9	54.72	1390	55.96	1421.4	6.93
9/B53	9	55.71	1415	56.95	1446.5	7.02
9/B42	9	44.72	1136	45.96	1167.4	5.58
9/B43	9	45.71	1161	46.95	1192.5	5.76
9/B44	9	46.73	1187	47.97	1218.4	5.85
9/B46	9	48.7	1237	49.94	1268.5	6.12
9/B47	9	49.72	1263	50.96	1294.4	6.21
9/B48	9	50.71	1288	51.95	1319.5	6.39
9/B50	9	52.72	1339	53.95	1370.3	6.66
9/B51	9	53.7	1364	54.94	1395.5	6.75
9/B52	9	54.72	1390	55.96	1421.4	6.93
9/B53	9	55.71	1415	56.95	1446.5	7.02
9/B54	9	56.73	1441	57.97	1472.4	7.2
9/B55	9	57.72	1466	58.95	1497.3	7.29
9/B56	9	58.7	1491	59.94	1522.5	7.47
9/B57	9	59.72	1517	60.96	1548.4	7.56
9/B58	9	60.71	1542	61.95	1573.5	7.74
9/B59	9	61.73	1568	62.97	1599.4	7.83
9/B60	9	62.72	1593	63.95	1624.3	8.01
9/B61	9	63.7	1618	64.94	1649.5	8.1
9/B62	9	64.72	1644	65.96	1675.4	8.28
9/B63	9	65.71	1669	66.95	1700.5	8.37

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
9/B64	9	66.73	1695	67.97	1726.4	8.55
9/B65	9	67.72	1720	68.95	1751.3	8.64
9/B66	9	68.7	1745	69.94	1776.5	8.73
9/B67	9	69.72	1771	70.96	1802.4	8.91
9/B68	9	70.71	1796	71.95	1827.5	9
9/B70	9	72.72	1847	73.95	1878.3	9.27
9/B71	9	73.7	1872	74.94	1903.5	9.45
9/B72	9	74.72	1898	75.96	1929.4	9.54
9/B73	9	75.71	1923	76.95	1954.5	9.72
9/B74	9	76.73	1949	77.97	1980.4	9.81
9/B75	9	77.72	1974	78.95	2005.3	9.99
9/B77	9	79.72	2025	80.96	2056.4	10.26
9/B78	9	80.71	2050	81.95	2081.5	10.35
9/B79	9	81.73	2076	82.97	2107.4	10.53
9/B80	9	82.72	2101	83.95	2132.3	10.62
9/B81	9	83.7	2126	84.94	2157.5	10.8
9/B82	9	84.72	2152	85.96	2183.4	10.89
9/B83	9	85.71	2177	86.95	2208.5	11.07
9/B84	9	86.73	2203	87.97	2234.4	11.16
9/B68	9	70.71	1796	71.95	1827.5	9
9/B70	9	72.72	1847	73.95	1878.3	9.27
9/B71	9	73.7	1872	74.94	1903.5	9.45
9/B72	9	74.72	1898	75.96	1929.4	9.54
9/B73	9	75.71	1923	76.95	1954.5	9.72
9/B74	9	76.73	1949	77.97	1980.4	9.81
9/B75	9	77.72	1974	78.95	2005.3	9.99
9/B77	9	79.72	2025	80.96	2056.4	10.26
9/B78	9	80.71	2050	81.95	2081.5	10.35
9/B79	9	81.73	2076	82.97	2107.4	10.53
9/B80	9	82.72	2101	83.95	2132.3	10.62
9/B81	9	83.7	2126	84.94	2157.5	10.8
9/B82	9	84.72	2152	85.96	2183.4	10.89
9/B83	9	85.71	2177	86.95	2208.5	11.07
9/B84	9	86.73	2203	87.97	2234.4	11.16
9/B85	9	87.72	2228	88.95	2259.3	11.34
9/B86	9	88.7	2253	89.94	2284.5	11.43
9/B87	9	89.72	2279	90.96	2310.4	11.61
9/B88	9	90.71	2304	91.95	2335.5	11.7
9/B90	9	92.72	2355	93.95	2386.3	11.97
9/B91	9	93.7	2380	94.94	2411	12.06
9/B92	9	94.72	2406	95.96	2437.4	12.24
9/B93	9	95.71	2431	96.95	2462.5	12.33
9/B95	9	97.72	2482	98.95	2513.3	12.6
9/B96	9	98.7	2507	99.94	2538.5	12.78
9/B97	9	99.72	2533	100.96	2564.4	12.87
9/B99	9	101.73	2584	102.97	2615.4	13.14
9/B100	9	102.72	2609	103.95	2640.3	13.32

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
9/B103	9	105.71	2685	106.95	2716.5	13.68
9/B104	9	106.73	2711	107.97	2742.4	13.86
9/B105	9	107.72	2736	108.95	2767.3	13.95
9/B108	9	110.71	2812	111.95	2843.5	14.4
9/B109	9	111.73	2838	112.97	2869.4	14.49
9/B110	9	112.72	2863	113.95	2894.3	14.58
9/B112	9	114.72	2914	115.96	2945.4	14.85
9/B113	9	115.71	2939	116.95	2970.5	15.03
9/B114	9	116.73	2965	117.97	2996.4	15.12
9/B115	9	117.72	2990	118.95	3021.3	15.3
9/B116	9	118.7	3015	119.94	3046.5	15.39
9/B118	9	120.71	3066	121.95	3097.5	15.66
9/B120	9	122.72	3117	123.95	3148.3	15.93
9/B124	9	126.73	3219	127.97	3250.4	16.47
9/B128	9	130.71	3320	131.95	3351.5	17.01
9/B130	9	132.72	3371	133.95	3402.3	17.28
9/B133	9	135.71	3447	136.95	3478.5	17.64
9/B136	9	138.7	3523	139.94	3554.5	18.09
9/B138	9	140.71	3574	141.95	3605.5	18.36
9/B139	9	141.73	3600	142.97	3631.4	18.45
9/B140	9	142.72	3625	143.95	3656.3	18.63
9/B141	9	143.7	3650	144.94	3681.5	18.72
9/B144	9	146.73	3727	147.97	3758.4	19.17
9/B148	9	150.71	3828	151.95	3859.5	19.71
9/B150	9	152.72	3879	153.95	3910.3	19.98
9/B154	9	156.73	3981	157.97	4012.4	20.43
9/B158	9	160.71	4082	161.95	4113.5	20.97
9/B160	9	162.72	4133	163.95	4164.3	21.24
9/B162	9	164.72	4184	165.96	4215.4	21.51
9/B168	9	170.71	4336	171.95	4367.5	22.32
9/B173	9	175.71	4463	176.95	4494.5	23.04
9/B180	9	182.72	4641	183.95	4672.3	23.94
9/B185	9	187.72	4768	188.95	4799.3	24.57
9/B190	9	192.72	4895	193.95	4926.3	25.29
9/B195	9	197.72	5022	198.95	5053.3	25.92
9/B210	9	212.72	5403	213.95	5434.3	27.9
9/B218	9	220.71	5606	221.95	5637.5	28.98
9/B225	9	227.72	5784	228.95	5815.3	29.88
9/B240	9	242.72	6165	243.95	6196.3	31.95
9/B255	9	257.72	6546	258.95	6577.3	33.93
9/B270	9	272.72	6927	273.95	6958.3	35.91
9/B300	9	302.72	7689	303.95	7720.3	39.87
9/B315	9	317.72	8070	318.95	8101.3	41.85
10/B35	10	37.72	958	38.95	989.3	5.2
10/B38	10	40.71	1034	41.95	1065.5	5.6
10/B40	10	42.72	1085	43.95	1116.3	5.9
10/B41	10	43.7	1110	44.94	1141.5	6.1

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
10/B42	10	44.72	1136	45.96	1167.4	6.2
10/B43	10	45.71	1161	46.95	1192.5	6.4
10/B44	10	46.73	1187	47.97	1218.4	6.5
10/B46	10	48.7	1237	49.94	1268.5	6.8
10/B47	10	49.72	1263	50.96	1294.4	6.9
10/B48	10	50.71	1288	51.95	1319.5	7.1
10/B50	10	52.72	1339	53.95	1370.3	7.4
10/B51	10	53.7	1364	54.94	1395.5	7.5
10/B52	10	54.72	1390	55.96	1421.4	7.7
10/B53	10	55.71	1415	56.95	1446.5	7.8
10/B54	10	56.73	1441	57.97	1472.4	8
10/B55	10	57.72	1466	58.95	1497.3	8.1
10/B56	10	58.7	1491	59.94	1522.5	8.3
10/B57	10	59.72	1517	60.96	1548.4	8.4
10/B58	10	60.71	1542	61.95	1573.5	8.6
10/B59	10	61.73	1568	62.97	1599.4	8.7
10/B60	10	62.72	1593	63.95	1624.3	8.9
10/B61	10	63.7	1618	64.94	1649.5	9
10/B62	10	64.72	1644	65.96	1675.4	9.2
10/B63	10	65.71	1669	66.95	1700.5	9.3
10/B64	10	66.73	1695	67.97	1726.4	9.5
10/B65	10	67.72	1720	68.95	1751.3	9.6
10/B66	10	68.7	1745	69.94	1776.5	9.7
10/B67	10	69.72	1771	70.96	1802.4	9.9
10/B68	10	70.71	1796	71.95	1827.5	10
10/B70	10	72.72	1847	73.95	1878.3	10.3
10/B71	10	73.7	1872	74.94	1903.5	10.5
10/B72	10	74.72	1898	75.96	1929.4	10.6
10/B73	10	75.71	1923	76.95	1954.5	10.8
10/B74	10	76.73	1949	77.97	1980.4	10.9
10/B70	10	72.72	1847	73.95	1878.3	10.3
10/B71	10	73.7	1872	74.94	1903.5	10.5
10/B72	10	74.72	1898	75.96	1929.4	10.6
10/B73	10	75.71	1923	76.95	1954.5	10.8
10/B74	10	76.73	1949	77.97	1980.4	10.9
10/B75	10	77.72	1974	78.95	2005.3	11.1
10/B77	10	79.72	2025	80.96	2056.4	11.4
10/B78	10	80.71	2050	81.95	2081.5	11.5
10/B79	10	81.73	2076	82.97	2107.4	11.7
10/B80	10	82.72	2101	83.95	2132.3	11.8
10/B81	10	83.7	2126	84.94	2157.5	12
10/B82	10	84.72	2152	85.96	2183.4	12.1
10/B83	10	85.71	2177	86.95	2208.5	12.3
10/B84	10	86.73	2203	87.97	2234.4	12.4
10/B85	10	87.72	2228	88.95	2259.3	12.6
10/B86	10	88.7	2253	89.94	2284.5	12.7
10/B87	10	89.72	2279	90.96	2310.4	12.9

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
10/B88	10	90.71	2304	91.95	2335.5	13
10/B90	10	92.72	2355	93.95	2386.3	13.3
10/B91	10	93.7	2380	94.94	2411	13.4
10/B92	10	94.72	2406	95.96	2437.4	13.6
10/B93	10	95.71	2431	96.95	2462.5	13.7
10/B95	10	97.72	2482	98.95	2513.3	14
10/B96	10	98.7	2507	99.94	2538.5	14.2
10/B97	10	99.72	2533	100.96	2564.4	14.3
10/B99	10	101.73	2584	102.97	2615.4	14.6
10/B100	10	102.72	2609	103.95	2640.3	14.8
10/B103	10	105.71	2685	106.95	2716.5	15.2
10/B104	10	106.73	2711	107.97	2742.4	15.4
10/B105	10	107.72	2736	108.95	2767.3	15.5
10/B108	10	110.71	2812	111.95	2843.5	16
10/B109	10	111.73	2838	112.97	2869.4	16.1
10/B110	10	112.72	2863	113.95	2894.3	16.2
10/B112	10	114.72	2914	115.96	2945.4	16.5
10/B113	10	115.71	2939	116.95	2970.5	16.7
10/B114	10	116.73	2965	117.97	2996.4	16.8
10/B115	10	117.72	2990	118.95	3021.3	17
10/B116	10	118.7	3015	119.94	3046.5	17.1
10/B118	10	120.71	3066	121.95	3097.5	17.4
10/B120	10	122.72	3117	123.95	3148.3	17.7
10/B124	10	126.73	3219	127.97	3250.4	18.3
10/B128	10	130.71	3320	131.95	3351.5	18.9
10/B130	10	132.72	3371	133.95	3402.3	19.2
10/B133	10	135.71	3447	136.95	3478.5	19.6
10/B136	10	138.7	3523	139.94	3554.5	20.1
10/B138	10	140.71	3574	141.95	3605.5	20.4
10/B139	10	141.73	3600	142.97	3631.4	20.5
10/B140	10	142.72	3625	143.95	3656.3	20.7
10/B141	10	143.7	3650	144.94	3681.5	20.8
10/B144	10	146.73	3727	147.97	3758.4	21.3
10/B148	10	150.71	3828	151.95	3859.5	21.9
10/B150	10	152.72	3879	153.95	3910.3	22.2
10/B154	10	156.73	3981	157.97	4012.4	22.7
10/B158	10	160.71	4082	161.95	4113.5	23.3
10/B160	10	162.72	4133	163.95	4164.3	23.6
10/B162	10	164.72	4184	165.96	4215.4	23.9
10/B168	10	170.71	4336	171.95	4367.5	24.8
10/B173	10	175.71	4463	176.95	4494.5	25.6
10/B180	10	182.72	4641	183.95	4672.3	26.6
10/B185	10	187.72	4768	188.95	4799.3	27.3
10/B190	10	192.72	4895	193.95	4926.3	28.1
10/B195	10	197.72	5022	198.95	5053.3	28.8
10/B210	10	212.72	5403	213.95	5434.3	31
10/B218	10	220.71	5606	221.95	5637.5	32.2

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
10/B225	10	227.72	5784	228.95	5815.3	33.2
10/B240	10	242.72	6165	243.95	6196.3	35.5
10/B255	10	257.72	6546	258.95	6577.3	37.7
10/B270	10	272.72	6927	273.95	6958.3	39.9
10/B300	10	302.72	7689	303.95	7720.3	44.3
10/B315	10	317.72	8070	318.95	8101.3	46.5
11/B35	11	37.72	958	38.95	989.3	5.72
11/B38	11	40.71	1034	41.95	1065.5	6.16
11/B40	11	42.72	1085	43.95	1116.3	6.49
11/B41	11	43.7	1110	44.94	1141.5	6.71
11/B42	11	44.72	1136	45.96	1167.4	6.82
11/B43	11	45.71	1161	46.95	1192.5	7.04
11/B44	11	46.73	1187	47.97	1218.4	7.15
11/B46	11	48.7	1237	49.94	1268.5	7.48
11/B47	11	49.72	1263	50.96	1294.4	7.59
11/B48	11	50.71	1288	51.95	1319.5	7.81
11/B50	11	52.72	1339	53.95	1370.3	8.14
11/B51	11	53.7	1364	54.94	1395.5	8.25
11/B52	11	54.72	1390	55.96	1421.4	8.47
11/B53	11	55.71	1415	56.95	1446.5	8.58
11/B54	11	56.73	1441	57.97	1472.4	8.8
11/B55	11	57.72	1466	58.95	1497.3	8.91
11/B56	11	58.7	1491	59.94	1522.5	9.13
11/B57	11	59.72	1517	60.96	1548.4	9.24
11/B58	11	60.71	1542	61.95	1573.5	9.46
11/B59	11	61.73	1568	62.97	1599.4	9.57
11/B60	11	62.72	1593	63.95	1624.3	9.79
11/B61	11	63.7	1618	64.94	1649.5	9.9
11/B62	11	64.72	1644	65.96	1675.4	10.12
11/B63	11	65.71	1669	66.95	1700.5	10.23
11/B64	11	66.73	1695	67.97	1726.4	10.45
11/B65	11	67.72	1720	68.95	1751.3	10.56
11/B66	11	68.7	1745	69.94	1776.5	10.67
11/B67	11	69.72	1771	70.96	1802.4	10.89
11/B68	11	70.71	1796	71.95	1827.5	11
11/B70	11	72.72	1847	73.95	1878.3	11.33
11/B71	11	73.7	1872	74.94	1903.5	11.55
11/B72	11	74.72	1898	75.96	1929.4	11.66
11/B73	11	75.71	1923	76.95	1954.5	11.88
11/B74	11	76.73	1949	77.97	1980.4	11.99
11/B75	11	77.72	1974	78.95	2005.3	12.21
11/B77	11	79.72	2025	80.96	2056.4	12.54
11/B78	11	80.71	2050	81.95	2081.5	12.65
11/B79	11	81.73	2076	82.97	2107.4	12.87
11/B80	11	82.72	2101	83.95	2132.3	12.98
11/B81	11	83.7	2126	84.94	2157.5	13.2
11/B82	11	84.72	2152	85.96	2183.4	13.31

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
11/B83	11	85.71	2177	86.95	2208.5	13.53
11/B84	11	86.73	2203	87.97	2234.4	13.64
11/B85	11	87.72	2228	88.95	2259.3	13.86
11/B86	11	88.7	2253	89.94	2284.5	13.97
11/B87	11	89.72	2279	90.96	2310.4	14.19
11/B88	11	90.71	2304	91.95	2335.5	14.3
11/B90	11	92.72	2355	93.95	2386.3	14.63
11/B91	11	93.7	2380	94.94	2411	14.74
11/B92	11	94.72	2406	95.96	2437.4	14.96
11/B93	11	95.71	2431	96.95	2462.5	15.07
11/B95	11	97.72	2482	98.95	2513.3	15.4
11/B96	11	98.7	2507	99.94	2538.5	15.62
11/B97	11	99.72	2533	100.96	2564.4	15.73
11/B99	11	101.73	2584	102.97	2615.4	16.06
11/B100	11	102.72	2609	103.95	2640.3	16.28
11/B103	11	105.71	2685	106.95	2716.5	16.72
11/B104	11	106.73	2711	107.97	2742.4	16.94
11/B105	11	107.72	2736	108.95	2767.3	17.05
11/B108	11	110.71	2812	111.95	2843.5	17.6
11/B109	11	111.73	2838	112.97	2869.4	17.71
11/B110	11	112.72	2863	113.95	2894.3	17.82
11/B112	11	114.72	2914	115.96	2945.4	18.15
11/B113	11	115.71	2939	116.95	2970.5	18.37
11/B114	11	116.73	2965	117.97	2996.4	18.48
11/B115	11	117.72	2990	118.95	3021.3	18.7
11/B116	11	118.7	3015	119.94	3046.5	18.81
11/B118	11	120.71	3066	121.95	3097.5	19.14
11/B120	11	122.72	3117	123.95	3148.3	19.47
11/B124	11	126.73	3219	127.97	3250.4	20.13
11/B128	11	130.71	3320	131.95	3351.5	20.79
11/B130	11	132.72	3371	133.95	3402.3	21.12
11/B133	11	135.71	3447	136.95	3478.5	21.56
11/B136	11	138.7	3523	139.94	3554.5	22.11
11/B138	11	140.71	3574	141.95	3605.5	22.44
11/B139	11	141.73	3600	142.97	3631.4	22.55
11/B120	11	122.72	3117	123.95	3148.3	19.47
11/B124	11	126.73	3219	127.97	3250.4	20.13
11/B128	11	130.71	3320	131.95	3351.5	20.79
11/B130	11	132.72	3371	133.95	3402.3	21.12
11/B133	11	135.71	3447	136.95	3478.5	21.56
11/B136	11	138.7	3523	139.94	3554.5	22.11
11/B138	11	140.71	3574	141.95	3605.5	22.44
11/B139	11	141.73	3600	142.97	3631.4	22.55
11/B140	11	142.72	3625	143.95	3656.3	22.77
11/B141	11	143.7	3650	144.94	3681.5	22.88
11/B144	11	146.73	3727	147.97	3758.4	23.43
11/B148	11	150.71	3828	151.95	3859.5	24.09

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
11/B150	11	152.72	3879	153.95	3910.3	24.42
11/B154	11	156.73	3981	157.97	4012.4	24.97
11/B158	11	160.71	4082	161.95	4113.5	25.63
11/B160	11	162.72	4133	163.95	4164.3	25.96
11/B162	11	164.72	4184	165.96	4215.4	26.29
11/B168	11	170.71	4336	171.95	4367.5	27.28
11/B173	11	175.71	4463	176.95	4494.5	28.16
11/B180	11	182.72	4641	183.95	4672.3	29.26
11/B185	11	187.72	4768	188.95	4799.3	30.03
11/B190	11	192.72	4895	193.95	4926.3	30.91
11/B195	11	197.72	5022	198.95	5053.3	31.68
11/B210	11	212.72	5403	213.95	5434.3	34.1
11/B218	11	220.71	5606	221.95	5637.5	35.42
11/B225	11	227.72	5784	228.95	5815.3	36.52
11/B240	11	242.72	6165	243.95	6196.3	39.05
11/B255	11	257.72	6546	258.95	6577.3	41.47
11/B270	11	272.72	6927	273.95	6958.3	43.89
11/B300	11	302.72	7689	303.95	7720.3	48.73
11/B315	11	317.72	8070	318.95	8101.3	51.15
12/B35	12	37.72	958	38.95	989.3	6.24
12/B38	12	40.71	1034	41.95	1065.5	6.72
12/B40	12	42.72	1085	43.95	1116.3	7.08
12/B41	12	43.7	1110	44.94	1141.5	7.32
12/B42	12	44.72	1136	45.96	1167.4	7.44
12/B43	12	45.71	1161	46.95	1192.5	7.68
12/B44	12	46.73	1187	47.97	1218.4	7.8
12/B46	12	48.7	1237	49.94	1268.5	8.16
12/B47	12	49.72	1263	50.96	1294.4	8.28
12/B48	12	50.71	1288	51.95	1319.5	8.52
12/B50	12	52.72	1339	53.95	1370.3	8.88
12/B51	12	53.7	1364	54.94	1395.5	9
12/B52	12	54.72	1390	55.96	1421.4	9.24
12/B53	12	55.71	1415	56.95	1446.5	9.36
12/B54	12	56.73	1441	57.97	1472.4	9.6
12/B55	12	57.72	1466	58.95	1497.3	9.72
12/B56	12	58.7	1491	59.94	1522.5	9.96
12/B57	12	59.72	1517	60.96	1548.4	10.08
12/B58	12	60.71	1542	61.95	1573.5	10.32
12/B59	12	61.73	1568	62.97	1599.4	10.44
12/B60	12	62.72	1593	63.95	1624.3	10.68
12/B61	12	63.7	1618	64.94	1649.5	10.8
12/B62	12	64.72	1644	65.96	1675.4	11.04
12/B63	12	65.71	1669	66.95	1700.5	11.16
12/B64	12	66.73	1695	67.97	1726.4	11.4
12/B65	12	67.72	1720	68.95	1751.3	11.52
12/B66	12	68.7	1745	69.94	1776.5	11.64
12/B67	12	69.72	1771	70.96	1802.4	11.88

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
12/B68	12	70.71	1796	71.95	1827.5	12
12/B70	12	72.72	1847	73.95	1878.3	12.36
12/B71	12	73.7	1872	74.94	1903.5	12.6
12/B72	12	74.72	1898	75.96	1929.4	12.72
12/B73	12	75.71	1923	76.95	1954.5	12.96
12/B74	12	76.73	1949	77.97	1980.4	13.08
12/B75	12	77.72	1974	78.95	2005.3	13.32
12/B77	12	79.72	2025	80.96	2056.4	13.68
12/B78	12	80.71	2050	81.95	2081.5	13.8
12/B79	12	81.73	2076	82.97	2107.4	14.04
12/B80	12	82.72	2101	83.95	2132.3	14.16
12/B81	12	83.7	2126	84.94	2157.5	14.4
12/B82	12	84.72	2152	85.96	2183.4	14.52
12/B83	12	85.71	2177	86.95	2208.5	14.76
12/B84	12	86.73	2203	87.97	2234.4	14.88
12/B85	12	87.72	2228	88.95	2259.3	15.12
12/B86	12	88.7	2253	89.94	2284.5	15.24
12/B87	12	89.72	2279	90.96	2310.4	15.48
12/B88	12	90.71	2304	91.95	2335.5	15.6
12/B90	12	92.72	2355	93.95	2386.3	15.96
12/B91	12	93.7	2380	94.94	2411	16.08
12/B92	12	94.72	2406	95.96	2437.4	16.32
12/B93	12	95.71	2431	96.95	2462.5	16.44
12/B95	12	97.72	2482	98.95	2513.3	16.8
12/B96	12	98.7	2507	99.94	2538.5	17.04
12/B97	12	99.72	2533	100.96	2564.4	17.16
12/B99	12	101.73	2584	102.97	2615.4	17.52
12/B100	12	102.72	2609	103.95	2640.3	17.76
12/B103	12	105.71	2685	106.95	2716.5	18.24
12/B104	12	106.73	2711	107.97	2742.4	18.48
12/B105	12	107.72	2736	108.95	2767.3	18.6
12/B108	12	110.71	2812	111.95	2843.5	19.2
12/B109	12	111.73	2838	112.97	2869.4	19.32
12/B110	12	112.72	2863	113.95	2894.3	19.44
12/B112	12	114.72	2914	115.96	2945.4	19.8
12/B113	12	115.71	2939	116.95	2970.5	20.04
12/B114	12	116.73	2965	117.97	2996.4	20.16
12/B115	12	117.72	2990	118.95	3021.3	20.4
12/B116	12	118.7	3015	119.94	3046.5	20.52
12/B118	12	120.71	3066	121.95	3097.5	20.88
12/B120	12	122.72	3117	123.95	3148.3	21.24
12/B124	12	126.73	3219	127.97	3250.4	21.96
12/B128	12	130.71	3320	131.95	3351.5	22.68
12/B130	12	132.72	3371	133.95	3402.3	23.04
12/B133	12	135.71	3447	136.95	3478.5	23.52
12/B136	12	138.7	3523	139.94	3554.5	24.12
12/B138	12	140.71	3574	141.95	3605.5	24.48

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
12/B139	12	141.73	3600	142.97	3631.4	24.6
12/B140	12	142.72	3625	143.95	3656.3	24.84
12/B141	12	143.7	3650	144.94	3681.5	24.96
12/B144	12	146.73	3727	147.97	3758.4	25.56
12/B148	12	150.71	3828	151.95	3859.5	26.28
12/B150	12	152.72	3879	153.95	3910.3	26.64
12/B154	12	156.73	3981	157.97	4012.4	27.24
12/B158	12	160.71	4082	161.95	4113.5	27.96
12/B160	12	162.72	4133	163.95	4164.3	28.32
12/B162	12	164.72	4184	165.96	4215.4	28.68
12/B168	12	170.71	4336	171.95	4367.5	29.76
12/B173	12	175.71	4463	176.95	4494.5	30.72
12/B180	12	182.72	4641	183.95	4672.3	31.92
12/B185	12	187.72	4768	188.95	4799.3	32.76
12/B190	12	192.72	4895	193.95	4926.3	33.72
12/B195	12	197.72	5022	198.95	5053.3	34.56
12/B210	12	212.72	5403	213.95	5434.3	37.2
12/B218	12	220.71	5606	221.95	5637.5	38.64
12/B225	12	227.72	5784	228.95	5815.3	39.84
12/B240	12	242.72	6165	243.95	6196.3	42.6
12/B255	12	257.72	6546	258.95	6577.3	45.24
12/B270	12	272.72	6927	273.95	6958.3	47.88
12/B300	12	302.72	7689	303.95	7720.3	53.16
12/B315	12	317.72	8070	318.95	8101.3	55.8
13/B35	13	37.72	958	38.95	989.3	6.76
13/B38	13	40.71	1034	41.95	1065.5	7.28
13/B40	13	42.72	1085	43.95	1116.3	7.67
13/B41	13	43.7	1110	44.94	1141.5	7.93
13/B42	13	44.72	1136	45.96	1167.4	8.06
13/B43	13	45.71	1161	46.95	1192.5	8.32
13/B44	13	46.73	1187	47.97	1218.4	8.45
13/B46	13	48.7	1237	49.94	1268.5	8.84
13/B47	13	49.72	1263	50.96	1294.4	8.97
13/B48	13	50.71	1288	51.95	1319.5	9.23
13/B50	13	52.72	1339	53.95	1370.3	9.62
13/B51	13	53.7	1364	54.94	1395.5	9.75
13/B52	13	54.72	1390	55.96	1421.4	10.01
13/B53	13	55.71	1415	56.95	1446.5	10.14
13/B54	13	56.73	1441	57.97	1472.4	10.4
13/B55	13	57.72	1466	58.95	1497.3	10.53
13/B56	13	58.7	1491	59.94	1522.5	10.79
13/B57	13	59.72	1517	60.96	1548.4	10.92
13/B58	13	60.71	1542	61.95	1573.5	11.18
13/B59	13	61.73	1568	62.97	1599.4	11.31
13/B60	13	62.72	1593	63.95	1624.3	11.57
13/B61	13	63.7	1618	64.94	1649.5	11.7
13/B62	13	64.72	1644	65.96	1675.4	11.96

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
13/B63	13	65.71	1669	66.95	1700.5	12.09
13/B64	13	66.73	1695	67.97	1726.4	12.35
13/B65	13	67.72	1720	68.95	1751.3	12.48
13/B66	13	68.7	1745	69.94	1776.5	12.61
13/B67	13	69.72	1771	70.96	1802.4	12.87
13/B68	13	70.71	1796	71.95	1827.5	13
13/B70	13	72.72	1847	73.95	1878.3	13.39
13/B71	13	73.7	1872	74.94	1903.5	13.65
13/B72	13	74.72	1898	75.96	1929.4	13.78
13/B73	13	75.71	1923	76.95	1954.5	14.04
13/B74	13	76.73	1949	77.97	1980.4	14.17
13/B75	13	77.72	1974	78.95	2005.3	14.43
13/B77	13	79.72	2025	80.96	2056.4	14.82
13/B78	13	80.71	2050	81.95	2081.5	14.95
13/B79	13	81.73	2076	82.97	2107.4	15.21
13/B80	13	82.72	2101	83.95	2132.3	15.34
13/B81	13	83.7	2126	84.94	2157.5	15.6
13/B82	13	84.72	2152	85.96	2183.4	15.73
13/B83	13	85.71	2177	86.95	2208.5	15.99
13/B84	13	86.73	2203	87.97	2234.4	16.12
13/B85	13	87.72	2228	88.95	2259.3	16.38
13/B86	13	88.7	2253	89.94	2284.5	16.51
13/B87	13	89.72	2279	90.96	2310.4	16.77
13/B88	13	90.71	2304	91.95	2335.5	16.9
13/B90	13	92.72	2355	93.95	2386.3	17.29
13/B92	13	94.72	2406	95.96	2437.4	17.68
13/B93	13	95.71	2431	96.95	2462.5	17.81
13/B95	13	97.72	2482	98.95	2513.3	18.2
13/B96	13	98.7	2507	99.94	2538.5	18.46
13/B97	13	99.72	2533	100.96	2564.4	18.59
13/B99	13	101.73	2584	102.97	2615.4	18.98
13/B100	13	102.72	2609	103.95	2640.3	19.24
13/B103	13	105.71	2685	106.95	2716.5	19.76
13/B104	13	106.73	2711	107.97	2742.4	20.02
13/B105	13	107.72	2736	108.95	2767.3	20.15
13/B108	13	110.71	2812	111.95	2843.5	20.8
13/B109	13	111.73	2838	112.97	2869.4	20.93
13/B110	13	112.72	2863	113.95	2894.3	21.06
13/B112	13	114.72	2914	115.96	2945.4	21.45
13/B113	13	115.71	2939	116.95	2970.5	21.71
13/B114	13	116.73	2965	117.97	2996.4	21.84
13/B115	13	117.72	2990	118.95	3021.3	22.1
13/B116	13	118.7	3015	119.94	3046.5	22.23
13/B118	13	120.71	3066	121.95	3097.5	22.62
13/B120	13	122.72	3117	123.95	3148.3	23.01
13/B124	13	126.73	3219	127.97	3250.4	23.79
13/B128	13	130.71	3320	131.95	3351.5	24.57

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
13/B130	13	132.72	3371	133.95	3402.3	24.96
13/B133	13	135.71	3447	136.95	3478.5	25.48
13/B136	13	138.7	3523	139.94	3554.5	26.13
13/B138	13	140.71	3574	141.95	3605.5	26.52
13/B139	13	141.73	3600	142.97	3631.4	26.65
13/B141	13	143.7	3650	144.94	3681.5	27.04
13/B144	13	146.73	3727	147.97	3758.4	27.69
13/B148	13	150.71	3828	151.95	3859.5	28.47
13/B150	13	152.72	3879	153.95	3910.3	28.86
13/B154	13	156.73	3981	157.97	4012.4	29.51
13/B158	13	160.71	4082	161.95	4113.5	30.29
13/B160	13	162.72	4133	163.95	4164.3	30.68
13/B162	13	164.72	4184	165.96	4215.4	31.07
13/B168	13	170.71	4336	171.95	4367.5	32.24
13/B173	13	175.71	4463	176.95	4494.5	33.28
13/B180	13	182.72	4641	183.95	4672.3	34.58
13/B185	13	187.72	4768	188.95	4799.3	35.49
13/B190	13	192.72	4895	193.95	4926.3	36.53
13/B195	13	197.72	5022	198.95	5053.3	37.44
13/B210	13	212.72	5403	213.95	5434.3	40.3
13/B218	13	220.71	5606	221.95	5637.5	41.86
13/B225	13	227.72	5784	228.95	5815.3	43.16
13/B240	13	242.72	6165	243.95	6196.3	46.15
13/B255	13	257.72	6546	258.95	6577.3	49.01
13/B270	13	272.72	6927	273.95	6958.3	51.87
13/B300	13	302.72	7689	303.95	7720.3	57.59
13/B315	13	317.72	8070	318.95	8101.3	60.45
14/B35	14	37.72	958	38.95	989.3	7.28
14/B38	14	40.71	1034	41.95	1065.5	7.84
14/B40	14	42.72	1085	43.95	1116.3	8.26
14/B41	14	43.7	1110	44.94	1141.5	8.54
14/B42	14	44.72	1136	45.96	1167.4	8.68
14/B43	14	45.71	1161	46.95	1192.5	8.96
14/B44	14	46.73	1187	47.97	1218.4	9.1
14/B46	14	48.7	1237	49.94	1268.5	9.52
14/B47	14	49.72	1263	50.96	1294.4	9.66
14/B48	14	50.71	1288	51.95	1319.5	9.94
14/B50	14	52.72	1339	53.95	1370.3	10.36
14/B51	14	53.7	1364	54.94	1395.5	10.5
14/B52	14	54.72	1390	55.96	1421.4	10.78
14/B53	14	55.71	1415	56.95	1446.5	10.92
14/B54	14	56.73	1441	57.97	1472.4	11.2
14/B55	14	57.72	1466	58.95	1497.3	11.34
14/B56	14	58.7	1491	59.94	1522.5	11.62
14/B57	14	59.72	1517	60.96	1548.4	11.76
14/B58	14	60.71	1542	61.95	1573.5	12.04
14/B59	14	61.73	1568	62.97	1599.4	12.18

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
14/B60	14	62.72	1593	63.95	1624.3	12.46
14/B61	14	63.7	1618	64.94	1649.5	12.6
14/B62	14	64.72	1644	65.96	1675.4	12.88
14/B63	14	65.71	1669	66.95	1700.5	13.02
14/B64	14	66.73	1695	67.97	1726.4	13.3
14/B65	14	67.72	1720	68.95	1751.3	13.44
14/B66	14	68.7	1745	69.94	1776.5	13.58
14/B67	14	69.72	1771	70.96	1802.4	13.86
14/B68	14	70.71	1796	71.95	1827.5	14
14/B70	14	72.72	1847	73.95	1878.3	14.42
14/B71	14	73.7	1872	74.94	1903.5	14.7
14/B72	14	74.72	1898	75.96	1929.4	14.84
14/B73	14	75.71	1923	76.95	1954.5	15.12
14/B74	14	76.73	1949	77.97	1980.4	15.26
14/B75	14	77.72	1974	78.95	2005.3	15.54
14/B77	14	79.72	2025	80.96	2056.4	15.96
14/B78	14	80.71	2050	81.95	2081.5	16.1
14/B79	14	81.73	2076	82.97	2107.4	16.38
14/B80	14	82.72	2101	83.95	2132.3	16.52
14/B81	14	83.7	2126	84.94	2157.5	16.8
14/B82	14	84.72	2152	85.96	2183.4	16.94
14/B83	14	85.71	2177	86.95	2208.5	17.22
14/B84	14	86.73	2203	87.97	2234.4	17.36
14/B85	14	87.72	2228	88.95	2259.3	17.64
14/B86	14	88.7	2253	89.94	2284.5	17.78
14/B87	14	89.72	2279	90.96	2310.4	18.06
14/B88	14	90.71	2304	91.95	2335.5	18.2
14/B90	14	92.72	2355	93.95	2386.3	18.62
14/B92	14	94.72	2406	95.96	2437.4	19.04
14/B93	14	95.71	2431	96.95	2462.5	19.18
14/B95	14	97.72	2482	98.95	2513.3	19.6
14/B96	14	98.7	2507	99.94	2538.5	19.88
14/B97	14	99.72	2533	100.96	2564.4	20.02
14/B99	14	101.73	2584	102.97	2615.4	20.44
14/B100	14	102.72	2609	103.95	2640.3	20.72
14/B103	14	105.71	2685	106.95	2716.5	21.28
14/B104	14	106.73	2711	107.97	2742.4	21.56
14/B105	14	107.72	2736	108.95	2767.3	21.7
14/B108	14	110.71	2812	111.95	2843.5	22.4
14/B109	14	111.73	2838	112.97	2869.4	22.54
14/B110	14	112.72	2863	113.95	2894.3	22.68
14/B112	14	114.72	2914	115.96	2945.4	23.1
14/B113	14	115.71	2939	116.95	2970.5	23.38
14/B114	14	116.73	2965	117.97	2996.4	23.52
14/B115	14	117.72	2990	118.95	3021.3	23.8
14/B116	14	118.7	3015	119.94	3046.5	23.94
14/B118	14	120.71	3066	121.95	3097.5	24.36

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
14/B120	14	122.72	3117	123.95	3148.3	24.78
14/B124	14	126.73	3219	127.97	3250.4	25.62
14/B128	14	130.71	3320	131.95	3351.5	26.46
14/B130	14	132.72	3371	133.95	3402.3	26.88
14/B133	14	135.71	3447	136.95	3478.5	27.44
14/B136	14	138.7	3523	139.94	3554.5	28.14
14/B138	14	140.71	3574	141.95	3605.5	28.56
14/B139	14	141.73	3600	142.97	3631.4	28.7
14/B141	14	143.7	3650	144.94	3681.5	29.12
14/B144	14	146.73	3727	147.97	3758.4	29.82
14/B148	14	150.71	3828	151.95	3859.5	30.66
14/B150	14	152.72	3879	153.95	3910.3	31.08
14/B154	14	156.73	3981	157.97	4012.4	31.78
14/B158	14	160.71	4082	161.95	4113.5	32.62
14/B160	14	162.72	4133	163.95	4164.3	33.04
14/B162	14	164.72	4184	165.96	4215.4	33.46
14/B168	14	170.71	4336	171.95	4367.5	34.72
14/B173	14	175.71	4463	176.95	4494.5	35.84
14/B180	14	182.72	4641	183.95	4672.3	37.24
14/B185	14	187.72	4768	188.95	4799.3	38.22
14/B190	14	192.72	4895	193.95	4926.3	39.34
14/B195	14	197.72	5022	198.95	5053.3	40.32
14/B210	14	212.72	5403	213.95	5434.3	43.4
14/B218	14	220.71	5606	221.95	5637.5	45.08
14/B225	14	227.72	5784	228.95	5815.3	46.48
14/B240	14	242.72	6165	243.95	6196.3	49.7
14/B255	14	257.72	6546	258.95	6577.3	52.78
14/B270	14	272.72	6927	273.95	6958.3	55.86
14/B300	14	302.72	7689	303.95	7720.3	62.02
14/B315	14	317.72	8070	318.95	8101.3	65.1
15/B35	15	37.72	958	38.95	989.3	7.8
15/B38	15	40.71	1034	41.95	1065.5	8.4
15/B40	15	42.72	1085	43.95	1116.3	8.85
15/B41	15	43.7	1110	44.94	1141.5	9.15
15/B42	15	44.72	1136	45.96	1167.4	9.3
15/B43	15	45.71	1161	46.95	1192.5	9.6
15/B44	15	46.73	1187	47.97	1218.4	9.75
15/B46	15	48.7	1237	49.94	1268.5	10.2
15/B47	15	49.72	1263	50.96	1294.4	10.35
15/B48	15	50.71	1288	51.95	1319.5	10.65
15/B50	15	52.72	1339	53.95	1370.3	11.1
15/B51	15	53.7	1364	54.94	1395.5	11.25
15/B52	15	54.72	1390	55.96	1421.4	11.55
15/B53	15	55.71	1415	56.95	1446.5	11.7
15/B54	15	56.73	1441	57.97	1472.4	12

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
15/B55	15	57.72	1466	58.95	1497.3	12.15
15/B56	15	58.7	1491	59.94	1522.5	12.45
15/B57	15	59.72	1517	60.96	1548.4	12.6
15/B58	15	60.71	1542	61.95	1573.5	12.9
15/B59	15	61.73	1568	62.97	1599.4	13.05
15/B60	15	62.72	1593	63.95	1624.3	13.35
15/B61	15	63.7	1618	64.94	1649.5	13.5
15/B62	15	64.72	1644	65.96	1675.4	13.8
15/B63	15	65.71	1669	66.95	1700.5	13.95
15/B64	15	66.73	1695	67.97	1726.4	14.25
15/B65	15	67.72	1720	68.95	1751.3	14.4
15/B66	15	68.7	1745	69.94	1776.5	14.55
15/B67	15	69.72	1771	70.96	1802.4	14.85
15/B68	15	70.71	1796	71.95	1827.5	15
15/B70	15	72.72	1847	73.95	1878.3	15.45
15/B71	15	73.7	1872	74.94	1903.5	15.75
15/B72	15	74.72	1898	75.96	1929.4	15.9
15/B73	15	75.71	1923	76.95	1954.5	16.2
15/B74	15	76.73	1949	77.97	1980.4	16.35
15/B75	15	77.72	1974	78.95	2005.3	16.65
15/B77	15	79.72	2025	80.96	2056.4	17.1
15/B78	15	80.71	2050	81.95	2081.5	17.25
15/B79	15	81.73	2076	82.97	2107.4	17.55
15/B80	15	82.72	2101	83.95	2132.3	17.7
15/B81	15	83.7	2126	84.94	2157.5	18
15/B82	15	84.72	2152	85.96	2183.4	18.15
15/B83	15	85.71	2177	86.95	2208.5	18.45
15/B84	15	86.73	2203	87.97	2234.4	18.6
15/B85	15	87.72	2228	88.95	2259.3	18.9
15/B86	15	88.7	2253	89.94	2284.5	19.05
15/B87	15	89.72	2279	90.96	2310.4	19.35
15/B88	15	90.71	2304	91.95	2335.5	19.5
15/B90	15	92.72	2355	93.95	2386.3	19.95
15/B92	15	94.72	2406	95.96	2437.4	20.4
15/B93	15	95.71	2431	96.95	2462.5	20.55
15/B95	15	97.72	2482	98.95	2513.3	21
15/B96	15	98.7	2507	99.94	2538.5	21.3
15/B97	15	99.72	2533	100.96	2564.4	21.45
15/B99	15	101.73	2584	102.97	2615.4	21.9
15/B100	15	102.72	2609	103.95	2640.3	22.2
15/B103	15	105.71	2685	106.95	2716.5	22.8
15/B104	15	106.73	2711	107.97	2742.4	23.1
15/B105	15	107.72	2736	108.95	2767.3	23.25
15/B108	15	110.71	2812	111.95	2843.5	24
15/B109	15	111.73	2838	112.97	2869.4	24.15
15/B110	15	112.72	2863	113.95	2894.3	24.3
15/B112	15	114.72	2914	115.96	2945.4	24.75

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
15/B113	15	115.71	2939	116.95	2970.5	25.05
15/B114	15	116.73	2965	117.97	2996.4	25.2
15/B115	15	117.72	2990	118.95	3021.3	25.5
15/B116	15	118.7	3015	119.94	3046.5	25.65
15/B118	15	120.71	3066	121.95	3097.5	26.1
15/B120	15	122.72	3117	123.95	3148.3	26.55
15/B124	15	126.73	3219	127.97	3250.4	27.45
15/B128	15	130.71	3320	131.95	3351.5	28.35
15/B130	15	132.72	3371	133.95	3402.3	28.8
15/B133	15	135.71	3447	136.95	3478.5	29.4
15/B136	15	138.7	3523	139.94	3554.5	30.15
15/B138	15	140.71	3574	141.95	3605.5	30.6
15/B139	15	141.73	3600	142.97	3631.4	30.75
15/B141	15	143.7	3650	144.94	3681.5	31.2
15/B144	15	146.73	3727	147.97	3758.4	31.95
15/B148	15	150.71	3828	151.95	3859.5	32.85
15/B150	15	152.72	3879	153.95	3910.3	33.3
15/B154	15	156.73	3981	157.97	4012.4	34.05
15/B158	15	160.71	4082	161.95	4113.5	34.95
15/B160	15	162.72	4133	163.95	4164.3	35.4
15/B162	15	164.72	4184	165.96	4215.4	35.85
15/B168	15	170.71	4336	171.95	4367.5	37.2
15/B173	15	175.71	4463	176.95	4494.5	38.4
15/B180	15	182.72	4641	183.95	4672.3	39.9
15/B185	15	187.72	4768	188.95	4799.3	40.95
15/B190	15	192.72	4895	193.95	4926.3	42.15
15/B195	15	197.72	5022	198.95	5053.3	43.2
15/B210	15	212.72	5403	213.95	5434.3	46.5
15/B218	15	220.71	5606	221.95	5637.5	48.3
15/B225	15	227.72	5784	228.95	5815.3	49.8
15/B240	15	242.72	6165	243.95	6196.3	53.25
15/B255	15	257.72	6546	258.95	6577.3	56.55
15/B270	15	272.72	6927	273.95	6958.3	59.85
15/B300	15	302.72	7689	303.95	7720.3	66.45
15/B315	15	317.72	8070	318.95	8101.3	69.75
16/B35	16	37.72	958	38.95	989.3	8.32
16/B38	16	40.71	1034	41.95	1065.5	8.96
16/B40	16	42.72	1085	43.95	1116.3	9.44
16/B41	16	43.7	1110	44.94	1141.5	9.76
16/B42	16	44.72	1136	45.96	1167.4	9.92
15/B185	15	187.72	4768	188.95	4799.3	40.95
15/B190	15	192.72	4895	193.95	4926.3	42.15
15/B195	15	197.72	5022	198.95	5053.3	43.2
15/B210	15	212.72	5403	213.95	5434.3	46.5
15/B218	15	220.71	5606	221.95	5637.5	48.3
15/B225	15	227.72	5784	228.95	5815.3	49.8
15/B240	15	242.72	6165	243.95	6196.3	53.25

BANDED CLASSIC WRAPPED V-BELTS



B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
15/B255	15	257.72	6546	258.95	6577.3	56.55
15/B270	15	272.72	6927	273.95	6958.3	59.85
15/B300	15	302.72	7689	303.95	7720.3	66.45
15/B315	15	317.72	8070	318.95	8101.3	69.75
16/B35	16	37.72	958	38.95	989.3	8.32
16/B38	16	40.71	1034	41.95	1065.5	8.96
16/B40	16	42.72	1085	43.95	1116.3	9.44
16/B41	16	43.7	1110	44.94	1141.5	9.76
16/B42	16	44.72	1136	45.96	1167.4	9.92
16/B43	16	45.71	1161	46.95	1192.5	10.24
16/B44	16	46.73	1187	47.97	1218.4	10.4
16/B46	16	48.7	1237	49.94	1268.5	10.88
16/B47	16	49.72	1263	50.96	1294.4	11.04
16/B48	16	50.71	1288	51.95	1319.5	11.36
16/B50	16	52.72	1339	53.95	1370.3	11.84
16/B51	16	53.7	1364	54.94	1395.5	12
16/B52	16	54.72	1390	55.96	1421.4	12.32
16/B53	16	55.71	1415	56.95	1446.5	12.48
16/B54	16	56.73	1441	57.97	1472.4	12.8
16/B55	16	57.72	1466	58.95	1497.3	12.96
16/B56	16	58.7	1491	59.94	1522.5	13.28
16/B57	16	59.72	1517	60.96	1548.4	13.44
16/B58	16	60.71	1542	61.95	1573.5	13.76
16/B59	16	61.73	1568	62.97	1599.4	13.92
16/B60	16	62.72	1593	63.95	1624.3	14.24
16/B61	16	63.7	1618	64.94	1649.5	14.4
16/B62	16	64.72	1644	65.96	1675.4	14.72
16/B63	16	65.71	1669	66.95	1700.5	14.88
16/B64	16	66.73	1695	67.97	1726.4	15.2
16/B65	16	67.72	1720	68.95	1751.3	15.36
16/B66	16	68.7	1745	69.94	1776.5	15.52
16/B67	16	69.72	1771	70.96	1802.4	15.84
16/B68	16	70.71	1796	71.95	1827.5	16
16/B70	16	72.72	1847	73.95	1878.3	16.48
16/B71	16	73.7	1872	74.94	1903.5	16.8
16/B72	16	74.72	1898	75.96	1929.4	16.96
16/B73	16	75.71	1923	76.95	1954.5	17.28
16/B74	16	76.73	1949	77.97	1980.4	17.44
16/B75	16	77.72	1974	78.95	2005.3	17.76
16/B77	16	79.72	2025	80.96	2056.4	18.24
16/B78	16	80.71	2050	81.95	2081.5	18.4
16/B79	16	81.73	2076	82.97	2107.4	18.72
16/B80	16	82.72	2101	83.95	2132.3	18.88
16/B81	16	83.7	2126	84.94	2157.5	19.2
16/B82	16	84.72	2152	85.96	2183.4	19.36
16/B83	16	85.71	2177	86.95	2208.5	19.68
16/B84	16	86.73	2203	87.97	2234.4	19.84

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
16/B85	16	87.72	2228	88.95	2259.3	20.16
16/B86	16	88.7	2253	89.94	2284.5	20.32
16/B87	16	89.72	2279	90.96	2310.4	20.64
16/B88	16	90.71	2304	91.95	2335.5	20.8
16/B90	16	92.72	2355	93.95	2386.3	21.28
16/B92	16	94.72	2406	95.96	2437.4	21.76
16/B93	16	95.71	2431	96.95	2462.5	21.92
16/B95	16	97.72	2482	98.95	2513.3	22.4
16/B96	16	98.7	2507	99.94	2538.5	22.72
16/B97	16	99.72	2533	100.96	2564.4	22.88
16/B92	16	94.72	2406	95.96	2437.4	21.76
16/B93	16	95.71	2431	96.95	2462.5	21.92
16/B95	16	97.72	2482	98.95	2513.3	22.4
16/B96	16	98.7	2507	99.94	2538.5	22.72
16/B97	16	99.72	2533	100.96	2564.4	22.88
16/B92	16	94.72	2406	95.96	2437.4	21.76
16/B93	16	95.71	2431	96.95	2462.5	21.92
16/B95	16	97.72	2482	98.95	2513.3	22.4
16/B96	16	98.7	2507	99.94	2538.5	22.72
16/B97	16	99.72	2533	100.96	2564.4	22.88
16/B99	16	101.73	2584	102.97	2615.4	23.36
16/B100	16	102.72	2609	103.95	2640.3	23.68
16/B103	16	105.71	2685	106.95	2716.5	24.32
16/B104	16	106.73	2711	107.97	2742.4	24.64
16/B105	16	107.72	2736	108.95	2767.3	24.8
16/B108	16	110.71	2812	111.95	2843.5	25.6
16/B109	16	111.73	2838	112.97	2869.4	25.76
16/B110	16	112.72	2863	113.95	2894.3	25.92
16/B112	16	114.72	2914	115.96	2945.4	26.4
16/B113	16	115.71	2939	116.95	2970.5	26.72
16/B114	16	116.73	2965	117.97	2996.4	26.88
16/B115	16	117.72	2990	118.95	3021.3	27.2
16/B116	16	118.7	3015	119.94	3046.5	27.36
16/B118	16	120.71	3066	121.95	3097.5	27.84
16/B120	16	122.72	3117	123.95	3148.3	28.32
16/B124	16	126.73	3219	127.97	3250.4	29.28
16/B128	16	130.71	3320	131.95	3351.5	30.24
16/B130	16	132.72	3371	133.95	3402.3	30.72
16/B133	16	135.71	3447	136.95	3478.5	31.36
16/B136	16	138.7	3523	139.94	3554.5	32.16
16/B138	16	140.71	3574	141.95	3605.5	32.64
16/B139	16	141.73	3600	142.97	3631.4	32.8
16/B141	16	143.7	3650	144.94	3681.5	33.28
16/B144	16	146.73	3727	147.97	3758.4	34.08
16/B148	16	150.71	3828	151.95	3859.5	35.04
16/B150	16	152.72	3879	153.95	3910.3	35.52
16/B154	16	156.73	3981	157.97	4012.4	36.32


BANDED CLASSIC WRAPPED V-BELTS

B continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
16/B158	16	160.71	4082	161.95	4113.5	37.28
16/B160	16	162.72	4133	163.95	4164.3	37.76
16/B162	16	164.72	4184	165.96	4215.4	38.24
16/B168	16	170.71	4336	171.95	4367.5	39.68
16/B173	16	175.71	4463	176.95	4494.5	40.96
16/B180	16	182.72	4641	183.95	4672.3	42.56
16/B185	16	187.72	4768	188.95	4799.3	43.68
16/B190	16	192.72	4895	193.95	4926.3	44.96
16/B195	16	197.72	5022	198.95	5053.3	46.08
16/B210	16	212.72	5403	213.95	5434.3	49.6
16/B218	16	220.71	5606	221.95	5637.5	51.52
16/B225	16	227.72	5784	228.95	5815.3	53.12
16/B240	16	242.72	6165	243.95	6196.3	56.8
16/B255	16	257.72	6546	258.95	6577.3	60.32
16/B270	16	272.72	6927	273.95	6958.3	63.84
16/B300	16	302.72	7689	303.95	7720.3	70.88
16/B315	16	317.72	8070	318.95	8101.3	74.4

BELT PART NUMBER NOMENCLATURE

Belt No: 2/C100
 2/ - Number of Ribs
 C - Profile
 100 - Inside Circumference (In)



C

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
2/C126	2	129.45	3288	130.56	3316.2	6.12
2/C128	2	131.46	3339	132.57	3367.3	6.2
2/C136	2	139.45	3542	140.56	3570.2	6.6
2/C144	2	147.48	3746	148.59	3774.2	6.98
2/C146	2	149.45	3796	150.56	3824.2	7.08
2/C151	2	154.45	3923	155.56	3951.2	7.32
2/C158	2	161.46	4101	162.57	4129.3	7.66
2/C162	2	165.47	4203	166.59	4231.4	7.86
2/C173	2	176.46	4482	177.57	4510.3	8.4
2/C180	2	183.46	4660	184.58	4688.3	8.74
2/C185	2	188.46	4787	189.58	4815.3	8.98
2/C190	2	193.46	4914	194.58	4942.3	9.22
2/C195	2	198.46	5041	199.58	5069.3	9.46
2/C204	2	207.48	5270	208.59	5298.2	9.9
2/C210	2	213.46	5422	214.58	5450.3	10.18
2/C225	2	228.46	5803	229.58	5831.3	10.92
2/C240	2	243.46	6184	244.58	6212.3	11.64
2/C255	2	258.46	6565	259.58	6593.3	12.36

C

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
2/C270	2	273.46	6946	274.58	6974.3	13.1
2/C285	2	288.46	7327	289.58	7355.3	13.82
2/C300	2	303.46	7708	304.58	7736.3	14.56
2/C315	2	318.46	8089	319.58	8117.3	15.28
2/C330	2	333.46	8470	334.58	8498.3	16
2/C345	2	348.46	8851	349.58	8879.3	16.74
2/C360	2	363.46	9232	364.58	9260.3	17.46
2/C390	2	393.46	9994	394.58	10022.3	18.92
2/C420	2	423.46	10756	424.58	10784.3	20.38
3/C60	3	63.46	1612	64.58	1640.3	4.38
3/C68	3	71.46	1815	72.57	1843.3	4.95
3/C72	3	75.47	1917	76.59	1945.4	5.25
3/C75	3	78.46	1993	79.58	2021.3	5.46
3/C78	3	81.46	2069	82.57	2097.3	5.67
3/C80	3	83.46	2120	84.58	2148.3	5.82
3/C81	3	84.45	2145	85.56	2173.2	5.88
3/C85	3	88.46	2247	89.58	2275.3	6.18
3/C87	3	90.47	2298	91.59	2326.4	6.33
3/C90	3	93.46	2374	94.58	2402.3	6.54
3/C96	3	99.45	2526	100.56	2554.2	6.99
3/C99	3	102.48	2603	103.59	2631.2	7.2
3/C100	3	103.46	2628	104.58	2656.3	7.29
3/C103	3	106.46	2704	107.57	2732.3	7.5
3/C105	3	108.46	2755	109.58	2783.3	7.65
3/C108	3	111.46	2831	112.57	2859.3	7.86
3/C109	3	112.48	2857	113.59	2885.2	7.92
3/C112	3	115.47	2933	116.59	2961.4	8.16
3/C103	3	106.46	2704	107.57	2732.3	7.5
3/C105	3	108.46	2755	109.58	2783.3	7.65
3/C108	3	111.46	2831	112.57	2859.3	7.86
3/C109	3	112.48	2857	113.59	2885.2	7.92
3/C112	3	115.47	2933	116.59	2961.4	8.16
3/C103	3	106.46	2704	107.57	2732.3	7.5
3/C105	3	108.46	2755	109.58	2783.3	7.65
3/C108	3	111.46	2831	112.57	2859.3	7.86
3/C109	3	112.48	2857	113.59	2885.2	7.92
3/C112	3	115.47	2933	116.59	2961.4	8.16
3/C120	3	123.46	3136	124.58	3164.3	8.73
3/C124	3	127.48	3238	128.59	3266.2	9.03
3/C126	3	129.45	3288	130.56	3316.2	9.18
3/C128	3	131.46	3339	132.57	3367.3	9.3
3/C136	3	139.45	3542	140.56	3570.2	9.9
3/C144	3	147.48	3746	148.59	3774.2	10.47
3/C146	3	149.45	3796	150.56	3824.2	10.62
3/C151	3	154.45	3923	155.56	3951.2	10.98
3/C158	3	161.46	4101	162.57	4129.3	11.49
3/C162	3	165.47	4203	166.59	4231.4	11.79

BANDED CLASSIC WRAPPED V-BELTS



C continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3/C173	3	176.46	4482	177.57	4510.3	12.6
3/C180	3	183.46	4660	184.58	4688.3	13.11
3/C185	3	188.46	4787	189.58	4815.3	13.47
3/C190	3	193.46	4914	194.58	4942.3	13.83
3/C195	3	198.46	5041	199.58	5069.3	14.19
3/C204	3	207.48	5270	208.59	5298.2	14.85
3/C210	3	213.46	5422	214.58	5450.3	15.27
3/C225	3	228.46	5803	229.58	5831.3	16.38
3/C240	3	243.46	6184	244.58	6212.3	17.46
3/C255	3	258.46	6565	259.58	6593.3	18.54
3/C270	3	273.46	6946	274.58	6974.3	19.65
3/C285	3	288.46	7327	289.58	7355.3	20.73
3/C300	3	303.46	7708	304.58	7736.3	21.84
3/C315	3	318.46	8089	319.58	8117.3	22.92
3/C330	3	333.46	8470	334.58	8498.3	24
3/C345	3	348.46	8851	349.58	8879.3	25.11
3/C360	3	363.46	9232	364.58	9260.3	26.19
3/C390	3	393.46	9994	394.58	10022.3	28.38
3/C420	3	423.46	10756	424.58	10784.3	30.57
4/C60	4	63.46	1612	64.58	1640.3	5.84
4/C68	4	71.46	1815	72.57	1843.3	6.6
4/C72	4	75.47	1917	76.59	1945.4	7
4/C75	4	78.46	1993	79.58	2021.3	7.28
4/C78	4	81.46	2069	82.57	2097.3	7.56
4/C80	4	83.46	2120	84.58	2148.3	7.76
4/C81	4	84.45	2145	85.56	2173.2	7.84
4/C85	4	88.46	2247	89.58	2275.3	8.24
4/C87	4	90.47	2298	91.59	2326.4	8.44
4/C90	4	93.46	2374	94.58	2402.3	8.72
4/C96	4	99.45	2526	100.56	2554.2	9.32
4/C99	4	102.48	2603	103.59	2631.2	9.6
4/C100	4	103.46	2628	104.58	2656.3	9.72
4/C103	4	106.46	2704	107.57	2732.3	10
4/C105	4	108.46	2755	109.58	2783.3	10.2
4/C108	4	111.46	2831	112.57	2859.3	10.48
4/C109	4	112.48	2857	113.59	2885.2	10.56
4/C112	4	115.47	2933	116.59	2961.4	10.88
4/C120	4	123.46	3136	124.58	3164.3	11.64
4/C124	4	127.48	3238	128.59	3266.2	12.04
4/C126	4	129.45	3288	130.56	3316.2	12.24
4/C128	4	131.46	3339	132.57	3367.3	12.4
4/C136	4	139.45	3542	140.56	3570.2	13.2
4/C144	4	147.48	3746	148.59	3774.2	13.96
4/C146	4	149.45	3796	150.56	3824.2	14.16
4/C151	4	154.45	3923	155.56	3951.2	14.64
4/C158	4	161.46	4101	162.57	4129.3	15.32
4/C162	4	165.47	4203	166.59	4231.4	15.72

C continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
4/C173	4	176.46	4482	177.57	4510.3	16.8
4/C180	4	183.46	4660	184.58	4688.3	17.48
4/C185	4	188.46	4787	189.58	4815.3	17.96
4/C190	4	193.46	4914	194.58	4942.3	18.44
4/C195	4	198.46	5041	199.58	5069.3	18.92
4/C204	4	207.48	5270	208.59	5298.2	19.8
4/C210	4	213.46	5422	214.58	5450.3	20.36
4/C225	4	228.46	5803	229.58	5831.3	21.84
4/C240	4	243.46	6184	244.58	6212.3	23.28
4/C255	4	258.46	6565	259.58	6593.3	24.72
4/C270	4	273.46	6946	274.58	6974.3	26.2
4/C285	4	288.46	7327	289.58	7355.3	27.64
4/C300	4	303.46	7708	304.58	7736.3	29.12
4/C315	4	318.46	8089	319.58	8117.3	30.56
4/C330	4	333.46	8470	334.58	8498.3	32
4/C345	4	348.46	8851	349.58	8879.3	33.48
4/C360	4	363.46	9232	364.58	9260.3	34.92
4/C390	4	393.46	9994	394.58	10022.3	37.84
4/C420	4	423.46	10756	424.58	10784.3	40.76
5/C60	5	63.46	1612	64.58	1640.3	7.3
5/C68	5	71.46	1815	72.57	1843.3	8.25
5/C72	5	75.47	1917	76.59	1945.4	8.75
5/C75	5	78.46	1993	79.58	2021.3	9.1
5/C78	5	81.46	2069	82.57	2097.3	9.45
5/C80	5	83.46	2120	84.58	2148.3	9.7
5/C81	5	84.45	2145	85.56	2173.2	9.8
5/C85	5	88.46	2247	89.58	2275.3	10.3
5/C87	5	90.47	2298	91.59	2326.4	10.55
5/C90	5	93.46	2374	94.58	2402.3	10.9
5/C96	5	99.45	2526	100.56	2554.2	11.65
5/C99	5	102.48	2603	103.59	2631.2	12
5/C100	5	103.46	2628	104.58	2656.3	12.15
5/C103	5	106.46	2704	107.57	2732.3	12.5
5/C105	5	108.46	2755	109.58	2783.3	12.75
5/C108	5	111.46	2831	112.57	2859.3	13.1
5/C109	5	112.48	2857	113.59	2885.2	13.2
5/C112	5	115.47	2933	116.59	2961.4	13.6
5/C120	5	123.46	3136	124.58	3164.3	14.55
5/C124	5	127.48	3238	128.59	3266.2	15.05
5/C126	5	129.45	3288	130.56	3316.2	15.3
5/C128	5	131.46	3339	132.57	3367.3	15.5
5/C136	5	139.45	3542	140.56	3570.2	16.5
5/C144	5	147.48	3746	148.59	3774.2	17.45
5/C146	5	149.45	3796	150.56	3824.2	17.7
5/C151	5	154.45	3923	155.56	3951.2	18.3
5/C158	5	161.46	4101	162.57	4129.3	19.15
5/C162	5	165.47	4203	166.59	4231.4	19.65

BANDED CLASSIC WRAPPED V-BELTS



C continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
5/C173	5	176.46	4482	177.57	4510.3	21
5/C180	5	183.46	4660	184.58	4688.3	21.85
5/C185	5	188.46	4787	189.58	4815.3	22.45
5/C190	5	193.46	4914	194.58	4942.3	23.05
5/C195	5	198.46	5041	199.58	5069.3	23.65
5/C204	5	207.48	5270	208.59	5298.2	24.75
5/C210	5	213.46	5422	214.58	5450.3	25.45
5/C225	5	228.46	5803	229.58	5831.3	27.3
5/C240	5	243.46	6184	244.58	6212.3	29.1
5/C255	5	258.46	6565	259.58	6593.3	30.9
5/C270	5	273.46	6946	274.58	6974.3	32.75
5/C285	5	288.46	7327	289.58	7355.3	34.55
5/C300	5	303.46	7708	304.58	7736.3	36.4
5/C315	5	318.46	8089	319.58	8117.3	38.2
5/C330	5	333.46	8470	334.58	8498.3	40
5/C345	5	348.46	8851	349.58	8879.3	41.85
5/C360	5	363.46	9232	364.58	9260.3	43.65
5/C390	5	393.46	9994	394.58	10022.3	47.3
5/C420	5	423.46	10756	424.58	10784.3	50.95
6/C60	6	63.46	1612	64.58	1640.3	8.76
6/C68	6	71.46	1815	72.57	1843.3	9.9
6/C72	6	75.47	1917	76.59	1945.4	10.5
6/C75	6	78.46	1993	79.58	2021.3	10.92
6/C78	6	81.46	2069	82.57	2097.3	11.34
6/C80	6	83.46	2120	84.58	2148.3	11.64
6/C81	6	84.45	2145	85.56	2173.2	11.76
6/C85	6	88.46	2247	89.58	2275.3	12.36
6/C87	6	90.47	2298	91.59	2326.4	12.66
6/C90	6	93.46	2374	94.58	2402.3	13.08
6/C96	6	99.45	2526	100.56	2554.2	13.98
6/C99	6	102.48	2603	103.59	2631.2	14.4
6/C100	6	103.46	2628	104.58	2656.3	14.58
6/C103	6	106.46	2704	107.57	2732.3	15
6/C105	6	108.46	2755	109.58	2783.3	15.3
6/C108	6	111.46	2831	112.57	2859.3	15.72
6/C109	6	112.48	2857	113.59	2885.2	15.84
6/C112	6	115.47	2933	116.59	2961.4	16.32
6/C120	6	123.46	3136	124.58	3164.3	17.46
6/C124	6	127.48	3238	128.59	3266.2	18.06
6/C126	6	129.45	3288	130.56	3316.2	18.36
6/C128	6	131.46	3339	132.57	3367.3	18.6
6/C136	6	139.45	3542	140.56	3570.2	19.8
6/C144	6	147.48	3746	148.59	3774.2	20.94
6/C146	6	149.45	3796	150.56	3824.2	21.24
6/C151	6	154.45	3923	155.56	3951.2	21.96
6/C158	6	161.46	4101	162.57	4129.3	22.98
6/C162	6	165.47	4203	166.59	4231.4	23.58

C continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
6/C173	6	176.46	4482	177.57	4510.3	25.2
6/C180	6	183.46	4660	184.58	4688.3	26.22
6/C185	6	188.46	4787	189.58	4815.3	26.94
6/C190	6	193.46	4914	194.58	4942.3	27.66
6/C195	6	198.46	5041	199.58	5069.3	28.38
6/C204	6	207.48	5270	208.59	5298.2	29.7
6/C210	6	213.46	5422	214.58	5450.3	30.54
6/C225	6	228.46	5803	229.58	5831.3	32.76
6/C240	6	243.46	6184	244.58	6212.3	34.92
6/C255	6	258.46	6565	259.58	6593.3	37.08
6/C270	6	273.46	6946	274.58	6974.3	39.3
6/C285	6	288.46	7327	289.58	7355.3	41.46
6/C300	6	303.46	7708	304.58	7736.3	43.68
6/C315	6	318.46	8089	319.58	8117.3	45.84
6/C330	6	333.46	8470	334.58	8498.3	48
6/C345	6	348.46	8851	349.58	8879.3	50.22
6/C360	6	363.46	9232	364.58	9260.3	52.38
6/C390	6	393.46	9994	394.58	10022.3	56.76
6/C420	6	423.46	10756	424.58	10784.3	61.14
7/C60	7	63.46	1612	64.58	1640.3	10.22
7/C68	7	71.46	1815	72.57	1843.3	11.55
7/C72	7	75.47	1917	76.59	1945.4	12.25
7/C75	7	78.46	1993	79.58	2021.3	12.74
7/C78	7	81.46	2069	82.57	2097.3	13.23
7/C80	7	83.46	2120	84.58	2148.3	13.58
7/C81	7	84.45	2145	85.56	2173.2	13.72
7/C85	7	88.46	2247	89.58	2275.3	14.42
7/C87	7	90.47	2298	91.59	2326.4	14.77
7/C90	7	93.46	2374	94.58	2402.3	15.26
7/C96	7	99.45	2526	100.56	2554.2	16.31
7/C99	7	102.48	2603	103.59	2631.2	16.8
7/C100	7	103.46	2628	104.58	2656.3	17.01
7/C103	7	106.46	2704	107.57	2732.3	17.5
7/C105	7	108.46	2755	109.58	2783.3	17.85
7/C108	7	111.46	2831	112.57	2859.3	18.34
7/C109	7	112.48	2857	113.59	2885.2	18.48
7/C112	7	115.47	2933	116.59	2961.4	19.04
7/C120	7	123.46	3136	124.58	3164.3	20.37
7/C124	7	127.48	3238	128.59	3266.2	21.07
7/C126	7	129.45	3288	130.56	3316.2	21.42
7/C128	7	131.46	3339	132.57	3367.3	21.7
7/C136	7	139.45	3542	140.56	3570.2	23.1
7/C144	7	147.48	3746	148.59	3774.2	24.43
7/C146	7	149.45	3796	150.56	3824.2	24.78
7/C151	7	154.45	3923	155.56	3951.2	25.62
7/C158	7	161.46	4101	162.57	4129.3	26.81
7/C162	7	165.47	4203	166.59	4231.4	27.51

BANDED CLASSIC WRAPPED V-BELTS



C continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
7/C173	7	176.46	4482	177.57	4510.3	29.4
7/C180	7	183.46	4660	184.58	4688.3	30.59
7/C185	7	188.46	4787	189.58	4815.3	31.43
7/C190	7	193.46	4914	194.58	4942.3	32.27
7/C195	7	198.46	5041	199.58	5069.3	33.11
7/C204	7	207.48	5270	208.59	5298.2	34.65
7/C210	7	213.46	5422	214.58	5450.3	35.63
7/C225	7	228.46	5803	229.58	5831.3	38.22
7/C240	7	243.46	6184	244.58	6212.3	40.74
7/C255	7	258.46	6565	259.58	6593.3	43.26
7/C270	7	273.46	6946	274.58	6974.3	45.85
7/C285	7	288.46	7327	289.58	7355.3	48.37
7/C300	7	303.46	7708	304.58	7736.3	50.96
7/C315	7	318.46	8089	319.58	8117.3	53.48
7/C330	7	333.46	8470	334.58	8498.3	56
7/C345	7	348.46	8851	349.58	8879.3	58.59
7/C360	7	363.46	9232	364.58	9260.3	61.11
7/C390	7	393.46	9994	394.58	10022.3	66.22
7/C420	7	423.46	10756	424.58	10784.3	71.33
8/C60	8	63.46	1612	64.58	1640.3	11.68
8/C68	8	71.46	1815	72.57	1843.3	13.2
8/C72	8	75.47	1917	76.59	1945.4	14
8/C75	8	78.46	1993	79.58	2021.3	14.56
8/C78	8	81.46	2069	82.57	2097.3	15.12
8/C80	8	83.46	2120	84.58	2148.3	15.52
8/C81	8	84.45	2145	85.56	2173.2	15.68
8/C85	8	88.46	2247	89.58	2275.3	16.48
8/C87	8	90.47	2298	91.59	2326.4	16.88
8/C90	8	93.46	2374	94.58	2402.3	17.44
8/C96	8	99.45	2526	100.56	2554.2	18.64
8/C99	8	102.48	2603	103.59	2631.2	19.2
8/C100	8	103.46	2628	104.58	2656.3	19.44
8/C103	8	106.46	2704	107.57	2732.3	20
8/C105	8	108.46	2755	109.58	2783.3	20.4
8/C108	8	111.46	2831	112.57	2859.3	20.96
8/C109	8	112.48	2857	113.59	2885.2	21.12
8/C112	8	115.47	2933	116.59	2961.4	21.76
8/C120	8	123.46	3136	124.58	3164.3	23.28
8/C124	8	127.48	3238	128.59	3266.2	24.08
8/C126	8	129.45	3288	130.56	3316.2	24.48
8/C128	8	131.46	3339	132.57	3367.3	24.8
8/C136	8	139.45	3542	140.56	3570.2	26.4
8/C144	8	147.48	3746	148.59	3774.2	27.92
8/C146	8	149.45	3796	150.56	3824.2	28.32
8/C151	8	154.45	3923	155.56	3951.2	29.28
8/C158	8	161.46	4101	162.57	4129.3	30.64
8/C162	8	165.47	4203	166.59	4231.4	31.44

C continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
8/C173	8	176.46	4482	177.57	4510.3	33.6
8/C180	8	183.46	4660	184.58	4688.3	34.96
8/C185	8	188.46	4787	189.58	4815.3	35.92
8/C190	8	193.46	4914	194.58	4942.3	36.88
8/C195	8	198.46	5041	199.58	5069.3	37.84
8/C204	8	207.48	5270	208.59	5298.2	39.6
8/C210	8	213.46	5422	214.58	5450.3	40.72
8/C225	8	228.46	5803	229.58	5831.3	43.68
8/C240	8	243.46	6184	244.58	6212.3	46.56
8/C255	8	258.46	6565	259.58	6593.3	49.44
8/C270	8	273.46	6946	274.58	6974.3	52.4
8/C285	8	288.46	7327	289.58	7355.3	55.28
8/C300	8	303.46	7708	304.58	7736.3	58.24
8/C315	8	318.46	8089	319.58	8117.3	61.12
8/C330	8	333.46	8470	334.58	8498.3	64
8/C345	8	348.46	8851	349.58	8879.3	66.96
8/C360	8	363.46	9232	364.58	9260.3	69.84
8/C390	8	393.46	9994	394.58	10022.3	75.68
8/C420	8	423.46	10756	424.58	10784.3	81.52
9/C60	9	63.46	1612	64.58	1640.3	13.14
9/C68	9	71.46	1815	72.57	1843.3	14.85
9/C72	9	75.47	1917	76.59	1945.4	15.75
9/C75	9	78.46	1993	79.58	2021.3	16.38
9/C78	9	81.46	2069	82.57	2097.3	17.01
9/C80	9	83.46	2120	84.58	2148.3	17.46
9/C81	9	84.45	2145	85.56	2173.2	17.64
9/C85	9	88.46	2247	89.58	2275.3	18.54
9/C87	9	90.47	2298	91.59	2326.4	18.99
9/C90	9	93.46	2374	94.58	2402.3	19.62
9/C96	9	99.45	2526	100.56	2554.2	20.97
9/C99	9	102.48	2603	103.59	2631.2	21.6
9/C100	9	103.46	2628	104.58	2656.3	21.87
9/C103	9	106.46	2704	107.57	2732.3	22.5
9/C105	9	108.46	2755	109.58	2783.3	22.95
9/C108	9	111.46	2831	112.57	2859.3	23.58
9/C109	9	112.48	2857	113.59	2885.2	23.76
9/C112	9	115.47	2933	116.59	2961.4	24.48
9/C120	9	123.46	3136	124.58	3164.3	26.19
9/C124	9	127.48	3238	128.59	3266.2	27.09
9/C126	9	129.45	3288	130.56	3316.2	27.54
9/C128	9	131.46	3339	132.57	3367.3	27.9
9/C136	9	139.45	3542	140.56	3570.2	29.7
9/C144	9	147.48	3746	148.59	3774.2	31.41
9/C146	9	149.45	3796	150.56	3824.2	31.86

BANDED CLASSIC WRAPPED V-BELTS



C continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
9/C151	9	154.45	3923	155.56	3951.2	32.94
9/C158	9	161.46	4101	162.57	4129.3	34.47
9/C162	9	165.47	4203	166.59	4231.4	35.37
9/C173	9	176.46	4482	177.57	4510.3	37.8
9/C180	9	183.46	4660	184.58	4688.3	39.33
9/C185	9	188.46	4787	189.58	4815.3	40.41
9/C190	9	193.46	4914	194.58	4942.3	41.49
9/C195	9	198.46	5041	199.58	5069.3	42.57
9/C204	9	207.48	5270	208.59	5298.2	44.55
9/C210	9	213.46	5422	214.58	5450.3	45.81
9/C225	9	228.46	5803	229.58	5831.3	49.14
9/C240	9	243.46	6184	244.58	6212.3	52.38
9/C255	9	258.46	6565	259.58	6593.3	55.62
9/C270	9	273.46	6946	274.58	6974.3	58.95
9/C285	9	288.46	7327	289.58	7355.3	62.19
9/C300	9	303.46	7708	304.58	7736.3	65.52
9/C315	9	318.46	8089	319.58	8117.3	68.76
9/C330	9	333.46	8470	334.58	8498.3	72
9/C345	9	348.46	8851	349.58	8879.3	75.33
9/C360	9	363.46	9232	364.58	9260.3	78.57
9/C390	9	393.46	9994	394.58	10022.3	85.14
9/C420	9	423.46	10756	424.58	10784.3	91.71
9/C109	9	112.48	2857	113.59	2885.2	23.76
9/C112	9	115.47	2933	116.59	2961.4	24.48
9/C120	9	123.46	3136	124.58	3164.3	26.19
9/C124	9	127.48	3238	128.59	3266.2	27.09
9/C126	9	129.45	3288	130.56	3316.2	27.54
9/C128	9	131.46	3339	132.57	3367.3	27.9
9/C136	9	139.45	3542	140.56	3570.2	29.7
9/C144	9	147.48	3746	148.59	3774.2	31.41
9/C146	9	149.45	3796	150.56	3824.2	31.86
9/C151	9	154.45	3923	155.56	3951.2	32.94
9/C158	9	161.46	4101	162.57	4129.3	34.47
9/C162	9	165.47	4203	166.59	4231.4	35.37
9/C173	9	176.46	4482	177.57	4510.3	37.8
9/C180	9	183.46	4660	184.58	4688.3	39.33
9/C185	9	188.46	4787	189.58	4815.3	40.41
9/C190	9	193.46	4914	194.58	4942.3	41.49
9/C195	9	198.46	5041	199.58	5069.3	42.57
9/C204	9	207.48	5270	208.59	5298.2	44.55
9/C210	9	213.46	5422	214.58	5450.3	45.81
9/C225	9	228.46	5803	229.58	5831.3	49.14
9/C240	9	243.46	6184	244.58	6212.3	52.38
9/C255	9	258.46	6565	259.58	6593.3	55.62
9/C270	9	273.46	6946	274.58	6974.3	58.95
9/C285	9	288.46	7327	289.58	7355.3	62.19
9/C300	9	303.46	7708	304.58	7736.3	65.52

C continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
9/C315	9	318.46	8089	319.58	8117.3	68.76
9/C330	9	333.46	8470	334.58	8498.3	72
9/C345	9	348.46	8851	349.58	8879.3	75.33
9/C360	9	363.46	9232	364.58	9260.3	78.57
9/C390	9	393.46	9994	394.58	10022.3	85.14
9/C420	9	423.46	10756	424.58	10784.3	91.71
10/C60	10	63.46	1612	64.58	1640.3	14.6
10/C68	10	71.46	1815	72.57	1843.3	16.5
10/C72	10	75.47	1917	76.59	1945.4	17.5
10/C75	10	78.46	1993	79.58	2021.3	18.2
10/C78	10	81.46	2069	82.57	2097.3	18.9
10/C80	10	83.46	2120	84.58	2148.3	19.4
10/C81	10	84.45	2145	85.56	2173.2	19.6
10/C85	10	88.46	2247	89.58	2275.3	20.6
10/C87	10	90.47	2298	91.59	2326.4	21.1
10/C90	10	93.46	2374	94.58	2402.3	21.8
10/C96	10	99.45	2526	100.56	2554.2	23.3
10/C99	10	102.48	2603	103.59	2631.2	24
10/C100	10	103.46	2628	104.58	2656.3	24.3
10/C103	10	106.46	2704	107.57	2732.3	25
10/C105	10	108.46	2755	109.58	2783.3	25.5
10/C108	10	111.46	2831	112.57	2859.3	26.2
10/C109	10	112.48	2857	113.59	2885.2	26.4
10/C112	10	115.47	2933	116.59	2961.4	27.2
10/C120	10	123.46	3136	124.58	3164.3	29.1
10/C124	10	127.48	3238	128.59	3266.2	30.1
10/C126	10	129.45	3288	130.56	3316.2	30.6
10/C128	10	131.46	3339	132.57	3367.3	31
10/C136	10	139.45	3542	140.56	3570.2	33
10/C144	10	147.48	3746	148.59	3774.2	34.9
10/C146	10	149.45	3796	150.56	3824.2	35.4
10/C151	10	154.45	3923	155.56	3951.2	36.6
10/C158	10	161.46	4101	162.57	4129.3	38.3
10/C162	10	165.47	4203	166.59	4231.4	39.3
10/C173	10	176.46	4482	177.57	4510.3	42
10/C180	10	183.46	4660	184.58	4688.3	43.7
10/C185	10	188.46	4787	189.58	4815.3	44.9
10/C190	10	193.46	4914	194.58	4942.3	46.1
10/C195	10	198.46	5041	199.58	5069.3	47.3
10/C204	10	207.48	5270	208.59	5298.2	49.5
10/C210	10	213.46	5422	214.58	5450.3	50.9
10/C225	10	228.46	5803	229.58	5831.3	54.6
10/C240	10	243.46	6184	244.58	6212.3	58.2
10/C255	10	258.46	6565	259.58	6593.3	61.8
10/C270	10	273.46	6946	274.58	6974.3	65.5
10/C285	10	288.46	7327	289.58	7355.3	69.1
10/C300	10	303.46	7708	304.58	7736.3	72.8

BANDED CLASSIC WRAPPED V-BELTS



C continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
10/C315	10	318.46	8089	319.58	8117.3	76.4
10/C330	10	333.46	8470	334.58	8498.3	80
10/C345	10	348.46	8851	349.58	8879.3	83.7
10/C360	10	363.46	9232	364.58	9260.3	87.3
10/C390	10	393.46	9994	394.58	10022.3	94.6
10/C420	10	423.46	10756	424.58	10784.3	101.9
11/C60	11	63.46	1612	64.58	1640.3	16.06
11/C68	11	71.46	1815	72.57	1843.3	18.15
11/C72	11	75.47	1917	76.59	1945.4	19.25
11/C75	11	78.46	1993	79.58	2021.3	20.02
11/C78	11	81.46	2069	82.57	2097.3	20.79
11/C80	11	83.46	2120	84.58	2148.3	21.34
11/C81	11	84.45	2145	85.56	2173.2	21.56
11/C85	11	88.46	2247	89.58	2275.3	22.66
11/C87	11	90.47	2298	91.59	2326.4	23.21
11/C90	11	93.46	2374	94.58	2402.3	23.98
11/C96	11	99.45	2526	100.56	2554.2	25.63
11/C99	11	102.48	2603	103.59	2631.2	26.4
11/C100	11	103.46	2628	104.58	2656.3	26.73
11/C103	11	106.46	2704	107.57	2732.3	27.5
11/C105	11	108.46	2755	109.58	2783.3	28.05
11/C108	11	111.46	2831	112.57	2859.3	28.82
11/C109	11	112.48	2857	113.59	2885.2	29.04
11/C112	11	115.47	2933	116.59	2961.4	29.92
11/C120	11	123.46	3136	124.58	3164.3	32.01
11/C124	11	127.48	3238	128.59	3266.2	33.11
11/C126	11	129.45	3288	130.56	3316.2	33.66
11/C128	11	131.46	3339	132.57	3367.3	34.1
11/C136	11	139.45	3542	140.56	3570.2	36.3
11/C144	11	147.48	3746	148.59	3774.2	38.39
11/C146	11	149.45	3796	150.56	3824.2	38.94
11/C151	11	154.45	3923	155.56	3951.2	40.26
11/C158	11	161.46	4101	162.57	4129.3	42.13
11/C162	11	165.47	4203	166.59	4231.4	43.23
11/C173	11	176.46	4482	177.57	4510.3	46.2
11/C180	11	183.46	4660	184.58	4688.3	48.07
11/C185	11	188.46	4787	189.58	4815.3	49.39
11/C190	11	193.46	4914	194.58	4942.3	50.71
11/C195	11	198.46	5041	199.58	5069.3	52.03
11/C204	11	207.48	5270	208.59	5298.2	54.45
11/C210	11	213.46	5422	214.58	5450.3	55.99
11/C225	11	228.46	5803	229.58	5831.3	60.06
11/C240	11	243.46	6184	244.58	6212.3	64.02
11/C255	11	258.46	6565	259.58	6593.3	67.98
11/C270	11	273.46	6946	274.58	6974.3	72.05
11/C285	11	288.46	7327	289.58	7355.3	76.01
11/C300	11	303.46	7708	304.58	7736.3	80.08


C continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
11/C315	11	318.46	8089	319.58	8117.3	84.04
11/C330	11	333.46	8470	334.58	8498.3	88
11/C345	11	348.46	8851	349.58	8879.3	92.07
11/C360	11	363.46	9232	364.58	9260.3	96.03
11/C390	11	393.46	9994	394.58	10022.3	104.06
11/C420	11	423.46	10756	424.58	10784.3	112.09
12/C60	12	63.46	1612	64.58	1640.3	17.52
12/C68	12	71.46	1815	72.57	1843.3	19.8
12/C72	12	75.47	1917	76.59	1945.4	21
12/C75	12	78.46	1993	79.58	2021.3	21.84
12/C78	12	81.46	2069	82.57	2097.3	22.68
12/C80	12	83.46	2120	84.58	2148.3	23.28
12/C81	12	84.45	2145	85.56	2173.2	23.52
12/C85	12	88.46	2247	89.58	2275.3	24.72
12/C87	12	90.47	2298	91.59	2326.4	25.32
12/C90	12	93.46	2374	94.58	2402.3	26.16
12/C96	12	99.45	2526	100.56	2554.2	27.96
12/C99	12	102.48	2603	103.59	2631.2	28.8
12/C100	12	103.46	2628	104.58	2656.3	29.16
12/C103	12	106.46	2704	107.57	2732.3	30
12/C105	12	108.46	2755	109.58	2783.3	30.6
12/C108	12	111.46	2831	112.57	2859.3	31.44
12/C109	12	112.48	2857	113.59	2885.2	31.68
12/C112	12	115.47	2933	116.59	2961.4	32.64
12/C120	12	123.46	3136	124.58	3164.3	34.92
12/C124	12	127.48	3238	128.59	3266.2	36.12
12/C126	12	129.45	3288	130.56	3316.2	36.72
12/C128	12	131.46	3339	132.57	3367.3	37.2
12/C124	12	127.48	3238	128.59	3266.2	36.12
12/C126	12	129.45	3288	130.56	3316.2	36.72
12/C128	12	131.46	3339	132.57	3367.3	37.2
12/C136	12	139.45	3542	140.56	3570.2	39.6
12/C144	12	147.48	3746	148.59	3774.2	41.88
12/C146	12	149.45	3796	150.56	3824.2	42.48
12/C151	12	154.45	3923	155.56	3951.2	43.92
12/C87	12	90.47	2298	91.59	2326.4	25.32
12/C90	12	93.46	2374	94.58	2402.3	26.16
12/C96	12	99.45	2526	100.56	2554.2	27.96
12/C99	12	102.48	2603	103.59	2631.2	28.8
12/C100	12	103.46	2628	104.58	2656.3	29.16
12/C103	12	106.46	2704	107.57	2732.3	30
12/C105	12	108.46	2755	109.58	2783.3	30.6
12/C108	12	111.46	2831	112.57	2859.3	31.44
12/C109	12	112.48	2857	113.59	2885.2	31.68
12/C112	12	115.47	2933	116.59	2961.4	32.64
12/C120	12	123.46	3136	124.58	3164.3	34.92
12/C136	12	139.45	3542	140.56	3570.2	39.6

BANDED CLASSIC WRAPPED V-BELTS

C continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
12/C144	12	147.48	3746	148.59	3774.2	41.88
12/C146	12	149.45	3796	150.56	3824.2	42.48
12/C151	12	154.45	3923	155.56	3951.2	43.92
12/C158	12	161.46	4101	162.57	4129.3	45.96
12/C162	12	165.47	4203	166.59	4231.4	47.16
12/C173	12	176.46	4482	177.57	4510.3	50.4
12/C180	12	183.46	4660	184.58	4688.3	52.44
12/C185	12	188.46	4787	189.58	4815.3	53.88
12/C190	12	193.46	4914	194.58	4942.3	55.32
12/C195	12	198.46	5041	199.58	5069.3	56.76
12/C204	12	207.48	5270	208.59	5298.2	59.4
12/C210	12	213.46	5422	214.58	5450.3	61.08
12/C225	12	228.46	5803	229.58	5831.3	65.52
12/C240	12	243.46	6184	244.58	6212.3	69.84
12/C255	12	258.46	6565	259.58	6593.3	74.16
12/C270	12	273.46	6946	274.58	6974.3	78.6
12/C285	12	288.46	7327	289.58	7355.3	82.92
12/C300	12	303.46	7708	304.58	7736.3	87.36
12/C315	12	318.46	8089	319.58	8117.3	91.68
12/C330	12	333.46	8470	334.58	8498.3	96
12/C345	12	348.46	8851	349.58	8879.3	100.44
12/C360	12	363.46	9232	364.58	9260.3	104.76
12/C390	12	393.46	9994	394.58	10022.3	113.52
12/C420	12	423.46	10756	424.58	10784.3	122.28



BELT PART NUMBER NOMENCLATURE

Belt No: **2/D100**
2/ - Number of Ribs: 2
D - Profile
100 - Inside Circumference (In)

D

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/D144	2	148.7	3777	150.06	3811.5	12.7
2/D158	2	162.68	4132	164.04	4166.6	13.94
2/D173	2	177.68	4513	179.04	4547.6	15.26
2/D180	2	184.69	4691	186.05	4725.7	15.88
2/D195	2	199.69	5072	201.05	5106.7	17.2
2/D210	2	214.69	5453	216.05	5487.7	18.52
2/D225	2	229.69	5834	231.05	5868.7	19.84
2/D240	2	244.69	6215	246.05	6249.7	21.16
2/D255	2	259.69	6596	261.05	6630.7	22.48
2/D270	2	274.69	6977	276.05	7011.7	23.8
2/D285	2	289.69	7358	291.05	7392.7	25.14

D

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/D300	2	304.69	7739	306.05	7773.7	26.46
2/D315	2	319.69	8120	321.05	8154.7	27.78
2/D330	2	334.69	8501	336.05	8535.7	29.1
2/D345	2	349.69	8882	351.05	8916.7	30.42
2/D360	2	364.69	9263	366.05	9297.7	31.74
2/D390	2	394.69	10025	396.05	10059.7	34.4
2/D420	2	424.69	10787	426.05	10821.7	37.04
3/D144	3	148.7	3777	150.06	3811.5	19.05
3/D158	3	162.68	4132	164.04	4166.6	20.91
3/D173	3	177.68	4513	179.04	4547.6	22.89
3/D180	3	184.69	4691	186.05	4725.7	23.82
3/D195	3	199.69	5072	201.05	5106.7	25.8
3/D210	3	214.69	5453	216.05	5487.7	27.78
3/D225	3	229.69	5834	231.05	5868.7	29.76
3/D240	3	244.69	6215	246.05	6249.7	31.74
3/D255	3	259.69	6596	261.05	6630.7	33.72
3/D270	3	274.69	6977	276.05	7011.7	35.7
3/D285	3	289.69	7358	291.05	7392.7	37.71
3/D300	3	304.69	7739	306.05	7773.7	39.69
3/D315	3	319.69	8120	321.05	8154.7	41.67
3/D330	3	334.69	8501	336.05	8535.7	43.65
3/D345	3	349.69	8882	351.05	8916.7	45.63
3/D360	3	364.69	9263	366.05	9297.7	47.61
3/D390	3	394.69	10025	396.05	10059.7	51.6
3/D420	3	424.69	10787	426.05	10821.7	55.56
4/D144	4	148.7	3777	150.06	3811.5	25.4
4/D158	4	162.68	4132	164.04	4166.6	27.88
4/D173	4	177.68	4513	179.04	4547.6	30.52
4/D180	4	184.69	4691	186.05	4725.7	31.76
4/D195	4	199.69	5072	201.05	5106.7	34.4
4/D210	4	214.69	5453	216.05	5487.7	37.04
4/D225	4	229.69	5834	231.05	5868.7	39.68
4/D240	4	244.69	6215	246.05	6249.7	42.32
4/D255	4	259.69	6596	261.05	6630.7	44.96
4/D270	4	274.69	6977	276.05	7011.7	47.6
4/D285	4	289.69	7358	291.05	7392.7	50.28
4/D300	4	304.69	7739	306.05	7773.7	52.92
4/D315	4	319.69	8120	321.05	8154.7	55.56
4/D330	4	334.69	8501	336.05	8535.7	58.2
4/D345	4	349.69	8882	351.05	8916.7	60.84
4/D360	4	364.69	9263	366.05	9297.7	63.48
4/D390	4	394.69	10025	396.05	10059.7	68.8
4/D420	4	424.69	10787	426.05	10821.7	74.08
5/D144	5	148.7	3777	150.06	3811.5	31.75
5/D158	5	162.68	4132	164.04	4166.6	34.85
5/D173	5	177.68	4513	179.04	4547.6	38.15
5/D180	5	184.69	4691	186.05	4725.7	39.7

BANDED CLASSIC WRAPPED V-BELTS

D						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5/D195	5	199.69	5072	201.05	5106.7	43
5/D210	5	214.69	5453	216.05	5487.7	46.3
5/D225	5	229.69	5834	231.05	5868.7	49.6
5/D240	5	244.69	6215	246.05	6249.7	52.9
5/D255	5	259.69	6596	261.05	6630.7	56.2
5/D270	5	274.69	6977	276.05	7011.7	59.5
5/D285	5	289.69	7358	291.05	7392.7	62.85
5/D300	5	304.69	7739	306.05	7773.7	66.15
5/D315	5	319.69	8120	321.05	8154.7	69.45
5/D330	5	334.69	8501	336.05	8535.7	72.75
5/D345	5	349.69	8882	351.05	8916.7	76.05
5/D360	5	364.69	9263	366.05	9297.7	79.35
5/D390	5	394.69	10025	396.05	10059.7	86
5/D420	5	424.69	10787	426.05	10821.7	92.6
6/D144	6	148.7	3777	150.06	3811.5	38.1
6/D158	6	162.68	4132	164.04	4166.6	41.82
6/D173	6	177.68	4513	179.04	4547.6	45.78
6/D180	6	184.69	4691	186.05	4725.7	47.64
6/D195	6	199.69	5072	201.05	5106.7	51.6
6/D210	6	214.69	5453	216.05	5487.7	55.56
6/D225	6	229.69	5834	231.05	5868.7	59.52
6/D240	6	244.69	6215	246.05	6249.7	63.48
6/D255	6	259.69	6596	261.05	6630.7	67.44
6/D270	6	274.69	6977	276.05	7011.7	71.4
6/D285	6	289.69	7358	291.05	7392.7	75.42
6/D300	6	304.69	7739	306.05	7773.7	79.38
6/D315	6	319.69	8120	321.05	8154.7	83.34
6/D330	6	334.69	8501	336.05	8535.7	87.3
6/D345	6	349.69	8882	351.05	8916.7	91.26
6/D360	6	364.69	9263	366.05	9297.7	95.22
6/D390	6	394.69	10025	396.05	10059.7	103.2
6/D420	6	424.69	10787	426.05	10821.7	111.12
7/D144	7	148.7	3777	150.06	3811.5	44.45
7/D158	7	162.68	4132	164.04	4166.6	48.79
7/D173	7	177.68	4513	179.04	4547.6	53.41
7/D180	7	184.69	4691	186.05	4725.7	55.58
7/D195	7	199.69	5072	201.05	5106.7	60.2
7/D210	7	214.69	5453	216.05	5487.7	64.82
7/D225	7	229.69	5834	231.05	5868.7	69.44
7/D240	7	244.69	6215	246.05	6249.7	74.06
7/D255	7	259.69	6596	261.05	6630.7	78.68
7/D270	7	274.69	6977	276.05	7011.7	83.3
7/D285	7	289.69	7358	291.05	7392.7	87.99
7/D300	7	304.69	7739	306.05	7773.7	92.61
7/D315	7	319.69	8120	321.05	8154.7	97.23
7/D330	7	334.69	8501	336.05	8535.7	101.85
7/D345	7	349.69	8882	351.05	8916.7	106.47

D continue						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
7/D360	7	364.69	9263	366.05	9297.7	111.09
7/D390	7	394.69	10025	396.05	10059.7	120.4
7/D420	7	424.69	10787	426.05	10821.7	129.64
8/D210	8	214.69	5453	216.05	5487.7	74.08
8/D225	8	229.69	5834	231.05	5868.7	79.36
8/D240	8	244.69	6215	246.05	6249.7	84.64
8/D255	8	259.69	6596	261.05	6630.7	89.92
8/D270	8	274.69	6977	276.05	7011.7	95.2
8/D285	8	289.69	7358	291.05	7392.7	100.56
8/D300	8	304.69	7739	306.05	7773.7	105.84
8/D315	8	319.69	8120	321.05	8154.7	111.12
8/D330	8	334.69	8501	336.05	8535.7	116.4
8/D345	8	349.69	8882	351.05	8916.7	121.68
8/D360	8	364.69	9263	366.05	9297.7	126.96
8/D390	8	394.69	10025	396.05	10059.7	137.6
8/D420	8	424.69	10787	426.05	10821.7	148.16
10/D330	10	334.69	8501	336.05	8535.7	145.5




BANDED CLASSIC COGGED BX, CX V-BELTS



Banded Raw Edge Cogged V-Belts combine the features of raw edge construction, cogged design, and multiple belts joined by a band. These belts are designed for applications that demand efficient power transmission, high-torque capabilities, and resistance to wear and heat.

BELT CONSTRUCTION BX / CX

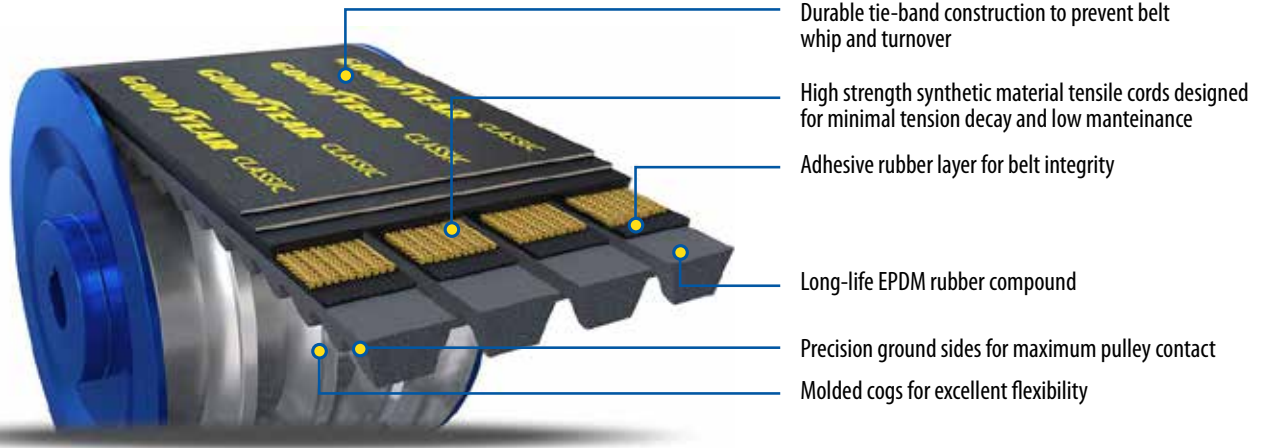

FEATURES & BENEFITS


- **Efficient Power Transmission:** The cogged design and raw edge construction contribute to efficient power transmission, minimizing energy loss and improving overall system performance.
- **Suitable for Heavy-Duty Applications:** The banded construction and high load-carrying capacity make these belts suitable for heavy-duty industrial applications with demanding power transmission needs.
- Meets ARPM/RMA IP-3-2 oil and heat resistant standards.
- Meets ARPM/RMA IP-3-3 static conductivity requirements.
- **TEMPERATURE RANGE:**
-51°C/-70°F to +121°C /+250°F.

BELT PART NUMBER NOMENCLATURE

Belt No: **4/BX100**
4 - Number Ribs
B - Profile
X - Molded Cogged
100 - Inside Circumference (In)


PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
WRAPPED V-BELTS				
BX	44.7	160.7	1135.4	4081.8
CX	78.5	176.5	1993.9	4483.1

*Additional Length May Be Available.
Contact us for more information.

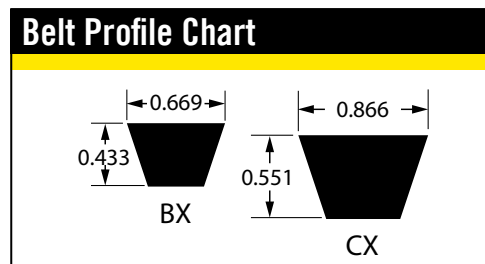

Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
Copyright 2023 The Goodyear Tire & Rubber Company

BANDED CLASSIC COGGED BX, CX V-BELTS



BELT PART NUMBER NOMENCLATURE

Belt No: **4/BX100**
4/ - Number Ribs
B - Profile
X - Molded Cogged
100 - Inside Circumference (In)

BX						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/BX42	2	44.72	1136	45.96	1167.4	1
2/BX46	2	48.7	1237	49.94	1268.5	1.1
2/BX50	2	52.6	1337	53.86	1368.1	1.2
2/BX51	2	53.7	1364	54.94	1395.5	1.2
2/BX53	2	55.71	1415	56.95	1446.5	1.24
2/BX54	2	56.73	1441	57.32	1456	1.24
2/BX55	2	57.72	1466	58.96	1497.6	1.3
2/BX56	2	58.7	1491	59.94	1522.5	1.32
2/BX58	2	60.71	1542	61.95	1573.5	1.36
2/BX60	2	62.72	1593	63.96	1624.6	1.4
2/BX62	2	64.72	1644	65.96	1675.4	1.46
2/BX63	2	65.71	1669	66.95	1700.5	1.48
2/BX64	2	66.73	1695	67.97	1726.4	1.5
2/BX65	2	67.72	1720	68.96	1751.6	1.52
2/BX66	2	68.7	1745	69.94	1776.5	1.54
2/BX67	2	69.72	1771	70.96	1802.4	1.56
2/BX68	2	70.71	1796	71.95	1827.5	1.58
2/BX70	2	72.72	1847	73.96	1878.6	1.64
2/BX71	2	73.7	1872	74.94	1903.5	1.66
2/BX72	2	74.72	1898	75.96	1929.4	1.66
2/BX74	2	76.73	1949	77.97	1980.4	1.72
2/BX75	2	77.72	1974	78.96	2005.6	1.74
2/BX77	2	79.72	2025	80.96	2056.4	1.78
2/BX78	2	81.35	2066.29	82.52	2096	1.84
2/BX79	2	81.73	2076	82.97	2107.4	1.84
2/BX81	2	83.7	2126	84.94	2157.5	1.88
2/BX80	2	84	2133.6	85.10	2161.54	1.92
2/BX83	2	85.71	2177	86.95	2208.5	1.92
2/BX84	2	86.73	2203	87.97	2234.4	1.94
2/BX85	2	87.72	2228	88.96	2259.6	1.96
2/BX87	2	89.72	2279	90.96	2310.4	2.02
2/BX90	2	92.72	2355	93.96	2386.6	2.08
2/BX93	2	95.71	2431	96.95	2462.5	2.14
2/BX95	2	97.72	2482	98.31	2497	2.22
2/BX96	2	98.7	2507	99.94	2538.5	2.22
2/BX97	2	99.72	2533	100.96	2564.4	2.24
2/BX100	2	102.72	2609	103.96	2640.6	2.3
2/BX103	2	105.71	2685	106.95	2716.5	2.38
2/BX105	2	107.72	2736	108.96	2767.6	2.42
2/BX112	2	114.72	2914	115.96	2945.4	2.58
2/BX124	2	126.73	3219	127.95	3250	1.35

BX						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/BX128	2	130.71	3320	131.95	3351.5	2.94
2/BX131	2	133.7	3396	134.94	3427.5	3
2/BX136	2	138.7	3523	139.94	3554.5	3.12
2/BX140	2	142.72	3625	143.96	3656.6	3.2
2/BX144	2	146.73	3727	147.97	3758.4	3.3
2/BX158	2	160.71	4082	161.95	4113.5	3.6
2/BX171	2	173.7	4412	174.92	4443	1.86
3/BX42	3	44.72	1136	45.96	1167.4	1.5
3/BX46	3	48.7	1237	49.94	1268.5	1.65
3/BX51	3	53.7	1364	54.94	1395.5	1.8
3/BX53	3	55.71	1415	56.95	1446.5	1.86
3/BX55	3	57.72	1466	58.96	1497.6	1.95
3/BX56	3	58.7	1491	59.94	1522.5	1.98
3/BX58	3	60.71	1542	61.95	1573.5	2.04
3/BX60	3	62.72	1593	63.96	1624.6	2.1
3/BX62	3	64.72	1644	65.96	1675.4	2.19
3/BX63	3	65.71	1669	66.95	1700.5	2.22
3/BX64	3	66.73	1695	67.97	1726.4	2.25
3/BX65	3	67.72	1720	68.96	1751.6	2.28
3/BX66	3	68.7	1745	69.94	1776.5	2.31
3/BX67	3	69.72	1771	70.96	1802.4	2.34
3/BX68	3	70.71	1796	71.95	1827.5	2.37
3/BX70	3	72.72	1847	73.96	1878.6	2.46
3/BX71	3	73.7	1872	74.94	1903.5	2.49
3/BX74	3	76.73	1949	77.97	1980.4	2.58
3/BX75	3	77.72	1974	78.96	2005.6	2.61
3/BX77	3	79.72	2025	80.96	2056.4	2.67
3/BX78	3	81.35	2066.29	82.52	2096	1.84
3/BX79	3	81.73	2076	82.97	2107.4	2.76
3/BX81	3	83.7	2126	84.94	2157.5	2.82
3/BX80	3	84	2133.6	85.10	2161.54	1.92
3/BX83	3	85.71	2177	86.95	2208.5	2.88
3/BX84	3	86.73	2203	87.97	2234.4	2.91
3/BX85	3	87.72	2228	88.96	2259.6	2.94
3/BX87	3	89.72	2279	90.96	2310.4	3.03
3/BX90	3	92.72	2355	93.96	2386.6	3.12
3/BX93	3	95.71	2431	96.95	2462.5	3.21
3/BX96	3	98.7	2507	99.94	2538.5	3.33
3/BX97	3	99.72	2533	100.96	2564.4	3.36
3/BX100	3	102.72	2609	103.96	2640.6	3.45
3/BX103	3	105.71	2685	106.95	2716.5	3.57
3/BX105	3	107.72	2736	108.96	2767.6	3.63
3/BX112	3	114.72	2914	115.96	2945.4	3.87
3/BX124	3	126.73	3219	127.95	3250	2.03
3/BX128	3	130.71	3320	131.95	3351.5	4.41
3/BX131	3	133.7	3396	134.94	3427.5	4.5
3/BX136	3	138.7	3523	139.94	3554.5	4.68
3/BX140	3	142.72	3625	143.96	3656.6	4.8
3/BX144	3	146.73	3727	147.97	3758.4	4.95

BANDED CLASSIC COGGED BX, CX V-BELTS



BX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3/BX158	3	160.71	4082	161.95	4113.5	5.4
3/BX171	3	173.7	4412	174.92	4443	2.8
4/BX42	4	44.72	1136	45.96	1167.4	2
4/BX46	4	48.7	1237	49.94	1268.5	2.2
4/BX51	4	53.7	1364	54.94	1395.5	2.4
4/BX53	4	55.71	1415	56.95	1446.5	2.48
4/BX55	4	57.72	1466	58.96	1497.6	2.6
4/BX56	4	58.7	1491	59.94	1522.5	2.64
4/BX58	4	60.71	1542	61.95	1573.5	2.72
4/BX60	4	62.72	1593	63.96	1624.6	2.8
4/BX62	4	64.72	1644	65.96	1675.4	2.92
4/BX63	4	65.71	1669	66.95	1700.5	2.96
4/BX64	4	66.73	1695	67.97	1726.4	3
4/BX65	4	67.72	1720	68.96	1751.6	3.04
4/BX66	4	68.7	1745	69.94	1776.5	3.08
4/BX67	4	69.72	1771	70.96	1802.4	3.12
4/BX68	4	70.71	1796	71.95	1827.5	3.16
4/BX70	4	72.72	1847	73.96	1878.6	3.28
4/BX71	4	73.7	1872	74.94	1903.5	3.32
4/BX74	4	76.73	1949	77.97	1980.4	3.44
4/BX75	4	77.72	1974	78.96	2005.6	3.48
4/BX77	4	79.72	2025	80.96	2056.4	3.56
4/BX78	4	81.35	2066.29	82.52	2096	1.84
4/BX79	4	81.73	2076	82.97	2107.4	3.68
4/BX81	4	83.7	2126	84.94	2157.5	3.76
4/BX83	4	85.71	2177	86.95	2208.5	3.84
4/BX84	4	86.73	2203	87.97	2234.4	3.88
4/BX85	4	87.72	2228	88.96	2259.6	3.92
4/BX87	4	89.72	2279	90.96	2310.4	4.04
4/BX90	4	92.72	2355	93.96	2386.6	4.16
4/BX91	4	92.72	2355	93.96	2386.6	4.16
4/BX93	4	95.71	2431	96.95	2462.5	4.28
4/BX96	4	98.7	2507	99.94	2538.5	4.44
4/BX97	4	99.72	2533	100.96	2564.4	4.48
4/BX100	4	102.72	2609	103.96	2640.6	4.6
4/BX103	4	105.71	2685	106.95	2716.5	4.76
4/BX105	4	107.72	2736	108.96	2767.6	4.84
4/BX112	4	114.72	2914	115.96	2945.4	5.16
4/BX124	4	126.73	3219	127.95	3250	2.7
4/BX128	4	130.71	3320	131.95	3351.5	5.88
4/BX131	4	133.7	3396	134.94	3427.5	6
4/BX136	4	138.7	3523	139.94	3554.5	6.24
4/BX140	4	142.72	3625	143.96	3656.6	6.4
4/BX144	4	146.73	3727	147.97	3758.4	6.6
4/BX158	4	160.71	4082	161.95	4113.5	7.2
4/BX171	4	173.7	4412	174.92	4443	3.73
5/BX42	5	44.72	1136	45.96	1167.4	2.5
5/BX46	5	48.7	1237	49.94	1268.5	2.75
5/BX51	5	53.7	1364	54.94	1395.5	3

BX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5/BX53	5	55.71	1415	56.95	1446.5	3.1
5/BX55	5	57.72	1466	58.96	1497.6	3.25
5/BX56	5	58.7	1491	59.94	1522.5	3.3
5/BX58	5	60.71	1542	61.95	1573.5	3.4
5/BX60	5	62.72	1593	63.96	1624.6	3.5
5/BX62	5	64.72	1644	65.96	1675.4	3.65
5/BX63	5	65.71	1669	66.95	1700.5	3.7
5/BX64	5	66.73	1695	67.97	1726.4	3.75
5/BX65	5	67.72	1720	68.96	1751.6	3.8
5/BX66	5	68.7	1745	69.94	1776.5	3.85
5/BX67	5	69.72	1771	70.96	1802.4	3.9
5/BX68	5	70.71	1796	71.95	1827.5	3.95
5/BX70	5	72.72	1847	73.96	1878.6	4.1
5/BX71	5	73.7	1872	74.94	1903.5	4.15
5/BX74	5	76.73	1949	77.97	1980.4	4.3
5/BX75	5	77.72	1974	78.96	2005.6	4.35
5/BX77	5	79.72	2025	80.96	2056.4	4.45
5/BX78	5	96.5	2066.29	82.52	2096	1.84
5/BX79	5	81.73	2076	82.97	2107.4	4.6
5/BX81	5	83.7	2126	84.94	2157.5	4.7
5/BX83	5	85.71	2177	86.95	2208.5	4.8
5/BX84	5	86.73	2203	87.97	2234.4	4.85
5/BX85	5	87.72	2228	88.96	2259.6	4.9
5/BX87	5	89.72	2279	90.96	2310.4	5.05
5/BX90	5	92.72	2355	93.96	2386.6	5.2
5/BX93	5	95.71	2431	96.95	2462.5	5.35
5/BX96	5	98.7	2507	99.94	2538.5	5.55
5/BX97	5	99.72	2533	100.96	2564.4	5.6
5/BX100	5	102.72	2609	103.96	2640.6	5.75
5/BX103	5	105.71	2685	106.95	2716.5	5.95
5/BX105	5	107.72	2736	108.96	2767.6	6.05
5/BX112	5	114.72	2914	115.96	2945.4	6.45
5/BX124	5	126.73	3219	127.95	3250	3.38
5/BX128	5	130.71	3320	131.95	3351.5	7.35
5/BX131	5	133.7	3396	134.94	3427.5	7.5
5/BX133	5	133.7	3396	134.94	3427.5	7.5
5/BX136	5	138.7	3523	139.94	3554.5	7.8
5/BX140	5	142.72	3625	143.96	3656.6	8
5/BX144	5	146.73	3727	147.97	3758.4	8.25
5/BX158	5	160.71	4082	161.95	4113.5	9
5/BX171	5	173.7	4412	174.92	4443	4.66
6/BX42	6	44.72	1136	45.96	1167.4	3
6/BX46	6	48.7	1237	49.94	1268.5	3.3
6/BX51	6	53.7	1364	54.94	1395.5	3.6
6/BX53	6	55.71	1415	56.95	1446.5	3.72
6/BX55	6	57.72	1466	58.96	1497.6	3.9
6/BX56	6	58.7	1491	59.94	1522.5	3.96
6/BX58	6	60.71	1542	61.95	1573.5	4.08
6/BX60	6	62.72	1593	63.96	1624.6	4.2

BANDED CLASSIC COGGED BX, CX V-BELTS



BX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
6/BX62	6	64.72	1644	65.96	1675.4	4.38
6/BX63	6	65.71	1669	66.95	1700.5	4.44
6/BX64	6	66.73	1695	67.97	1726.4	4.5
6/BX65	6	67.72	1720	68.96	1751.6	4.56
6/BX66	6	68.7	1745	69.94	1776.5	4.62
6/BX67	6	69.72	1771	70.96	1802.4	4.68
6/BX68	6	70.71	1796	71.95	1827.5	4.74
6/BX70	6	72.72	1847	73.96	1878.6	4.92
6/BX71	6	73.7	1872	74.94	1903.5	4.98
6/BX74	6	76.73	1949	77.97	1980.4	5.16
6/BX75	6	77.72	1974	78.96	2005.6	5.22
6/BX77	6	79.72	2025	80.96	2056.4	5.34
6/BX78	6	81.40	2067.56	82.50	2095.5	5.52
6/BX79	6	81.73	2076	82.97	2107.4	5.52
6/BX81	6	83.7	2126	84.94	2157.5	5.64
6/BX83	6	85.71	2177	86.95	2208.5	5.76
6/BX84	6	86.73	2203	87.97	2234.4	5.82
6/BX85	6	87.72	2228	88.96	2259.6	5.88
6/BX88	6	90	2286	91.25	2317.75	6.15
6/BX90	6	92.72	2355	93.96	2386.6	6.24
6/BX93	6	95.71	2431	96.95	2462.5	6.42
6/BX96	6	98.7	2507	99.94	2538.5	6.66
6/BX97	6	99.72	2533	100.96	2564.4	6.72
6/BX100	6	102.72	2609	103.96	2640.6	6.9
6/BX103	6	105.71	2685	106.95	2716.5	7.14
6/BX105	6	107.72	2736	108.96	2767.6	7.26
6/BX112	6	114.72	2914	115.96	2945.4	7.74
6/BX124	6	126.73	3219	127.95	3250	4.05
6/BX128	6	130.71	3320	131.95	3351.5	8.82
6/BX131	6	133.7	3396	134.94	3427.5	9
6/BX136	6	138.7	3523	139.94	3554.5	9.36
6/BX140	6	142.72	3625	143.96	3656.6	9.6
6/BX144	6	146.73	3727	147.97	3758.4	9.9
6/BX158	6	160.71	4082	161.95	4113.5	10.8
6/BX171	6	173.7	4412	174.92	4443	5.59
7/BX42	7	44.72	1136	45.96	1167.4	3.5
7/BX46	7	48.7	1237	49.94	1268.5	3.85
7/BX51	7	53.7	1364	54.94	1395.5	4.2
7/BX53	7	55.71	1415	56.95	1446.5	4.34
7/BX55	7	57.72	1466	58.96	1497.6	4.55
7/BX56	7	58.7	1491	59.94	1522.5	4.62
7/BX58	7	60.71	1542	61.95	1573.5	4.76
7/BX60	7	62.72	1593	63.96	1624.6	4.9
7/BX62	7	64.72	1644	65.96	1675.4	5.11
7/BX63	7	65.71	1669	66.95	1700.5	5.18
7/BX64	7	66.73	1695	67.97	1726.4	5.25
7/BX65	7	67.72	1720	68.96	1751.6	5.32
7/BX66	7	68.7	1745	69.94	1776.5	5.39

BX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
7/BX67	7	69.72	1771	70.96	1802.4	5.46
7/BX68	7	70.71	1796	71.95	1827.5	5.53
7/BX70	7	72.72	1847	73.96	1878.6	5.74
7/BX71	7	73.7	1872	74.94	1903.5	5.81
7/BX74	7	76.73	1949	77.97	1980.4	6.02
7/BX75	7	77.72	1974	78.96	2005.6	6.09
7/BX77	7	79.72	2025	80.96	2056.4	6.23
7/BX79	7	81.73	2076	82.97	2107.4	6.44
7/BX81	7	83.7	2126	84.94	2157.5	6.58
7/BX83	7	85.71	2177	86.95	2208.5	6.72
7/BX84	7	86.73	2203	87.97	2234.4	6.79
7/BX85	7	87.72	2228	88.96	2259.6	6.86
7/BX87	7	89.72	2279	90.96	2310.4	7.07
7/BX90	7	92.72	2355	93.96	2386.6	7.28
7/BX70	7	72.72	1847	73.96	1878.6	5.74
7/BX71	7	73.7	1872	74.94	1903.5	5.81
7/BX74	7	76.73	1949	77.97	1980.4	6.02
7/BX75	7	77.72	1974	78.96	2005.6	6.09
7/BX77	7	79.72	2025	80.96	2056.4	6.23
7/BX79	7	81.73	2076	82.97	2107.4	6.44
7/BX81	7	83.7	2126	84.94	2157.5	6.58
7/BX83	7	85.71	2177	86.95	2208.5	6.72
7/BX84	7	86.73	2203	87.97	2234.4	6.79
7/BX85	7	87.72	2228	88.96	2259.6	6.86
7/BX87	7	89.72	2279	90.96	2310.4	7.07
7/BX90	7	92.72	2355	93.96	2386.6	7.28
7/BX93	7	95.71	2431	96.95	2462.5	7.49
7/BX78	7	96.5	2066.29	82.52	2096	1.84
7/BX96	7	98.7	2507	99.94	2538.5	7.77
7/BX97	7	99.72	2533	100.96	2564.4	7.84
7/BX100	7	102.72	2609	103.96	2640.6	8.05
7/BX103	7	105.71	2685	106.95	2716.5	8.33
7/BX105	7	107.72	2736	108.96	2767.6	8.47
7/BX112	7	114.72	2914	115.96	2945.4	9.03
7/BX128	7	130.71	3320	131.95	3351.5	10.29
7/BX131	7	133.7	3396	134.94	3427.5	10.5
7/BX136	7	138.7	3523	139.94	3554.5	10.92
7/BX140	7	142.72	3625	143.96	3656.6	11.2
7/BX144	7	146.73	3727	147.97	3758.4	11.55
7/BX158	7	160.71	4082	161.95	4113.5	12.6
8/BX42	8	44.72	1136	45.96	1167.4	4
8/BX46	8	48.7	1237	49.94	1268.5	4.4
8/BX51	8	53.7	1364	54.94	1395.5	4.8
8/BX53	8	55.71	1415	56.95	1446.5	4.96
8/BX55	8	57.72	1466	58.96	1497.6	5.2
8/BX56	8	58.7	1491	59.94	1522.5	5.28
8/BX58	8	60.71	1542	61.95	1573.5	5.44
8/BX60	8	62.72	1593	63.96	1624.6	5.6
8/BX62	8	64.72	1644	65.96	1675.4	5.84

BANDED CLASSIC COGGED BX, CX V-BELTS



BX continue						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
8/BX63	8	65.71	1669	66.95	1700.5	5.92
8/BX64	8	66.73	1695	67.97	1726.4	6
8/BX65	8	67.72	1720	68.96	1751.6	6.08
8/BX66	8	68.7	1745	69.94	1776.5	6.16
8/BX67	8	69.72	1771	70.96	1802.4	6.24
8/BX68	8	70.71	1796	71.95	1827.5	6.32
8/BX70	8	72.72	1847	73.96	1878.6	6.56
8/BX71	8	73.7	1872	74.94	1903.5	6.64
8/BX74	8	76.73	1949	77.97	1980.4	6.88
8/BX75	8	77.72	1974	78.96	2005.6	6.96
8/BX77	8	79.72	2025	80.96	2056.4	7.12
8/BX78	8	96.5	2066.29	82.52	2096	1.84
8/BX79	8	81.73	2076	82.97	2107.4	7.36
8/BX81	8	83.7	2126	84.94	2157.5	7.52
8/BX83	8	85.71	2177	86.95	2208.5	7.68
8/BX84	8	86.73	2203	87.97	2234.4	7.76
8/BX85	8	87.72	2228	88.96	2259.6	7.84
8/BX87	8	89.72	2279	90.96	2310.4	8.08
8/BX90	8	92.72	2355	93.96	2386.6	8.32
8/BX93	8	95.71	2431	96.95	2462.5	8.56
8/BX96	8	98.7	2507	99.94	2538.5	8.88
8/BX97	8	99.72	2533	100.96	2564.4	8.96
8/BX100	8	102.72	2609	103.96	2640.6	9.2
8/BX103	8	105.71	2685	106.95	2716.5	9.52
8/BX105	8	107.72	2736	108.96	2767.6	9.68
8/BX112	8	114.72	2914	115.96	2945.4	10.32
8/BX124	8	126.73	3219	127.95	3250	5.41
8/BX128	8	130.71	3320	131.95	3351.5	11.76
8/BX131	8	133.7	3396	134.94	3427.5	12
8/BX136	8	138.7	3523	139.94	3554.5	12.48
8/BX140	8	142.72	3625	143.96	3656.6	12.8
8/BX144	8	146.73	3727	147.97	3758.4	13.2
8/BX158	8	160.71	4082	161.95	4113.5	14.4
8/BX171	8	173.7	4412	174.92	4443	7.46
9/BX42	9	44.72	1136	45.96	1167.4	4.5
9/BX46	9	48.7	1237	49.94	1268.5	4.95
9/BX51	9	53.7	1364	54.94	1395.5	5.4
9/BX53	9	55.71	1415	56.95	1446.5	5.58
9/BX55	9	57.72	1466	58.96	1497.6	5.85
9/BX56	9	58.7	1491	59.94	1522.5	5.94
9/BX58	9	60.71	1542	61.95	1573.5	6.12
9/BX60	9	62.72	1593	63.96	1624.6	6.3
9/BX62	9	64.72	1644	65.96	1675.4	6.57
9/BX63	9	65.71	1669	66.95	1700.5	6.66
9/BX64	9	66.73	1695	67.97	1726.4	6.75
9/BX65	9	67.72	1720	68.96	1751.6	6.84
9/BX66	9	68.7	1745	69.94	1776.5	6.93
9/BX67	9	69.72	1771	70.96	1802.4	7.02
9/BX68	9	70.71	1796	71.95	1827.5	7.11

BX continue						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
9/BX70	9	72.72	1847	73.96	1878.6	7.38
9/BX71	9	73.7	1872	74.94	1903.5	7.47
9/BX74	9	76.73	1949	77.97	1980.4	7.74
9/BX75	9	77.72	1974	78.96	2005.6	7.83
9/BX77	9	79.72	2025	80.96	2056.4	8.01
9/BX78	9	96.5	2066.29	82.52	2096	1.84
9/BX79	9	81.73	2076	82.97	2107.4	8.28
9/BX81	9	83.7	2126	84.94	2157.5	8.46
9/BX83	9	85.71	2177	86.95	2208.5	8.64
9/BX84	9	86.73	2203	87.97	2234.4	8.73
9/BX85	9	87.72	2228	88.96	2259.6	8.82
9/BX87	9	89.72	2279	90.96	2310.4	9.09
9/BX90	9	92.72	2355	93.96	2386.6	9.36
9/BX93	9	95.71	2431	96.95	2462.5	9.63
9/BX96	9	98.7	2507	99.94	2538.5	9.99
9/BX97	9	99.72	2533	100.96	2564.4	10.08
9/BX100	9	102.72	2609	103.96	2640.6	10.35
9/BX103	9	105.71	2685	106.95	2716.5	10.71
9/BX105	9	107.72	2736	108.96	2767.6	10.89
9/BX112	9	114.72	2914	115.96	2945.4	11.61
9/BX128	9	130.71	3320	131.95	3351.5	13.23
9/BX131	9	133.7	3396	134.94	3427.5	13.5
9/BX136	9	138.7	3523	139.94	3554.5	14.04
9/BX140	9	142.72	3625	143.96	3656.6	14.4
9/BX144	9	146.73	3727	147.97	3758.4	14.85
9/BX158	9	160.71	4082	161.95	4113.5	16.2
10/BX42	10	44.72	1136	45.96	1167.4	5
10/BX46	10	48.7	1237	49.94	1268.5	5.5
10/BX51	10	53.7	1364	54.94	1395.5	6
10/BX53	10	55.71	1415	56.95	1446.5	6.2
10/BX55	10	57.72	1466	58.96	1497.6	6.5
10/BX56	10	58.7	1491	59.94	1522.5	6.6
10/BX58	10	60.71	1542	61.95	1573.5	6.8
10/BX71	10	73.7	1872	74.94	1903.5	8.3
10/BX74	10	76.73	1949	77.97	1980.4	8.6
10/BX75	10	77.72	1974	78.96	2005.6	8.7
10/BX77	10	79.72	2025	80.96	2056.4	8.9
10/BX78	10	96.5	2066.29	82.52	2096	1.84
10/BX79	10	81.73	2076	82.97	2107.4	9.2
10/BX81	10	83.7	2126	84.94	2157.5	9.4
10/BX83	10	85.71	2177	86.95	2208.5	9.6
10/BX84	10	86.73	2203	87.97	2234.4	9.7
10/BX85	10	87.72	2228	88.96	2259.6	9.8
10/BX87	10	89.72	2279	90.96	2310.4	10.1
10/BX90	10	92.72	2355	93.96	2386.6	10.4
10/BX93	10	95.71	2431	96.95	2462.5	10.7
10/BX96	10	98.7	2507	99.94	2538.5	11.1
10/BX97	10	99.72	2533	100.96	2564.4	11.2
10/BX100	10	102.72	2609	103.96	2640.6	11.5

BANDED CLASSIC COGGED BX, CX V-BELTS



BX continue


Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
10/BX103	10	105.71	2685	106.95	2716.5	11.9
10/BX105	10	107.72	2736	108.96	2767.6	12.1
10/BX112	10	114.72	2914	115.96	2945.4	12.9
10/BX124	10	126.73	3219	127.95	3250	6.76
10/BX128	10	130.71	3320	131.95	3351.5	14.7
10/BX131	10	133.7	3396	134.94	3427.5	15
10/BX136	10	138.7	3523	139.94	3554.5	15.6
10/BX140	10	142.72	3625	143.96	3656.6	16
10/BX144	10	146.73	3727	147.97	3758.4	16.5
10/BX158	10	160.71	4082	161.95	4113.5	18
10/BX171	10	173.7	4412	174.92	4443	9.32
11/BX42	11	44.72	1136	45.96	1167.4	5.5
11/BX46	11	48.7	1237	49.94	1268.5	6.05
11/BX51	11	53.7	1364	54.94	1395.5	6.6
11/BX53	11	55.71	1415	56.95	1446.5	6.82
11/BX55	11	57.72	1466	58.96	1497.6	7.15
11/BX56	11	58.7	1491	59.94	1522.5	7.26
11/BX58	11	60.71	1542	61.95	1573.5	7.48
11/BX60	11	62.72	1593	63.96	1624.6	7.7
11/BX62	11	64.72	1644	65.96	1675.4	8.03
11/BX63	11	65.71	1669	66.95	1700.5	8.14
11/BX64	11	66.73	1695	67.97	1726.4	8.25
11/BX65	11	67.72	1720	68.96	1751.6	8.36
11/BX66	11	68.7	1745	69.94	1776.5	8.47
11/BX67	11	69.72	1771	70.96	1802.4	8.58
11/BX68	11	70.71	1796	71.95	1827.5	8.69
11/BX70	11	72.72	1847	73.96	1878.6	9.02
11/BX71	11	73.7	1872	74.94	1903.5	9.13
11/BX74	11	76.73	1949	77.97	1980.4	9.46
11/BX75	11	77.72	1974	78.96	2005.6	9.57
11/BX77	11	79.72	2025	80.96	2056.4	9.79
11/BX79	11	81.73	2076	82.97	2107.4	10.12
11/BX81	11	83.7	2126	84.94	2157.5	10.34
11/BX83	11	85.71	2177	86.95	2208.5	10.56
11/BX84	11	86.73	2203	87.97	2234.4	10.67
11/BX85	11	87.72	2228	88.96	2259.6	10.78
11/BX87	11	89.72	2279	90.96	2310.4	11.11
11/BX90	11	92.72	2355	93.96	2386.6	11.44
11/BX93	11	95.71	2431	96.95	2462.5	11.77
11/BX78	11	96.5	2066.29	82.52	2096	1.84
11/BX96	11	98.7	2507	99.94	2538.5	12.21
11/BX97	11	99.72	2533	100.96	2564.4	12.32
11/BX100	11	102.72	2609	103.96	2640.6	12.65
11/BX103	11	105.71	2685	106.95	2716.5	13.09
11/BX105	11	107.72	2736	108.96	2767.6	13.31
11/BX112	11	114.72	2914	115.96	2945.4	14.19
11/BX128	11	130.71	3320	131.95	3351.5	16.17
11/BX131	11	133.7	3396	134.94	3427.5	16.5
11/BX136	11	138.7	3523	139.94	3554.5	17.16

BX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
11/BX140	11	142.72	3625	143.96	3656.6	17.6
11/BX144	11	146.73	3727	147.97	3758.4	18.15
11/BX158	11	160.71	4082	161.95	4113.5	19.8
12/BX42	12	44.72	1136	45.96	1167.4	6
12/BX46	12	48.7	1237	49.94	1268.5	6.6
12/BX51	12	53.7	1364	54.94	1395.5	7.2
12/BX53	12	55.71	1415	56.95	1446.5	7.44
12/BX55	12	57.72	1466	58.96	1497.6	7.8
12/BX56	12	58.7	1491	59.94	1522.5	7.92
12/BX58	12	60.71	1542	61.95	1573.5	8.16
12/BX60	12	62.72	1593	63.96	1624.6	8.4
12/BX62	12	64.72	1644	65.96	1675.4	8.76
12/BX63	12	65.71	1669	66.95	1700.5	8.88
12/BX64	12	66.73	1695	67.97	1726.4	9
12/BX65	12	67.72	1720	68.96	1751.6	9.12
12/BX66	12	68.7	1745	69.94	1776.5	9.24
12/BX67	12	69.72	1771	70.96	1802.4	9.36
12/BX68	12	70.71	1796	71.95	1827.5	9.48
12/BX70	12	72.72	1847	73.96	1878.6	9.84
12/BX71	12	73.7	1872	74.94	1903.5	9.96
12/BX74	12	76.73	1949	77.97	1980.4	10.32
12/BX75	12	77.72	1974	78.96	2005.6	10.44
12/BX77	12	79.72	2025	80.96	2056.4	10.68
12/BX79	12	81.73	2076	82.97	2107.4	11.04
12/BX81	12	83.7	2126	84.94	2157.5	11.28
12/BX83	12	85.71	2177	86.95	2208.5	11.52
12/BX84	12	86.73	2203	87.97	2234.4	11.64
12/BX85	12	87.72	2228	88.96	2259.6	11.76
12/BX87	12	89.72	2279	90.96	2310.4	12.12
12/BX90	12	92.72	2355	93.96	2386.6	12.48
12/BX93	12	95.71	2431	96.95	2462.5	12.84
12/BX78	12	96.5	2066.29	82.52	2096	1.84
12/BX96	12	98.7	2507	99.94	2538.5	13.32
12/BX97	12	99.72	2533	100.96	2564.4	13.44
12/BX100	12	102.72	2609	103.96	2640.6	13.8
12/BX103	12	105.71	2685	106.95	2716.5	14.28
12/BX105	12	107.72	2736	108.96	2767.6	14.52
12/BX112	12	114.72	2914	115.96	2945.4	15.48
12/BX128	12	130.71	3320	131.95	3351.5	17.64
12/BX131	12	133.7	3396	134.94	3427.5	18
12/BX136	12	138.7	3523	139.94	3554.5	18.72
12/BX140	12	142.72	3625	143.96	3656.6	19.2
12/BX144	12	146.73	3727	147.97	3758.4	19.8
12/BX158	12	160.71	4082	161.95	4113.5	21.6

*Additional Length May Be Available.
Contact us for more information.

BANDED CLASSIC COGGED BX, CX V-BELTS



BELT PART NUMBER NOMENCLATURE

Belt No: **2/CX100**
2/ - Number Ribs
C - Profile
X - Molded Cogged
100 - Inside Circumference (In)

CX

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/CX75	2	78.46	1993	79.82	2027.4	2.92
2/CX81	2	84.45	2145	85.81	2179.6	3.16
2/CX85	2	88.46	2247	89.82	2281.4	3.3
2/CX90	2	93.46	2374	94.82	2408.4	3.48
2/CX96	2	99.45	2526	100.81	2560.6	3.7
2/CX100	2	103.46	2628	104.82	2662.4	3.86
2/CX105	2	108.46	2755	109.82	2789.4	4.04
2/CX112	2	115.47	2933	116.83	2967.5	4.3
2/CX120	2	123.46	3136	124.82	3170.4	4.6
2/CX136	2	139.45	3542	140.81	3576.6	5.2
2/CX144	2	147.48	3746	148.84	3780.5	5.5
2/CX162	2	165.47	4203	166.83	4237.5	6.18
2/CX173	2	176.46	4482	177.82	4516.6	6.58
3/CX75	3	78.46	1993	79.82	2027.4	4.38
3/CX81	3	84.45	2145	85.81	2179.6	4.74
3/CX85	3	88.46	2247	89.82	2281.4	4.95
3/CX90	3	93.46	2374	94.82	2408.4	5.22
3/CX96	3	99.45	2526	100.81	2560.6	5.55
3/CX100	3	103.46	2628	104.82	2662.4	5.79
3/CX105	3	108.46	2755	109.82	2789.4	6.06
3/CX112	3	115.47	2933	116.83	2967.5	6.45
3/CX120	3	123.46	3136	124.82	3170.4	6.9
3/CX136	3	139.45	3542	140.81	3576.6	7.8
3/CX144	3	147.48	3746	148.84	3780.5	8.25
3/CX162	3	165.47	4203	166.83	4237.5	9.27
3/CX173	3	176.46	4482	177.82	4516.6	9.87
4/CX75	4	78.46	1993	79.82	2027.4	5.84
4/CX81	4	84.45	2145	85.81	2179.6	6.32
4/CX85	4	88.46	2247	89.82	2281.4	6.6
4/CX90	4	93.46	2374	94.82	2408.4	6.96
4/CX96	4	99.45	2526	100.81	2560.6	7.4
4/CX100	4	103.46	2628	104.82	2662.4	7.72
4/CX105	4	108.46	2755	109.82	2789.4	8.08
4/CX112	4	115.47	2933	116.83	2967.5	8.6
4/CX120	4	123.46	3136	124.82	3170.4	9.2
4/CX136	4	139.45	3542	140.81	3576.6	10.4
4/CX144	4	147.48	3746	148.84	3780.5	11
4/CX162	4	165.47	4203	166.83	4237.5	12.36
4/CX173	4	176.46	4482	177.82	4516.6	13.16
5/CX75	5	78.46	1993	79.82	2027.4	7.3
5/CX81	5	84.45	2145	85.81	2179.6	7.9

CX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5/CX85	5	88.46	2247	89.82	2281.4	8.25
5/CX90	5	93.46	2374	94.82	2408.4	8.7
5/CX96	5	99.45	2526	100.81	2560.6	9.25
5/CX100	5	103.46	2628	104.82	2662.4	9.65
5/CX105	5	108.46	2755	109.82	2789.4	10.1
5/CX112	5	115.47	2933	116.83	2967.5	10.75
5/CX120	5	123.46	3136	124.82	3170.4	11.5
5/CX136	5	139.45	3542	140.81	3576.6	13
5/CX144	5	147.48	3746	148.84	3780.5	13.75
5/CX162	5	165.47	4203	166.83	4237.5	15.45
5/CX173	5	176.46	4482	177.82	4516.6	16.45
6/CX75	6	78.46	1993	79.82	2027.4	8.76
6/CX81	6	84.45	2145	85.81	2179.6	9.48
6/CX85	6	88.46	2247	89.82	2281.4	9.9
6/CX90	6	93.46	2374	94.82	2408.4	10.44
6/CX96	6	99.45	2526	100.81	2560.6	11.1
6/CX100	6	103.46	2628	104.82	2662.4	11.58
6/CX105	6	108.46	2755	109.82	2789.4	12.12
6/CX112	6	115.47	2933	116.83	2967.5	12.9
6/CX120	6	123.46	3136	124.82	3170.4	13.8
6/CX136	6	139.45	3542	140.81	3576.6	15.6
6/CX144	6	147.48	3746	148.84	3780.5	16.5
6/CX162	6	165.47	4203	166.83	4237.5	18.54
6/CX173	6	176.46	4482	177.82	4516.6	19.74
7/CX75	7	78.46	1993	79.82	2027.4	10.22
7/CX81	7	84.45	2145	85.81	2179.6	11.06
7/CX85	7	88.46	2247	89.82	2281.4	11.55
7/CX90	7	93.46	2374	94.82	2408.4	12.18
7/CX96	7	99.45	2526	100.81	2560.6	12.95
7/CX100	7	103.46	2628	104.82	2662.4	13.51
7/CX105	7	108.46	2755	109.82	2789.4	14.14
7/CX112	7	115.47	2933	116.83	2967.5	15.05
7/CX120	7	123.46	3136	124.82	3170.4	16.1
7/CX136	7	139.45	3542	140.81	3576.6	18.2
7/CX144	7	147.48	3746	148.84	3780.5	19.25
7/CX162	7	165.47	4203	166.83	4237.5	21.63
7/CX173	7	176.46	4482	177.82	4516.6	23.03
8/CX75	8	78.46	1993	79.82	2027.4	11.68
8/CX81	8	84.45	2145	85.81	2179.6	12.64
8/CX85	8	88.46	2247	89.82	2281.4	13.2
8/CX90	8	93.46	2374	94.82	2408.4	13.92
8/CX96	8	99.45	2526	100.81	2560.6	14.8
8/CX100	8	103.46	2628	104.82	2662.4	15.44
8/CX105	8	108.46	2755	109.82	2789.4	16.16
8/CX112	8	115.47	2933	116.83	2967.5	17.2
8/CX120	8	123.46	3136	124.82	3170.4	18.4
8/CX136	8	139.45	3542	140.81	3576.6	20.8
8/CX144	8	147.48	3746	148.84	3780.5	22
8/CX162	8	165.47	4203	166.83	4237.5	24.72

BANDED CLASSIC COGGED BX, CX V-BELTS

CX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
8/CX173	8	176.46	4482	177.82	4516.6	26.32
9/CX75	9	78.46	1993	79.82	2027.4	13.14
9/CX81	9	84.45	2145	85.81	2179.6	14.22
9/CX85	9	88.46	2247	89.82	2281.4	14.85
9/CX90	9	93.46	2374	94.82	2408.4	15.66
9/CX96	9	99.45	2526	100.81	2560.6	16.65
9/CX100	9	103.46	2628	104.82	2662.4	17.37
9/CX105	9	108.46	2755	109.82	2789.4	18.18
9/CX112	9	115.47	2933	116.83	2967.5	19.35
9/CX120	9	123.46	3136	124.82	3170.4	20.7
9/CX136	9	139.45	3542	140.81	3576.6	23.4
9/CX144	9	147.48	3746	148.84	3780.5	24.75
9/CX162	9	165.47	4203	166.83	4237.5	27.81
9/CX173	9	176.46	4482	177.82	4516.6	29.61
10/CX75	10	78.46	1993	79.82	2027.4	14.6
10/CX81	10	84.45	2145	85.81	2179.6	15.8
10/CX85	10	88.46	2247	89.82	2281.4	16.5
10/CX90	10	93.46	2374	94.82	2408.4	17.4
10/CX96	10	99.45	2526	100.81	2560.6	18.5
10/CX100	10	103.46	2628	104.82	2662.4	19.3
10/CX105	10	108.46	2755	109.82	2789.4	20.2
10/CX112	10	115.47	2933	116.83	2967.5	21.5
10/CX120	10	123.46	3136	124.82	3170.4	23
10/CX136	10	139.45	3542	140.81	3576.6	26
10/CX144	10	147.48	3746	148.84	3780.5	27.5
10/CX162	10	165.47	4203	166.83	4237.5	30.9
10/CX173	10	176.46	4482	177.82	4516.6	32.9
11/CX75	11	78.46	1993	79.82	2027.4	16.06
11/CX81	11	84.45	2145	85.81	2179.6	17.38
11/CX85	11	88.46	2247	89.82	2281.4	18.15
11/CX90	11	93.46	2374	94.82	2408.4	19.14
11/CX96	11	99.45	2526	100.81	2560.6	20.35
11/CX100	11	103.46	2628	104.82	2662.4	21.23
11/CX105	11	108.46	2755	109.82	2789.4	22.22
11/CX112	11	115.47	2933	116.83	2967.5	23.65
11/CX120	11	123.46	3136	124.82	3170.4	25.3
11/CX136	11	139.45	3542	140.81	3576.6	28.6
11/CX144	11	147.48	3746	148.84	3780.5	30.25
11/CX162	11	165.47	4203	166.83	4237.5	33.99
11/CX173	11	176.46	4482	177.82	4516.6	36.19
12/CX75	12	78.46	1993	79.82	2027.4	17.52
12/CX81	12	84.45	2145	85.81	2179.6	18.96
12/CX85	12	88.46	2247	89.82	2281.4	19.8
12/CX90	12	93.46	2374	94.82	2408.4	20.88
12/CX96	12	99.45	2526	100.81	2560.6	22.2
12/CX100	12	103.46	2628	104.82	2662.4	23.16
12/CX105	12	108.46	2755	109.82	2789.4	24.24
12/CX112	12	115.47	2933	116.83	2967.5	25.8
12/CX120	12	123.46	3136	124.82	3170.4	27.6

CX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
12/CX136	12	139.45	3542	140.81	3576.6	31.2
12/CX144	12	147.48	3746	148.84	3780.5	33
12/CX162	12	165.47	4203	166.83	4237.5	37.08
12/CX173	12	176.46	4482	177.82	4516.6	39.48

*Additional Length May Be Available.
Contact us for more information.




BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



Goodyear Belts has developed Narrow Wrapped Banded V-belts that offer premium performance, providing a long service life. Profile provides more contact allowing higher torque and a more compact drive design. Restore your belt drive system's efficiency by installing a new Goodyear Belt.

BELT CONSTRUCTION 3V / 5V / 8V

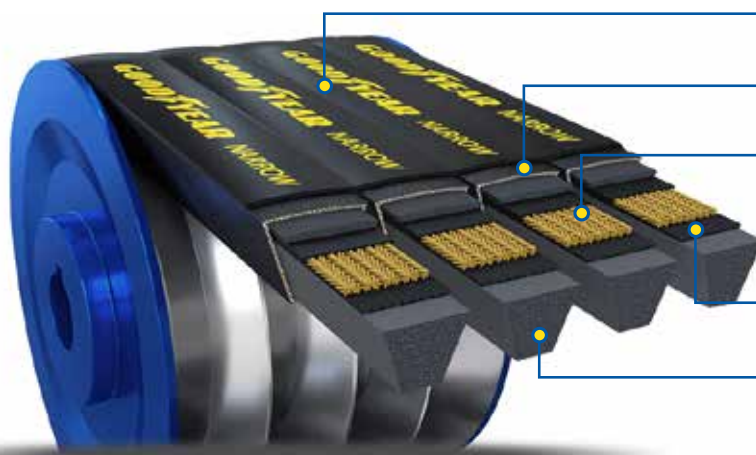

- Durable tie-band construction to prevent belt whip and turnover
- Static conductive and oil/abrasion resistant cover
- High strength synthetic material tensile cords designed for minimal tension decay and low maintenance
- Adhesive rubber layer for belt integrity
- Synthetic rubber compounds for long life and broad operating conditions

FEATURES & BENEFITS

- Efficient Power Transmission:** The cogged design and raw edge construction contribute to efficient power transmission, minimizing energy loss and improving overall system performance.
- Suitable for Heavy-Duty Applications:** The banded construction and high load-carrying capacity make these belts suitable for heavy-duty industrial applications with demanding power transmission needs.
- Meets ARPM/RMA IP-3-2 oil and heat resistant standards.
- Meets ARPM/RMA IP-3-3 static conductivity requirements.
- TEMPERATURE RANGE:**
-51°C/-70°F to +121°C /+250°F.


BELT PART NUMBER NOMENCLATURE

Belt No: **2/3V450**
2/ - Number Ribs
3V - Profile
450 - Outside Circumference (Inches in tenths:45.0")

PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
WRAPPED V-BELTS				
3V	25.0	140.0	635.0	3556.0
5V	50.0	355.0	1270.0	9017.0
8V	106.0	600.0	2692.4	15240.0


*Additional Length May Be Available.
Contact us for more information.

Belt Profile Chart

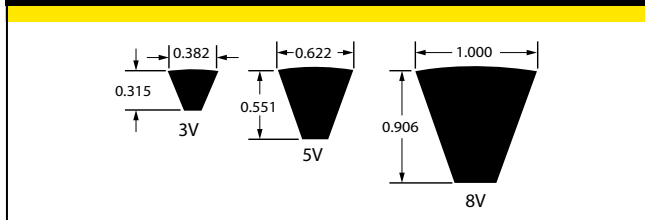

Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
Copyright 2023 The Goodyear Tire & Rubber Company

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



BELT PART NUMBER NOMENCLATURE

Belt No: **2/3V450**
 2/ - Number Ribs
 3V - Profile
 450 - Inside Circumference
 (Inches in tenths:45.0")

3V

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/3V450	2	45	1143	46.11	1171.2	0.5
2/3V475	2	47.5	1207	48.61	1234.7	0.52
2/3V500	2	50	1270	51.11	1298.2	0.54
2/3V530	2	53	1346	54.11	1374.4	0.58
2/3V560	2	56	1422	57.11	1450.6	0.6
2/3V600	2	60	1524	61.11	1552.2	0.66
2/3V630	2	63	1600	64.11	1628.4	0.68
2/3V670	2	67	1702	68.11	1730	0.72
2/3V710	2	71	1803	72.11	1831.6	0.78
2/3V750	2	75	1905	76.11	1933.2	0.82
2/3V800	2	80	2032	81.11	2060.2	0.88
2/3V850	2	85	2159	86.11	2187.2	0.92
2/3V900	2	90	2286	91.11	2314.2	0.98
2/3V950	2	95	2413	96.11	2441.2	1.04
2/3V1000	2	100	2540	101.11	2568.2	1.08
2/3V1060	2	106	2692	107.11	2720.6	1.16
2/3V1120	2	112	2845	113.11	2873	1.22
2/3V1180	2	118	2997	119.11	3025.4	1.28
2/3V1250	2	125	3175	126.11	3203.2	1.36
2/3V1320	2	132	3353	133.11	3381	1.44
2/3V1400	2	140	3556	141.11	3584.2	1.52
3/3V450	3	45	1143	46.11	1171.2	0.75
3/3V475	3	47.5	1207	48.61	1234.7	0.78
3/3V500	3	50	1270	51.11	1298.2	0.81
3/3V530	3	53	1346	54.11	1374.4	0.87
3/3V560	3	56	1422	57.11	1450.6	0.9
3/3V600	3	60	1524	61.11	1552.2	0.99
3/3V630	3	63	1600	64.11	1628.4	1.02
3/3V670	3	67	1702	68.11	1730	1.08
3/3V710	3	71	1803	72.11	1831.6	1.17
3/3V750	3	75	1905	76.11	1933.2	1.23
3/3V800	3	80	2032	81.11	2060.2	1.32
3/3V850	3	85	2159	86.11	2187.2	1.38
3/3V900	3	90	2286	91.11	2314.2	1.47
3/3V950	3	95	2413	96.11	2441.2	1.56
3/3V1000	3	100	2540	101.11	2568.2	1.62
3/3V1060	3	106	2692	107.11	2720.6	1.74
3/3V1120	3	112	2845	113.11	2873	1.83
3/3V1180	3	118	2997	119.11	3025.4	1.92
3/3V1250	3	125	3175	126.11	3203.2	2.04

3V

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3/3V1320	3	132	3353	133.11	3381	2.16
4/3V450	4	45	1143	46.11	1171.2	1
4/3V475	4	47.5	1207	48.61	1234.7	1.04
4/3V500	4	50	1270	51.11	1298.2	1.08
4/3V530	4	53	1346	54.11	1374.4	1.16
4/3V560	4	56	1422	57.11	1450.6	1.2
4/3V600	4	60	1524	61.11	1552.2	1.32
4/3V630	4	63	1600	64.11	1628.4	1.36
4/3V670	4	67	1702	68.11	1730	1.44
4/3V710	4	71	1803	72.11	1831.6	1.56
4/3V750	4	75	1905	76.11	1933.2	1.64
4/3V800	4	80	2032	81.11	2060.2	1.76
4/3V850	4	85	2159	86.11	2187.2	1.84
4/3V900	4	90	2286	91.11	2314.2	1.96
4/3V950	4	95	2413	96.11	2441.2	2.08
4/3V1000	4	100	2540	101.11	2568.2	2.16
4/3V1060	4	106	2692	107.11	2720.6	2.32
4/3V1120	4	112	2845	113.11	2873	2.44
4/3V1180	4	118	2997	119.11	3025.4	2.56
4/3V1250	4	125	3175	126.11	3203.2	2.72
4/3V1320	4	132	3353	133.11	3381	2.88
4/3V1400	4	140	3556	141.11	3584.2	3.04
5/3V450	5	45	1143	46.11	1171.2	1.25
5/3V475	5	47.5	1207	48.61	1234.7	1.3
5/3V500	5	50	1270	51.11	1298.2	1.35
5/3V530	5	53	1346	54.11	1374.4	1.45
5/3V560	5	56	1422	57.11	1450.6	1.5
5/3V600	5	60	1524	61.11	1552.2	1.65
5/3V630	5	63	1600	64.11	1628.4	1.7
5/3V670	5	67	1702	68.11	1730	1.8
5/3V710	5	71	1803	72.11	1831.6	1.95
5/3V750	5	75	1905	76.11	1933.2	2.05
5/3V800	5	80	2032	81.11	2060.2	2.2
5/3V850	5	85	2159	86.11	2187.2	2.3
5/3V900	5	90	2286	91.11	2314.2	2.45
5/3V950	5	95	2413	96.11	2441.2	2.6
5/3V1000	5	100	2540	101.11	2568.2	2.7
5/3V1060	5	106	2692	107.11	2720.6	2.9
5/3V1120	5	112	2845	113.11	2873	3.05
5/3V1180	5	118	2997	119.11	3025.4	3.2
5/3V1250	5	125	3175	126.11	3203.2	3.4
5/3V1320	5	132	3353	133.11	3381	3.6
5/3V1400	5	140	3556	141.11	3584.2	3.8
6/3V450	6	45	1143	46.11	1171.2	1.5
6/3V475	6	47.5	1207	48.61	1234.7	1.56
6/3V500	6	50	1270	51.11	1298.2	1.62

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



3V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
6/3V530	6	53	1346	54.11	1374.4	1.74
6/3V560	6	56	1422	57.11	1450.6	1.8
6/3V600	6	60	1524	61.11	1552.2	1.98
6/3V630	6	63	1600	64.11	1628.4	2.04
6/3V670	6	67	1702	68.11	1730	2.16
6/3V710	6	71	1803	72.11	1831.6	2.34
6/3V750	6	75	1905	76.11	1933.2	2.46
6/3V800	6	80	2032	81.11	2060.2	2.64
6/3V850	6	85	2159	86.11	2187.2	2.76
6/3V900	6	90	2286	91.11	2314.2	2.94
6/3V950	6	95	2413	96.11	2441.2	3.12
6/3V1000	6	100	2540	101.11	2568.2	3.24
6/3V1060	6	106	2692	107.11	2720.6	3.48
6/3V1120	6	112	2845	113.11	2873	3.66
6/3V1180	6	118	2997	119.11	3025.4	3.84
6/3V1250	6	125	3175	126.11	3203.2	4.08
6/3V1320	6	132	3353	133.11	3381	4.32
6/3V1400	6	140	3556	141.11	3584.2	4.56
7/3V450	7	45	1143	46.11	1171.2	1.75
7/3V475	7	47.5	1207	48.61	1234.7	1.82
7/3V500	7	50	1270	51.11	1298.2	1.89
7/3V530	7	53	1346	54.11	1374.4	2.03
7/3V560	7	56	1422	57.11	1450.6	2.1
7/3V600	7	60	1524	61.11	1552.2	2.31
7/3V630	7	63	1600	64.11	1628.4	2.38
7/3V670	7	67	1702	68.11	1730	2.52
7/3V710	7	71	1803	72.11	1831.6	2.73
7/3V750	7	75	1905	76.11	1933.2	2.87
7/3V800	7	80	2032	81.11	2060.2	3.08
7/3V850	7	85	2159	86.11	2187.2	3.22
7/3V900	7	90	2286	91.11	2314.2	3.43
7/3V950	7	95	2413	96.11	2441.2	3.64
7/3V1000	7	100	2540	101.11	2568.2	3.78
7/3V1060	7	106	2692	107.11	2720.6	4.06
7/3V1120	7	112	2845	113.11	2873	4.27
7/3V1180	7	118	2997	119.11	3025.4	4.48
7/3V1250	7	125	3175	126.11	3203.2	4.76
7/3V1320	7	132	3353	133.11	3381	5.04
7/3V1400	7	140	3556	141.11	3584.2	5.32
8/3V450	8	45	1143	46.11	1171.2	2
8/3V475	8	47.5	1207	48.61	1234.7	2.08
8/3V500	8	50	1270	51.11	1298.2	2.16
8/3V530	8	53	1346	54.11	1374.4	2.32
8/3V560	8	56	1422	57.11	1450.6	2.4
8/3V600	8	60	1524	61.11	1552.2	2.64
8/3V630	8	63	1600	64.11	1628.4	2.72
8/3V670	8	67	1702	68.11	1730	2.88

3V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
8/3V710	8	71	1803	72.11	1831.6	3.12
8/3V750	8	75	1905	76.11	1933.2	3.28
8/3V800	8	80	2032	81.11	2060.2	3.52
8/3V850	8	85	2159	86.11	2187.2	3.68
8/3V900	8	90	2286	91.11	2314.2	3.92
8/3V950	8	95	2413	96.11	2441.2	4.16
8/3V1000	8	100	2540	101.11	2568.2	4.32
8/3V1060	8	106	2692	107.11	2720.6	4.64
8/3V1120	8	112	2845	113.11	2873	4.88
8/3V1180	8	118	2997	119.11	3025.4	5.12
8/3V1250	8	125	3175	126.11	3203.2	5.44
8/3V1320	8	132	3353	133.11	3381	5.76
8/3V1400	8	140	3556	141.11	3584.2	6.08
9/3V450	9	45	1143	46.11	1171.2	2.25
9/3V475	9	47.5	1207	48.61	1234.7	2.34
9/3V500	9	50	1270	51.11	1298.2	2.43
9/3V530	9	53	1346	54.11	1374.4	2.61
9/3V560	9	56	1422	57.11	1450.6	2.7
9/3V600	9	60	1524	61.11	1552.2	2.97
9/3V630	9	63	1600	64.11	1628.4	3.06
9/3V670	9	67	1702	68.11	1730	3.24
9/3V710	9	71	1803	72.11	1831.6	3.51
9/3V750	9	75	1905	76.11	1933.2	3.69
9/3V800	9	80	2032	81.11	2060.2	3.96
9/3V850	9	85	2159	86.11	2187.2	4.14
9/3V900	9	90	2286	91.11	2314.2	4.41
9/3V950	9	95	2413	96.11	2441.2	4.68
9/3V1000	9	100	2540	101.11	2568.2	4.86
9/3V1060	9	106	2692	107.11	2720.6	5.22
9/3V1120	9	112	2845	113.11	2873	5.49
9/3V1180	9	118	2997	119.11	3025.4	5.76
9/3V1250	9	125	3175	126.11	3203.2	6.12
9/3V1320	9	132	3353	133.11	3381	6.48
9/3V1400	9	140	3556	141.11	3584.2	6.84
10/3V450	10	45	1143	46.11	1171.2	2.5
10/3V475	10	47.5	1207	48.61	1234.7	2.6
10/3V500	10	50	1270	51.11	1298.2	2.7
10/3V530	10	53	1346	54.11	1374.4	2.9
10/3V560	10	56	1422	57.11	1450.6	3
10/3V600	10	60	1524	61.11	1552.2	3.3
10/3V630	10	63	1600	64.11	1628.4	3.4
10/3V670	10	67	1702	68.11	1730	3.6
10/3V710	10	71	1803	72.11	1831.6	3.9
10/3V750	10	75	1905	76.11	1933.2	4.1
10/3V800	10	80	2032	81.11	2060.2	4.4
10/3V850	10	85	2159	86.11	2187.2	4.6
10/3V900	10	90	2286	91.11	2314.2	4.9

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



3V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
10/3V950	10	95	2413	96.11	2441.2	5.2
10/3V1000	10	100	2540	101.11	2568.2	5.4
10/3V1060	10	106	2692	107.11	2720.6	5.8
10/3V1120	10	112	2845	113.11	2873	6.1
10/3V1180	10	118	2997	119.11	3025.4	6.4
10/3V1250	10	125	3175	126.11	3203.2	6.8
10/3V1320	10	132	3353	133.11	3381	7.2
10/3V1400	10	140	3556	141.11	3584.2	7.6
11/3V450	11	45	1143	46.11	1171.2	2.75
11/3V475	11	47.5	1207	48.61	1234.7	2.86
11/3V500	11	50	1270	51.11	1298.2	2.97
11/3V530	11	53	1346	54.11	1374.4	3.19
11/3V560	11	56	1422	57.11	1450.6	3.3
11/3V600	11	60	1524	61.11	1552.2	3.63
11/3V630	11	63	1600	64.11	1628.4	3.74
11/3V670	11	67	1702	68.11	1730	3.96
11/3V710	11	71	1803	72.11	1831.6	4.29
11/3V750	11	75	1905	76.11	1933.2	4.51
11/3V800	11	80	2032	81.11	2060.2	4.84
11/3V850	11	85	2159	86.11	2187.2	5.06
11/3V900	11	90	2286	91.11	2314.2	5.39
11/3V950	11	95	2413	96.11	2441.2	5.72
11/3V1000	11	100	2540	101.11	2568.2	5.94
11/3V1060	11	106	2692	107.11	2720.6	6.38
11/3V1120	11	112	2845	113.11	2873	6.71
11/3V1180	11	118	2997	119.11	3025.4	7.04
11/3V1250	11	125	3175	126.11	3203.2	7.48
11/3V1320	11	132	3353	133.11	3381	7.92
11/3V1400	11	140	3556	141.11	3584.2	8.36
12/3V450	12	45	1143	46.11	1171.2	3
12/3V475	12	47.5	1207	48.61	1234.7	3.12
12/3V500	12	50	1270	51.11	1298.2	3.24
12/3V530	12	53	1346	54.11	1374.4	3.48
12/3V560	12	56	1422	57.11	1450.6	3.6
12/3V600	12	60	1524	61.11	1552.2	3.96
12/3V630	12	63	1600	64.11	1628.4	4.08
12/3V670	12	67	1702	68.11	1730	4.32
12/3V710	12	71	1803	72.11	1831.6	4.68
12/3V750	12	75	1905	76.11	1933.2	4.92
12/3V800	12	80	2032	81.11	2060.2	5.28
12/3V850	12	85	2159	86.11	2187.2	5.52
12/3V900	12	90	2286	91.11	2314.2	5.88
12/3V950	12	95	2413	96.11	2441.2	6.24
12/3V1000	12	100	2540	101.11	2568.2	6.48
12/3V1060	12	106	2692	107.11	2720.6	6.96
12/3V1120	12	112	2845	113.11	2873	7.32
12/3V1180	12	118	2997	119.11	3025.4	7.68

3V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
12/3V1250	12	125	3175	126.11	3203.2	8.16
12/3V1320	12	132	3353	133.11	3381	8.64
12/3V1400	12	140	3556	141.11	3584.2	9.12
13/3V450	13	45	1143	46.11	1171.2	3.25
13/3V475	13	47.5	1207	48.61	1234.7	3.38
13/3V500	13	50	1270	51.11	1298.2	3.51
13/3V530	13	53	1346	54.11	1374.4	3.77
13/3V560	13	56	1422	57.11	1450.6	3.9
13/3V600	13	60	1524	61.11	1552.2	4.29
13/3V630	13	63	1600	64.11	1628.4	4.42
13/3V670	13	67	1702	68.11	1730	4.68
13/3V710	13	71	1803	72.11	1831.6	5.07
13/3V750	13	75	1905	76.11	1933.2	5.33
13/3V800	13	80	2032	81.11	2060.2	5.72
13/3V850	13	85	2159	86.11	2187.2	5.98
13/3V900	13	90	2286	91.11	2314.2	6.37
13/3V950	13	95	2413	96.11	2441.2	6.76
13/3V1000	13	100	2540	101.11	2568.2	7.02
13/3V1060	13	106	2692	107.11	2720.6	7.54
13/3V1120	13	112	2845	113.11	2873	7.93
13/3V1180	13	118	2997	119.11	3025.4	8.32
13/3V1250	13	125	3175	126.11	3203.2	8.84
13/3V1320	13	132	3353	133.11	3381	9.36
13/3V1400	13	140	3556	141.11	3584.2	9.88
14/3V450	14	45	1143	46.11	1171.2	3.5
14/3V475	14	47.5	1207	48.61	1234.7	3.64
14/3V500	14	50	1270	51.11	1298.2	3.78
14/3V530	14	53	1346	54.11	1374.4	4.06
14/3V560	14	56	1422	57.11	1450.6	4.2
14/3V600	14	60	1524	61.11	1552.2	4.62
14/3V630	14	63	1600	64.11	1628.4	4.76
14/3V670	14	67	1702	68.11	1730	5.04
14/3V710	14	71	1803	72.11	1831.6	5.46
14/3V750	14	75	1905	76.11	1933.2	5.74
14/3V800	14	80	2032	81.11	2060.2	6.16
14/3V850	14	85	2159	86.11	2187.2	6.44
14/3V900	14	90	2286	91.11	2314.2	6.86
14/3V950	14	95	2413	96.11	2441.2	7.28
14/3V1000	14	100	2540	101.11	2568.2	7.56
14/3V1060	14	106	2692	107.11	2720.6	8.12
14/3V1120	14	112	2845	113.11	2873	8.54
14/3V1180	14	118	2997	119.11	3025.4	8.96
14/3V1250	14	125	3175	126.11	3203.2	9.52
14/3V1320	14	132	3353	133.11	3381	10.08
14/3V1400	14	140	3556	141.11	3584.2	10.64
15/3V450	15	45	1143	46.11	1171.2	3.75
15/3V475	15	47.5	1207	48.61	1234.7	3.9

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



3V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
15/3V500	15	50	1270	51.11	1298.2	4.05
15/3V530	15	53	1346	54.11	1374.4	4.35
15/3V560	15	56	1422	57.11	1450.6	4.5
15/3V600	15	60	1524	61.11	1552.2	4.95
15/3V630	15	63	1600	64.11	1628.4	5.1
15/3V670	15	67	1702	68.11	1730	5.4
15/3V710	15	71	1803	72.11	1831.6	5.85
15/3V750	15	75	1905	76.11	1933.2	6.15
15/3V800	15	80	2032	81.11	2060.2	6.6
15/3V850	15	85	2159	86.11	2187.2	6.9
15/3V900	15	90	2286	91.11	2314.2	7.35
15/3V950	15	95	2413	96.11	2441.2	7.8
15/3V1000	15	100	2540	101.11	2568.2	8.1
15/3V1060	15	106	2692	107.11	2720.6	8.7
15/3V1120	15	112	2845	113.11	2873	9.15
15/3V1180	15	118	2997	119.11	3025.4	9.6
15/3V1250	15	125	3175	126.11	3203.2	10.2
15/3V1320	15	132	3353	133.11	3381	10.8
15/3V1400	15	140	3556	141.11	3584.2	11.4
16/3V450	16	45	1143	46.11	1171.2	4
16/3V475	16	47.5	1207	48.61	1234.7	4.16
16/3V500	16	50	1270	51.11	1298.2	4.32
16/3V530	16	53	1346	54.11	1374.4	4.64
16/3V560	16	56	1422	57.11	1450.6	4.8
16/3V600	16	60	1524	61.11	1552.2	5.28
16/3V630	16	63	1600	64.11	1628.4	5.44
16/3V670	16	67	1702	68.11	1730	5.76
16/3V710	16	71	1803	72.11	1831.6	6.24
16/3V750	16	75	1905	76.11	1933.2	6.56
16/3V800	16	80	2032	81.11	2060.2	7.04
16/3V850	16	85	2159	86.11	2187.2	7.36
16/3V900	16	90	2286	91.11	2314.2	7.84
16/3V950	16	95	2413	96.11	2441.2	8.32
16/3V1000	16	100	2540	101.11	2568.2	8.64
16/3V1060	16	106	2692	107.11	2720.6	9.28
16/3V1120	16	112	2845	113.11	2873	9.76
16/3V1180	16	118	2997	119.11	3025.4	10.24
16/3V1250	16	125	3175	126.11	3203.2	10.88
16/3V1320	16	132	3353	133.11	3381	11.52
16/3V1400	16	140	3556	141.11	3584.2	12.16
17/3V450	17	45	1143	46.11	1171.2	4.25
17/3V475	17	47.5	1207	48.61	1234.7	4.42
17/3V500	17	50	1270	51.11	1298.2	4.59
17/3V530	17	53	1346	54.11	1374.4	4.93
17/3V560	17	56	1422	57.11	1450.6	5.1
17/3V600	17	60	1524	61.11	1552.2	5.61
17/3V630	17	63	1600	64.11	1628.4	5.78

3V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
17/3V670	17	67	1702	68.11	1730	6.12
17/3V710	17	71	1803	72.11	1831.6	6.63
17/3V750	17	75	1905	76.11	1933.2	6.97
17/3V800	17	80	2032	81.11	2060.2	7.48
17/3V850	17	85	2159	86.11	2187.2	7.82
17/3V900	17	90	2286	91.11	2314.2	8.33
17/3V950	17	95	2413	96.11	2441.2	8.84
17/3V1000	17	100	2540	101.11	2568.2	9.18
17/3V1060	17	106	2692	107.11	2720.6	9.86
17/3V1120	17	112	2845	113.11	2873	10.37
17/3V1180	17	118	2997	119.11	3025.4	10.88
17/3V1250	17	125	3175	126.11	3203.2	11.56
17/3V1320	17	132	3353	133.11	3381	12.24
17/3V1400	17	140	3556	141.11	3584.2	12.92
18/3V450	18	45	1143	46.11	1171.2	4.5
18/3V475	18	47.5	1207	48.61	1234.7	4.68
18/3V500	18	50	1270	51.11	1298.2	4.86
18/3V530	18	53	1346	54.11	1374.4	5.22
18/3V560	18	56	1422	57.11	1450.6	5.4
18/3V600	18	60	1524	61.11	1552.2	5.94
18/3V630	18	63	1600	64.11	1628.4	6.12
18/3V670	18	67	1702	68.11	1730	6.48
18/3V710	18	71	1803	72.11	1831.6	7.02
18/3V750	18	75	1905	76.11	1933.2	7.38
18/3V800	18	80	2032	81.11	2060.2	7.92
18/3V850	18	85	2159	86.11	2187.2	8.28
18/3V900	18	90	2286	91.11	2314.2	8.82
18/3V950	18	95	2413	96.11	2441.2	9.36
18/3V1000	18	100	2540	101.11	2568.2	9.72
18/3V1060	18	106	2692	107.11	2720.6	10.44
18/3V1120	18	112	2845	113.11	2873	10.98
18/3V1180	18	118	2997	119.11	3025.4	11.52
18/3V1250	18	125	3175	126.11	3203.2	12.24
18/3V1320	18	132	3353	133.11	3381	12.96
18/3V1400	18	140	3556	141.11	3584.2	13.68
19/3V450	19	45	1143	46.11	1171.2	4.75
19/3V475	19	47.5	1207	48.61	1234.7	4.94
19/3V500	19	50	1270	51.11	1298.2	5.13
19/3V530	19	53	1346	54.11	1374.4	5.51
19/3V560	19	56	1422	57.11	1450.6	5.7
19/3V600	19	60	1524	61.11	1552.2	6.27
19/3V630	19	63	1600	64.11	1628.4	6.46
19/3V670	19	67	1702	68.11	1730	6.84
19/3V710	19	71	1803	72.11	1831.6	7.41
19/3V750	19	75	1905	76.11	1933.2	7.79
19/3V800	19	80	2032	81.11	2060.2	8.36
19/3V850	19	85	2159	86.11	2187.2	8.74

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



3V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
19/3V900	19	90	2286	91.11	2314.2	9.31
19/3V950	19	95	2413	96.11	2441.2	9.88
19/3V1000	19	100	2540	101.11	2568.2	10.26
19/3V1060	19	106	2692	107.11	2720.6	11.02
19/3V1120	19	112	2845	113.11	2873	11.59
19/3V1180	19	118	2997	119.11	3025.4	12.16
19/3V1250	19	125	3175	126.11	3203.2	12.92
19/3V1320	19	132	3353	133.11	3381	13.68
19/3V1400	19	140	3556	141.11	3584.2	14.44
20/3V450	20	45	1143	46.11	1171.2	5
20/3V475	20	47.5	1207	48.61	1234.7	5.2
20/3V500	20	50	1270	51.11	1298.2	5.4
20/3V530	20	53	1346	54.11	1374.4	5.8
20/3V560	20	56	1422	57.11	1450.6	6
20/3V600	20	60	1524	61.11	1552.2	6.6
20/3V630	20	63	1600	64.11	1628.4	6.8
20/3V670	20	67	1702	68.11	1730	7.2
20/3V710	20	71	1803	72.11	1831.6	7.8
20/3V750	20	75	1905	76.11	1933.2	8.2
20/3V800	20	80	2032	81.11	2060.2	8.8
20/3V850	20	85	2159	86.11	2187.2	9.2
20/3V900	20	90	2286	91.11	2314.2	9.8
20/3V950	20	95	2413	96.11	2441.2	10.4
20/3V1000	20	100	2540	101.11	2568.2	10.8
20/3V1060	20	106	2692	107.11	2720.6	11.6
20/3V1120	20	112	2845	113.11	2873	12.2
20/3V1180	20	118	2997	119.11	3025.4	12.8
20/3V1250	20	125	3175	126.11	3203.2	13.6
20/3V1320	20	132	3353	133.11	3381	14.4
20/3V1400	20	140	3556	141.11	3584.2	15.2
21/3V450	21	45	1143	46.11	1171.2	5.25
21/3V475	21	47.5	1207	48.61	1234.7	5.46
21/3V500	21	50	1270	51.11	1298.2	5.67
21/3V530	21	53	1346	54.11	1374.4	6.09
21/3V560	21	56	1422	57.11	1450.6	6.3
21/3V600	21	60	1524	61.11	1552.2	6.93
21/3V630	21	63	1600	64.11	1628.4	7.14
21/3V670	21	67	1702	68.11	1730	7.56
21/3V710	21	71	1803	72.11	1831.6	8.19
21/3V750	21	75	1905	76.11	1933.2	8.61
21/3V800	21	80	2032	81.11	2060.2	9.24
21/3V850	21	85	2159	86.11	2187.2	9.66
21/3V900	21	90	2286	91.11	2314.2	10.29
21/3V950	21	95	2413	96.11	2441.2	10.92
21/3V1000	21	100	2540	101.11	2568.2	11.34
21/3V1060	21	106	2692	107.11	2720.6	12.18
21/3V1120	21	112	2845	113.11	2873	12.81

3V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
21/3V1180	21	118	2997	119.11	3025.4	13.44
21/3V1250	21	125	3175	126.11	3203.2	14.28
21/3V1320	21	132	3353	133.11	3381	15.12
21/3V1400	21	140	3556	141.11	3584.2	15.96
22/3V450	22	45	1143	46.11	1171.2	5.5
22/3V475	22	47.5	1207	48.61	1234.7	5.72
22/3V500	22	50	1270	51.11	1298.2	5.94
22/3V530	22	53	1346	54.11	1374.4	6.38
22/3V560	22	56	1422	57.11	1450.6	6.6
22/3V600	22	60	1524	61.11	1552.2	7.26
22/3V630	22	63	1600	64.11	1628.4	7.48
22/3V670	22	67	1702	68.11	1730	7.92
22/3V710	22	71	1803	72.11	1831.6	8.58
22/3V750	22	75	1905	76.11	1933.2	9.02
22/3V800	22	80	2032	81.11	2060.2	9.68
22/3V850	22	85	2159	86.11	2187.2	10.12
22/3V900	22	90	2286	91.11	2314.2	10.78
22/3V950	22	95	2413	96.11	2441.2	11.44
22/3V1000	22	100	2540	101.11	2568.2	11.88
22/3V1060	22	106	2692	107.11	2720.6	12.76
22/3V1120	22	112	2845	113.11	2873	13.42
22/3V1180	22	118	2997	119.11	3025.4	14.08
22/3V1250	22	125	3175	126.11	3203.2	14.96
22/3V1320	22	132	3353	133.11	3381	15.84
22/3V1400	22	140	3556	141.11	3584.2	16.72
23/3V800	23	80	2032	81.11	2060.2	10.12
23/3V850	23	85	2159	86.11	2187.2	10.58
23/3V900	23	90	2286	91.11	2314.2	11.27
23/3V950	23	95	2413	96.11	2441.2	11.96
23/3V1000	23	100	2540	101.11	2568.2	12.42
23/3V1060	23	106	2692	107.11	2720.6	13.34
23/3V1120	23	112	2845	113.11	2873	14.03
23/3V1180	23	118	2997	119.11	3025.4	14.72
23/3V1250	23	125	3175	126.11	3203.2	15.64
23/3V1320	23	132	3353	133.11	3381	16.56
23/3V1400	23	140	3556	141.11	3584.2	17.48
24/3V800	24	80	2032	81.11	2060.2	10.56
24/3V900	24	90	2286	91.11	2314.2	11.76
24/3V950	24	95	2413	96.11	2441.2	12.48
24/3V1000	24	100	2540	101.11	2568.2	12.96
24/3V1060	24	106	2692	107.11	2720.6	13.92
24/3V1120	24	112	2845	113.11	2873	14.64
24/3V1180	24	118	2997	119.11	3025.4	15.36
24/3V1250	24	125	3175	126.11	3203.2	16.32
24/3V1320	24	132	3353	133.11	3381	17.28
24/3V1400	24	140	3556	141.11	3584.2	18.24
25/3V800	25	80	2032	81.11	2060.2	11

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT

3V continue


Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
25/3V850	25	85	2159	86.11	2187.2	11.5
25/3V900	25	90	2286	91.11	2314.2	12.25
25/3V950	25	95	2413	96.11	2441.2	13
25/3V1000	25	100	2540	101.11	2568.2	13.5
25/3V1060	25	106	2692	107.11	2720.6	14.5
25/3V1120	25	112	2845	113.11	2873	15.25
25/3V1180	25	118	2997	119.11	3025.4	16
25/3V1250	25	125	3175	126.11	3203.2	17
25/3V1320	25	132	3353	133.11	3381	18
25/3V1400	25	140	3556	141.11	3584.2	19
26/3V800	26	80	2032	81.11	2060.2	11.44
26/3V850	26	85	2159	86.11	2187.2	11.96
26/3V900	26	90	2286	91.11	2314.2	12.74
26/3V950	26	95	2413	96.11	2441.2	13.52
26/3V1000	26	100	2540	101.11	2568.2	14.04
26/3V1060	26	106	2692	107.11	2720.6	15.08
26/3V1120	26	112	2845	113.11	2873	15.86
26/3V1180	26	118	2997	119.11	3025.4	16.64
26/3V1250	26	125	3175	126.11	3203.2	17.68
26/3V1320	26	132	3353	133.11	3381	18.72
26/3V1400	26	140	3556	141.11	3584.2	19.76
27/3V800	27	80	2032	81.11	2060.2	11.88
27/3V850	27	85	2159	86.11	2187.2	12.42
27/3V900	27	90	2286	91.11	2314.2	13.23
27/3V950	27	95	2413	96.11	2441.2	14.04
27/3V1000	27	100	2540	101.11	2568.2	14.58
27/3V1060	27	106	2692	107.11	2720.6	15.66
27/3V1120	27	112	2845	113.11	2873	16.47
27/3V1180	27	118	2997	119.11	3025.4	17.28
27/3V1250	27	125	3175	126.11	3203.2	18.36
27/3V1320	27	132	3353	133.11	3381	19.44
27/3V1400	27	140	3556	141.11	3584.2	20.52
28/3V800	28	80	2032	81.11	2060.2	12.32
28/3V850	28	85	2159	86.11	2187.2	12.88
28/3V900	28	90	2286	91.11	2314.2	13.72
28/3V950	28	95	2413	96.11	2441.2	14.56
28/3V1000	28	100	2540	101.11	2568.2	15.12
28/3V1060	28	106	2692	107.11	2720.6	16.24
28/3V1120	28	112	2845	113.11	2873	17.08
28/3V1180	28	118	2997	119.11	3025.4	17.92
28/3V1250	28	125	3175	126.11	3203.2	19.04
28/3V1320	28	132	3353	133.11	3381	20.16
28/3V1400	28	140	3556	141.11	3584.2	21.28
29/3V600	29	60	1524	61.11	1552.2	9.57
29/3V800	29	80	2032	81.11	2060.2	12.76
29/3V850	29	85	2159	86.11	2187.2	13.34
29/3V900	29	90	2286	91.11	2314.2	14.21

3V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
29/3V950	29	95	2413	96.11	2441.2	15.08
29/3V1000	29	100	2540	101.11	2568.2	15.66
29/3V1060	29	106	2692	107.11	2720.6	16.82
29/3V1120	29	112	2845	113.11	2873	17.69
29/3V1180	29	118	2997	119.11	3025.4	18.56
29/3V1250	29	125	3175	126.11	3203.2	19.72
29/3V1320	29	132	3353	133.11	3381	20.88
29/3V1400	29	140	3556	141.11	3584.2	22.04
30/3V670	30	67	1702	68.11	1730	10.8
30/3V710	30	71	1803	72.11	1831.6	11.7
30/3V750	30	75	1905	76.11	1933.2	12.3
30/3V800	30	80	2032	81.11	2060.2	13.2
30/3V850	30	85	2159	86.11	2187.2	13.8
30/3V900	30	90	2286	91.11	2314.2	14.7
30/3V950	30	95	2413	96.11	2441.2	15.6
30/3V1000	30	100	2540	101.11	2568.2	16.2
30/3V1060	30	106	2692	107.11	2720.6	17.4
30/3V1120	30	112	2845	113.11	2873	18.3
30/3V1180	30	118	2997	119.11	3025.4	19.2
30/3V1250	30	125	3175	126.11	3203.2	20.4
30/3V1320	30	132	3353	133.11	3381	21.6
30/3V1400	30	140	3556	141.11	3584.2	22.8

BELT PART NUMBER NOMENCLATURE

Belt No: 2/5V500
5V - Profile
500 - Inside Circumference
(Inches in tenths: 50.0")



5V

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/5V500	2	50	1270	51.36	1304.5	1.44
2/5V530	2	53	1346	54.36	1380.7	1.52
2/5V560	2	56	1422	57.36	1456.9	1.6
2/5V600	2	60	1524	61.36	1558.5	1.72
2/5V630	2	63	1600	64.36	1634.7	1.8
2/5V670	2	67	1702	68.36	1736.3	1.92
2/5V710	2	71	1803	72.36	1837.9	2.04
2/5V750	2	75	1905	76.36	1939.5	2.14
2/5V800	2	80	2032	81.36	2066.5	2.3
2/5V850	2	85	2159	86.36	2193.5	2.44
2/5V900	2	90	2286	91.36	2320.5	2.58
2/5V950	2	95	2413	96.36	2447.5	2.72
2/5V1000	2	100	2540	101.36	2574.5	2.86

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



5V						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/5V1060	2	106	2692	107.36	2726.9	3.04
2/5V1120	2	112	2845	113.36	2879.3	3.2
2/5V1180	2	118	2997	119.36	3031.7	3.38
2/5V1200	2	120	3048	121.36	3082.5	3.44
2/5V1210	2	121	3073	122.36	3107.9	3.46
2/5V1250	2	125	3175	126.36	3209.5	3.58
2/5V1320	2	132	3353	133.36	3387.3	3.78
2/5V1400	2	140	3556	141.36	3590.5	4.02
2/5V1500	2	150	3810	151.36	3844.5	4.3
2/5V1505	2	150.5	3823	151.86	3850	8.6
2/5V1600	2	160	4064	161.36	4098.5	4.58
2/5V1700	2	170	4318	171.36	4352.5	4.88
2/5V1800	2	180	4572	181.36	4606.5	5.16
2/5V1900	2	190	4826	191.36	4860.5	5.44
2/5V2000	2	200	5080	201.36	5114.5	5.74
2/5V2120	2	212	5385	213.36	5419.3	6.08
2/5V2240	2	224	5690	225.36	5724.1	6.42
2/5V2360	2	236	5994	237.36	6028.9	6.76
2/5V2500	2	250	6350	251.36	6384.5	7.16
2/5V2650	2	265	6731	266.36	6765.5	7.6
2/5V2800	2	280	7112	281.36	7146.5	8.02
2/5V3000	2	300	7620	301.36	7654.5	8.6
2/5V1800	2	180	4572	181.36	4606.5	5.16
2/5V1900	2	190	4826	191.36	4860.5	5.44
2/5V2000	2	200	5080	201.36	5114.5	5.74
2/5V2120	2	212	5385	213.36	5419.3	6.08
2/5V2240	2	224	5690	225.36	5724.1	6.42
2/5V2360	2	236	5994	237.36	6028.9	6.76
2/5V2500	2	250	6350	251.36	6384.5	7.16
2/5V2650	2	265	6731	266.36	6765.5	7.6
2/5V2800	2	280	7112	281.36	7146.5	8.02
2/5V3000	2	300	7620	301.36	7654.5	8.6
2/5V3150	2	315	8001	316.36	8035.5	9.02
2/5V3350	2	335	8509	336.36	8543.5	9.6
2/5V3550	2	355	9017	356.36	9051.5	10.18
3/5V500	3	50	1270	51.36	1304.5	2.16
3/5V530	3	53	1346	54.36	1380.7	2.28
3/5V560	3	56	1422	57.36	1456.9	2.4
3/5V600	3	60	1524	61.36	1558.5	2.58
3/5V630	3	63	1600	64.36	1634.7	2.7
3/5V670	3	67	1702	68.36	1736.3	2.88
3/5V710	3	71	1803	72.36	1837.9	3.06
3/5V3150	3	315	8001	316.36	8035.5	13.53
3/5V3350	3	335	8509	336.36	8543.5	14.4
3/5V3550	3	355	9017	356.36	9051.5	15.27
4/5V500	4	50	1270	51.36	1304.5	2.88
4/5V530	4	53	1346	54.36	1380.7	3.04

5V						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
4/5V560	4	56	1422	57.36	1456.9	3.2
4/5V600	4	60	1524	61.36	1558.5	3.44
4/5V630	4	63	1600	64.36	1634.7	3.6
4/5V670	4	67	1702	68.36	1736.3	3.84
4/5V710	4	71	1803	72.36	1837.9	4.08
4/5V750	4	75	1905	76.36	1939.5	4.28
4/5V800	4	80	2032	81.36	2066.5	4.6
4/5V850	4	85	2159	86.36	2193.5	4.88
4/5V900	4	90	2286	91.36	2320.5	5.16
4/5V950	4	95	2413	96.36	2447.5	5.44
4/5V1000	4	100	2540	101.36	2574.5	5.72
4/5V1060	4	106	2692	107.36	2726.9	6.08
4/5V1120	4	112	2845	113.36	2879.3	6.4
4/5V1180	4	118	2997	119.36	3031.7	6.76
4/5V1200	4	120	3048	121.36	3082.5	6.88
4/5V1210	4	121	3073	122.36	3107.9	6.92
4/5V1250	4	125	3175	126.36	3209.5	7.16
4/5V1320	4	132	3353	133.36	3387.3	7.56
4/5V1400	4	140	3556	141.36	3590.5	8.04
4/5V1500	4	150	3810	151.36	3844.5	8.6
4/5V1505	4	150.5	3823	151.86	3850	8.6
4/5V1600	4	160	4064	161.36	4098.5	9.16
4/5V1700	4	170	4318	171.36	4352.5	9.76
4/5V1800	4	180	4572	181.36	4606.5	10.32
4/5V1900	4	190	4826	191.36	4860.5	10.88
4/5V2000	4	200	5080	201.36	5114.5	11.48
4/5V2120	4	212	5385	213.36	5419.3	12.16
4/5V2240	4	224	5690	225.36	5724.1	12.84
4/5V2360	4	236	5994	237.36	6028.9	13.52
4/5V2500	4	250	6350	251.36	6384.5	14.32
4/5V2650	4	265	6731	266.36	6765.5	15.2
4/5V2800	4	280	7112	281.36	7146.5	16.04
4/5V3000	4	300	7620	301.36	7654.5	17.2
4/5V3150	4	315	8001	316.36	8035.5	18.04
4/5V3350	4	335	8509	336.36	8543.5	19.2
4/5V3550	4	355	9017	356.36	9051.5	20.36
5/5V500	5	50	1270	51.36	1304.5	3.6
5/5V530	5	53	1346	54.36	1380.7	3.8
5/5V560	5	56	1422	57.36	1456.9	4
5/5V600	5	60	1524	61.36	1558.5	4.3
5/5V630	5	63	1600	64.36	1634.7	4.5
5/5V670	5	67	1702	68.36	1736.3	4.8
5/5V710	5	71	1803	72.36	1837.9	5.1
5/5V750	5	75	1905	76.36	1939.5	5.35
5/5V800	5	80	2032	81.36	2066.5	5.75
5/5V850	5	85	2159	86.36	2193.5	6.1
5/5V900	5	90	2286	91.36	2320.5	6.45

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
5/5V950	5	95	2413	96.36	2447.5	6.8
5/5V1000	5	100	2540	101.36	2574.5	7.15
5/5V1060	5	106	2692	107.36	2726.9	7.6
5/5V1120	5	112	2845	113.36	2879.3	8
5/5V1180	5	118	2997	119.36	3031.7	8.45
5/5V1200	5	120	3048	121.36	3082.5	8.6
5/5V1210	5	121	3073	122.36	3107.9	8.65
5/5V1250	5	125	3175	126.36	3209.5	8.95
5/5V1320	5	132	3353	133.36	3387.3	9.45
5/5V1400	5	140	3556	141.36	3590.5	10.05
5/5V1500	5	150	3810	151.36	3844.5	10.75
5/5V1600	5	160	4064	161.36	4098.5	11.45
5/5V1700	5	170	4318	171.36	4352.5	12.2
5/5V1800	5	180	4572	181.36	4606.5	12.9
5/5V1900	5	190	4826	191.36	4860.5	13.6
5/5V2000	5	200	5080	201.36	5114.5	14.35
5/5V2120	5	212	5385	213.36	5419.3	15.2
5/5V2240	5	224	5690	225.36	5724.1	16.05
5/5V2360	5	236	5994	237.36	6028.9	16.9
5/5V2500	5	250	6350	251.36	6384.5	17.9
5/5V2650	5	265	6731	266.36	6765.5	19
5/5V2800	5	280	7112	281.36	7146.5	20.05
5/5V3000	5	300	7620	301.36	7654.5	21.5
5/5V3150	5	315	8001	316.36	8035.5	22.55
5/5V3350	5	335	8509	336.36	8543.5	24
5/5V3550	5	355	9017	356.36	9051.5	25.45
6/5V500	6	50	1270	51.36	1304.5	4.32
6/5V530	6	53	1346	54.36	1380.7	4.56
6/5V560	6	56	1422	57.36	1456.9	4.8
6/5V600	6	60	1524	61.36	1558.5	5.16
6/5V630	6	63	1600	64.36	1634.7	5.4
6/5V670	6	67	1702	68.36	1736.3	5.76
6/5V710	6	71	1803	72.36	1837.9	6.12
6/5V750	6	75	1905	76.36	1939.5	6.42
6/5V800	6	80	2032	81.36	2066.5	6.9
6/5V850	6	85	2159	86.36	2193.5	7.32
6/5V900	6	90	2286	91.36	2320.5	7.74
6/5V950	6	95	2413	96.36	2447.5	8.16
6/5V1000	6	100	2540	101.36	2574.5	8.58
6/5V1060	6	106	2692	107.36	2726.9	9.12
6/5V1120	6	112	2845	113.36	2879.3	9.6
6/5V1180	6	118	2997	119.36	3031.7	10.14
6/5V1200	6	120	3048	121.36	3082.5	10.32
6/5V1210	6	121	3073	122.36	3107.9	10.38
6/5V1250	6	125	3175	126.36	3209.5	10.74
6/5V1320	6	132	3353	133.36	3387.3	11.34
6/5V1400	6	140	3556	141.36	3590.5	12.06

5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
6/5V1500	6	150	3810	151.36	3844.5	12.9
6/5V1600	6	160	4064	161.36	4098.5	13.74
6/5V1700	6	170	4318	171.36	4352.5	14.64
6/5V1800	6	180	4572	181.36	4606.5	15.48
6/5V1900	6	190	4826	191.36	4860.5	16.32
6/5V2000	6	200	5080	201.36	5114.5	17.22
6/5V2120	6	212	5385	213.36	5419.3	18.24
6/5V2240	6	224	5690	225.36	5724.1	19.26
6/5V2360	6	236	5994	237.36	6028.9	20.28
6/5V2500	6	250	6350	251.36	6384.5	21.48
6/5V2650	6	265	6731	266.36	6765.5	22.8
6/5V2800	6	280	7112	281.36	7146.5	24.06
6/5V3000	6	300	7620	301.36	7654.5	25.8
6/5V3150	6	315	8001	316.36	8035.5	27.06
6/5V3350	6	335	8509	336.36	8543.5	28.8
6/5V3550	6	355	9017	356.36	9051.5	30.54
7/5V500	7	50	1270	51.36	1304.5	5.04
7/5V530	7	53	1346	54.36	1380.7	5.32
7/5V560	7	56	1422	57.36	1456.9	5.6
7/5V600	7	60	1524	61.36	1558.5	6.02
7/5V630	7	63	1600	64.36	1634.7	6.3
7/5V670	7	67	1702	68.36	1736.3	6.72
7/5V710	7	71	1803	72.36	1837.9	7.14
7/5V750	7	75	1905	76.36	1939.5	7.49
7/5V800	7	80	2032	81.36	2066.5	8.05
7/5V850	7	85	2159	86.36	2193.5	8.54
7/5V900	7	90	2286	91.36	2320.5	9.03
7/5V950	7	95	2413	96.36	2447.5	9.52
7/5V1000	7	100	2540	101.36	2574.5	10.01
7/5V1060	7	106	2692	107.36	2726.9	10.64
7/5V1120	7	112	2845	113.36	2879.3	11.2
7/5V1180	7	118	2997	119.36	3031.7	11.83
7/5V1200	7	120	3048	121.36	3082.5	12.04
7/5V1210	7	121	3073	122.36	3107.9	12.11
7/5V1250	7	125	3175	126.36	3209.5	12.53
7/5V1320	7	132	3353	133.36	3387.3	13.23
7/5V1400	7	140	3556	141.36	3590.5	14.07
7/5V1500	7	150	3810	151.36	3844.5	15.05
7/5V1600	7	160	4064	161.36	4098.5	16.03
7/5V1700	7	170	4318	171.36	4352.5	17.08
7/5V1800	7	180	4572	181.36	4606.5	18.06
7/5V1900	7	190	4826	191.36	4860.5	19.04
7/5V2000	7	200	5080	201.36	5114.5	20.09
7/5V2120	7	212	5385	213.36	5419.3	21.28
7/5V2240	7	224	5690	225.36	5724.1	22.47
7/5V2360	7	236	5994	237.36	6028.9	23.66
7/5V2500	7	250	6350	251.36	6384.5	25.06

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
7/5V2650	7	265	6731	266.36	6765.5	26.6
7/5V2800	7	280	7112	281.36	7146.5	28.07
7/5V3000	7	300	7620	301.36	7654.5	30.1
7/5V3150	7	315	8001	316.36	8035.5	31.57
7/5V3350	7	335	8509	336.36	8543.5	33.6
7/5V3550	7	355	9017	356.36	9051.5	35.63
8/5V500	8	50	1270	51.36	1304.5	5.76
8/5V530	8	53	1346	54.36	1380.7	6.08
8/5V560	8	56	1422	57.36	1456.9	6.4
8/5V600	8	60	1524	61.36	1558.5	6.88
8/5V630	8	63	1600	64.36	1634.7	7.2
8/5V670	8	67	1702	68.36	1736.3	7.68
8/5V710	8	71	1803	72.36	1837.9	8.16
8/5V750	8	75	1905	76.36	1939.5	8.56
8/5V800	8	80	2032	81.36	2066.5	9.2
8/5V850	8	85	2159	86.36	2193.5	9.76
8/5V900	8	90	2286	91.36	2320.5	10.32
8/5V950	8	95	2413	96.36	2447.5	10.88
8/5V1000	8	100	2540	101.36	2574.5	11.44
8/5V1060	8	106	2692	107.36	2726.9	12.16
8/5V1120	8	112	2845	113.36	2879.3	12.8
8/5V1180	8	118	2997	119.36	3031.7	13.52
8/5V1200	8	120	3048	121.36	3082.5	13.76
8/5V1210	8	121	3073	122.36	3107.9	13.84
8/5V1250	8	125	3175	126.36	3209.5	14.32
8/5V1320	8	132	3353	133.36	3387.3	15.12
8/5V1400	8	140	3556	141.36	3590.5	16.08
8/5V1500	8	150	3810	151.36	3844.5	17.2
8/5V1600	8	160	4064	161.36	4098.5	18.32
8/5V1700	8	170	4318	171.36	4352.5	19.52
8/5V1800	8	180	4572	181.36	4606.5	20.64
8/5V1900	8	190	4826	191.36	4860.5	21.76
8/5V2000	8	200	5080	201.36	5114.5	22.96
8/5V2120	8	212	5385	213.36	5419.3	24.32
8/5V2240	8	224	5690	225.36	5724.1	25.68
8/5V2360	8	236	5994	237.36	6028.9	27.04
8/5V2500	8	250	6350	251.36	6384.5	28.64
8/5V2650	8	265	6731	266.36	6765.5	30.4
8/5V2800	8	280	7112	281.36	7146.5	32.08
8/5V3000	8	300	7620	301.36	7654.5	34.4
8/5V3150	8	315	8001	316.36	8035.5	36.08
8/5V3350	8	335	8509	336.36	8543.5	38.4
8/5V3550	8	355	9017	356.36	9051.5	40.72
9/5V500	9	50	1270	51.36	1304.5	6.48
9/5V530	9	53	1346	54.36	1380.7	6.84
9/5V560	9	56	1422	57.36	1456.9	7.2
9/5V600	9	60	1524	61.36	1558.5	7.74

5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
9/5V630	9	63	1600	64.36	1634.7	8.1
9/5V670	9	67	1702	68.36	1736.3	8.64
9/5V710	9	71	1803	72.36	1837.9	9.18
9/5V750	9	75	1905	76.36	1939.5	9.63
9/5V800	9	80	2032	81.36	2066.5	10.35
9/5V850	9	85	2159	86.36	2193.5	10.98
9/5V900	9	90	2286	91.36	2320.5	11.61
9/5V950	9	95	2413	96.36	2447.5	12.24
9/5V1000	9	100	2540	101.36	2574.5	12.87
9/5V1060	9	106	2692	107.36	2726.9	13.68
9/5V1120	9	112	2845	113.36	2879.3	14.4
9/5V1180	9	118	2997	119.36	3031.7	15.21
9/5V1200	9	120	3048	121.36	3082.5	15.48
9/5V1210	9	121	3073	122.36	3107.9	15.57
9/5V1250	9	125	3175	126.36	3209.5	16.11
9/5V1320	9	132	3353	133.36	3387.3	17.01
9/5V1400	9	140	3556	141.36	3590.5	18.09
9/5V1500	9	150	3810	151.36	3844.5	19.35
9/5V1600	9	160	4064	161.36	4098.5	20.61
9/5V1700	9	170	4318	171.36	4352.5	21.96
9/5V1800	9	180	4572	181.36	4606.5	23.22
9/5V1900	9	190	4826	191.36	4860.5	24.48
9/5V2000	9	200	5080	201.36	5114.5	25.83
9/5V2120	9	212	5385	213.36	5419.3	27.36
9/5V2240	9	224	5690	225.36	5724.1	28.89
9/5V2360	9	236	5994	237.36	6028.9	30.42
9/5V2500	9	250	6350	251.36	6384.5	32.22
9/5V2650	9	265	6731	266.36	6765.5	34.2
9/5V2800	9	280	7112	281.36	7146.5	36.09
9/5V1500	9	150	3810	151.36	3844.5	19.35
9/5V1600	9	160	4064	161.36	4098.5	20.61
9/5V1700	9	170	4318	171.36	4352.5	21.96
9/5V1800	9	180	4572	181.36	4606.5	23.22
9/5V1900	9	190	4826	191.36	4860.5	24.48
9/5V2000	9	200	5080	201.36	5114.5	25.83
9/5V2120	9	212	5385	213.36	5419.3	27.36
9/5V2240	9	224	5690	225.36	5724.1	28.89
9/5V2360	9	236	5994	237.36	6028.9	30.42
9/5V1500	9	150	3810	151.36	3844.5	19.35
9/5V1600	9	160	4064	161.36	4098.5	20.61
9/5V1700	9	170	4318	171.36	4352.5	21.96
9/5V1800	9	180	4572	181.36	4606.5	23.22
9/5V1900	9	190	4826	191.36	4860.5	24.48
9/5V2000	9	200	5080	201.36	5114.5	25.83
9/5V2120	9	212	5385	213.36	5419.3	27.36
9/5V2240	9	224	5690	225.36	5724.1	28.89
9/5V2360	9	236	5994	237.36	6028.9	30.42

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
9/5V2500	9	250	6350	251.36	6384.5	32.22
9/5V2650	9	265	6731	266.36	6765.5	34.2
9/5V2800	9	280	7112	281.36	7146.5	36.09
9/5V3000	9	300	7620	301.36	7654.5	38.7
9/5V3150	9	315	8001	316.36	8035.5	40.59
9/5V3350	9	335	8509	336.36	8543.5	43.2
9/5V3550	9	355	9017	356.36	9051.5	45.81
10/5V500	10	50	1270	51.36	1304.5	7.2
10/5V530	10	53	1346	54.36	1380.7	7.6
10/5V560	10	56	1422	57.36	1456.9	8
10/5V600	10	60	1524	61.36	1558.5	8.6
10/5V630	10	63	1600	64.36	1634.7	9
10/5V670	10	67	1702	68.36	1736.3	9.6
10/5V710	10	71	1803	72.36	1837.9	10.2
10/5V750	10	75	1905	76.36	1939.5	10.7
10/5V800	10	80	2032	81.36	2066.5	11.5
10/5V850	10	85	2159	86.36	2193.5	12.2
10/5V900	10	90	2286	91.36	2320.5	12.9
10/5V950	10	95	2413	96.36	2447.5	13.6
10/5V1000	10	100	2540	101.36	2574.5	14.3
10/5V1060	10	106	2692	107.36	2726.9	15.2
10/5V1120	10	112	2845	113.36	2879.3	16
10/5V1180	10	118	2997	119.36	3031.7	16.9
10/5V1200	10	120	3048	121.36	3082.5	17.2
10/5V1210	10	121	3073	122.36	3107.9	17.3
10/5V1250	10	125	3175	126.36	3209.5	17.9
10/5V1320	10	132	3353	133.36	3387.3	18.9
10/5V1400	10	140	3556	141.36	3590.5	20.1
10/5V1500	10	150	3810	151.36	3844.5	21.5
10/5V1600	10	160	4064	161.36	4098.5	22.9
10/5V1700	10	170	4318	171.36	4352.5	24.4
10/5V1800	10	180	4572	181.36	4606.5	25.8
10/5V1900	10	190	4826	191.36	4860.5	27.2
10/5V2000	10	200	5080	201.36	5114.5	28.7
10/5V2120	10	212	5385	213.36	5419.3	30.4
10/5V2240	10	224	5690	225.36	5724.1	32.1
10/5V2360	10	236	5994	237.36	6028.9	33.8
10/5V2500	10	250	6350	251.36	6384.5	35.8
10/5V2650	10	265	6731	266.36	6765.5	38
10/5V2800	10	280	7112	281.36	7146.5	40.1
10/5V3000	10	300	7620	301.36	7654.5	43
10/5V3150	10	315	8001	316.36	8035.5	45.1
10/5V3350	10	335	8509	336.36	8543.5	48
10/5V3550	10	355	9017	356.36	9051.5	50.9
11/5V500	11	50	1270	51.36	1304.5	7.92
11/5V530	11	53	1346	54.36	1380.7	8.36
11/5V560	11	56	1422	57.36	1456.9	8.8

5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
11/5V600	11	60	1524	61.36	1558.5	9.46
11/5V630	11	63	1600	64.36	1634.7	9.9
11/5V670	11	67	1702	68.36	1736.3	10.56
11/5V710	11	71	1803	72.36	1837.9	11.22
11/5V750	11	75	1905	76.36	1939.5	11.77
11/5V800	11	80	2032	81.36	2066.5	12.65
11/5V850	11	85	2159	86.36	2193.5	13.42
11/5V900	11	90	2286	91.36	2320.5	14.19
11/5V950	11	95	2413	96.36	2447.5	14.96
11/5V1000	11	100	2540	101.36	2574.5	15.73
11/5V1060	11	106	2692	107.36	2726.9	16.72
11/5V1120	11	112	2845	113.36	2879.3	17.6
11/5V1180	11	118	2997	119.36	3031.7	18.59
11/5V1200	11	120	3048	121.36	3082.5	18.92
11/5V1210	11	121	3073	122.36	3107.9	19.03
11/5V1250	11	125	3175	126.36	3209.5	19.69
11/5V1320	11	132	3353	133.36	3387.3	20.79
11/5V1400	11	140	3556	141.36	3590.5	22.11
11/5V1500	11	150	3810	151.36	3844.5	23.65
11/5V1600	11	160	4064	161.36	4098.5	25.19
11/5V1700	11	170	4318	171.36	4352.5	26.84
11/5V1800	11	180	4572	181.36	4606.5	28.38
11/5V1900	11	190	4826	191.36	4860.5	29.92
11/5V2000	11	200	5080	201.36	5114.5	31.57
11/5V2120	11	212	5385	213.36	5419.3	33.44
11/5V2240	11	224	5690	225.36	5724.1	35.31
11/5V2360	11	236	5994	237.36	6028.9	37.18
11/5V2500	11	250	6350	251.36	6384.5	39.38
11/5V2650	11	265	6731	266.36	6765.5	41.8
11/5V2800	11	280	7112	281.36	7146.5	44.11
11/5V3000	11	300	7620	301.36	7654.5	47.3
11/5V3150	11	315	8001	316.36	8035.5	49.61
11/5V3350	11	335	8509	336.36	8543.5	52.8
11/5V3550	11	355	9017	356.36	9051.5	55.99
12/5V500	12	50	1270	51.36	1304.5	8.64
12/5V530	12	53	1346	54.36	1380.7	9.12
12/5V560	12	56	1422	57.36	1456.9	9.6
12/5V600	12	60	1524	61.36	1558.5	10.32
12/5V630	12	63	1600	64.36	1634.7	10.8
12/5V670	12	67	1702	68.36	1736.3	11.52
12/5V710	12	71	1803	72.36	1837.9	12.24
12/5V750	12	75	1905	76.36	1939.5	12.84
12/5V800	12	80	2032	81.36	2066.5	13.8
12/5V850	12	85	2159	86.36	2193.5	14.64
12/5V900	12	90	2286	91.36	2320.5	15.48
12/5V950	12	95	2413	96.36	2447.5	16.32
12/5V1000	12	100	2540	101.36	2574.5	17.16

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
12/5V1060	12	106	2692	107.36	2726.9	18.24
12/5V1120	12	112	2845	113.36	2879.3	19.2
12/5V1180	12	118	2997	119.36	3031.7	20.28
12/5V1200	12	120	3048	121.36	3082.5	20.64
12/5V1210	12	121	3073	122.36	3107.9	20.76
12/5V1250	12	125	3175	126.36	3209.5	21.48
12/5V1320	12	132	3353	133.36	3387.3	22.68
12/5V1400	12	140	3556	141.36	3590.5	24.12
12/5V1500	12	150	3810	151.36	3844.5	25.8
12/5V1600	12	160	4064	161.36	4098.5	27.48
12/5V1700	12	170	4318	171.36	4352.5	29.28
12/5V1800	12	180	4572	181.36	4606.5	30.96
12/5V1900	12	190	4826	191.36	4860.5	32.64
12/5V2000	12	200	5080	201.36	5114.5	34.44
12/5V2120	12	212	5385	213.36	5419.3	36.48
12/5V2240	12	224	5690	225.36	5724.1	38.52
12/5V2360	12	236	5994	237.36	6028.9	40.56
12/5V2500	12	250	6350	251.36	6384.5	42.96
12/5V2650	12	265	6731	266.36	6765.5	45.6
12/5V2800	12	280	7112	281.36	7146.5	48.12
12/5V3000	12	300	7620	301.36	7654.5	51.6
12/5V3150	12	315	8001	316.36	8035.5	54.12
12/5V3350	12	335	8509	336.36	8543.5	57.6
12/5V3550	12	355	9017	356.36	9051.5	61.08
13/5V500	13	50	1270	51.36	1304.5	9.36
13/5V530	13	53	1346	54.36	1380.7	9.88
13/5V560	13	56	1422	57.36	1456.9	10.4
13/5V600	13	60	1524	61.36	1558.5	11.18
13/5V630	13	63	1600	64.36	1634.7	11.7
13/5V670	13	67	1702	68.36	1736.3	12.48
13/5V710	13	71	1803	72.36	1837.9	13.26
13/5V750	13	75	1905	76.36	1939.5	13.91
13/5V800	13	80	2032	81.36	2066.5	14.95
13/5V850	13	85	2159	86.36	2193.5	15.86
13/5V900	13	90	2286	91.36	2320.5	16.77
13/5V950	13	95	2413	96.36	2447.5	17.68
13/5V1000	13	100	2540	101.36	2574.5	18.59
13/5V1060	13	106	2692	107.36	2726.9	19.76
13/5V1120	13	112	2845	113.36	2879.3	20.8
13/5V1180	13	118	2997	119.36	3031.7	21.97
13/5V1200	13	120	3048	121.36	3082.5	22.36
13/5V1210	13	121	3073	122.36	3107.9	22.49
13/5V1250	13	125	3175	126.36	3209.5	23.27
13/5V1320	13	132	3353	133.36	3387.3	24.57
13/5V1400	13	140	3556	141.36	3590.5	26.13
13/5V1500	13	150	3810	151.36	3844.5	27.95
13/5V1600	13	160	4064	161.36	4098.5	29.77

5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
13/5V1700	13	170	4318	171.36	4352.5	31.72
13/5V1800	13	180	4572	181.36	4606.5	33.54
13/5V1900	13	190	4826	191.36	4860.5	35.36
13/5V2000	13	200	5080	201.36	5114.5	37.31
13/5V2120	13	212	5385	213.36	5419.3	39.52
13/5V2240	13	224	5690	225.36	5724.1	41.73
13/5V2360	13	236	5994	237.36	6028.9	43.94
13/5V2500	13	250	6350	251.36	6384.5	46.54
13/5V2650	13	265	6731	266.36	6765.5	49.4
13/5V2800	13	280	7112	281.36	7146.5	52.13
13/5V3000	13	300	7620	301.36	7654.5	55.9
13/5V3150	13	315	8001	316.36	8035.5	58.63
13/5V3350	13	335	8509	336.36	8543.5	62.4
13/5V3550	13	355	9017	356.36	9051.5	66.17
14/5V500	14	50	1270	51.36	1304.5	10.08
14/5V530	14	53	1346	54.36	1380.7	10.64
14/5V560	14	56	1422	57.36	1456.9	11.2
14/5V600	14	60	1524	61.36	1558.5	12.04
14/5V630	14	63	1600	64.36	1634.7	12.6
14/5V670	14	67	1702	68.36	1736.3	13.44
14/5V710	14	71	1803	72.36	1837.9	14.28
14/5V750	14	75	1905	76.36	1939.5	14.98
14/5V1800	14	180	4572	181.36	4606.5	36.12
14/5V1900	14	190	4826	191.36	4860.5	38.08
14/5V2000	14	200	5080	201.36	5114.5	40.18
14/5V2120	14	212	5385	213.36	5419.3	42.56
14/5V2240	14	224	5690	225.36	5724.1	44.94
14/5V2360	14	236	5994	237.36	6028.9	47.32
14/5V2500	14	250	6350	251.36	6384.5	50.12
14/5V2650	14	265	6731	266.36	6765.5	53.2
14/5V2800	14	280	7112	281.36	7146.5	56.14
14/5V3000	14	300	7620	301.36	7654.5	60.2
14/5V3150	14	315	8001	316.36	8035.5	63.14
14/5V3350	14	335	8509	336.36	8543.5	67.2
14/5V3550	14	355	9017	356.36	9051.5	71.26
15/5V500	15	50	1270	51.36	1304.5	10.8
15/5V530	15	53	1346	54.36	1380.7	11.4
15/5V560	15	56	1422	57.36	1456.9	12
15/5V600	15	60	1524	61.36	1558.5	12.9
15/5V630	15	63	1600	64.36	1634.7	13.5
15/5V670	15	67	1702	68.36	1736.3	14.4
15/5V710	15	71	1803	72.36	1837.9	15.3
15/5V750	15	75	1905	76.36	1939.5	16.05
15/5V800	15	80	2032	81.36	2066.5	17.25
15/5V850	15	85	2159	86.36	2193.5	18.3
15/5V900	15	90	2286	91.36	2320.5	19.35
15/5V950	15	95	2413	96.36	2447.5	20.4

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
15/5V1000	15	100	2540	101.36	2574.5	21.45
15/5V1060	15	106	2692	107.36	2726.9	22.8
15/5V1120	15	112	2845	113.36	2879.3	24
15/5V1180	15	118	2997	119.36	3031.7	25.35
15/5V1200	15	120	3048	121.36	3082.5	25.8
15/5V1210	15	121	3073	122.36	3107.9	25.95
15/5V1250	15	125	3175	126.36	3209.5	26.85
15/5V1320	15	132	3353	133.36	3387.3	28.35
15/5V1400	15	140	3556	141.36	3590.5	30.15
15/5V1500	15	150	3810	151.36	3844.5	32.25
15/5V1600	15	160	4064	161.36	4098.5	34.35
15/5V1700	15	170	4318	171.36	4352.5	36.6
15/5V1800	15	180	4572	181.36	4606.5	38.7
15/5V1900	15	190	4826	191.36	4860.5	40.8
15/5V2000	15	200	5080	201.36	5114.5	43.05
15/5V2120	15	212	5385	213.36	5419.3	45.6
15/5V2240	15	224	5690	225.36	5724.1	48.15
15/5V2360	15	236	5994	237.36	6028.9	50.7
15/5V2500	15	250	6350	251.36	6384.5	53.7
15/5V2650	15	265	6731	266.36	6765.5	57
15/5V2800	15	280	7112	281.36	7146.5	60.15
15/5V3000	15	300	7620	301.36	7654.5	64.5
15/5V3150	15	315	8001	316.36	8035.5	67.65
15/5V3350	15	335	8509	336.36	8543.5	72
15/5V3550	15	355	9017	356.36	9051.5	76.35
16/5V500	16	50	1270	51.36	1304.5	11.52
16/5V530	16	53	1346	54.36	1380.7	12.16
16/5V560	16	56	1422	57.36	1456.9	12.8
16/5V600	16	60	1524	61.36	1558.5	13.76
16/5V630	16	63	1600	64.36	1634.7	14.4
16/5V670	16	67	1702	68.36	1736.3	15.36
16/5V710	16	71	1803	72.36	1837.9	16.32
16/5V750	16	75	1905	76.36	1939.5	17.12
16/5V800	16	80	2032	81.36	2066.5	18.4
16/5V850	16	85	2159	86.36	2193.5	19.52
16/5V900	16	90	2286	91.36	2320.5	20.64
16/5V950	16	95	2413	96.36	2447.5	21.76
16/5V1000	16	100	2540	101.36	2574.5	22.88
16/5V1060	16	106	2692	107.36	2726.9	24.32
16/5V1120	16	112	2845	113.36	2879.3	25.6
16/5V1180	16	118	2997	119.36	3031.7	27.04
16/5V1200	16	120	3048	121.36	3082.5	27.52
16/5V1210	16	121	3073	122.36	3107.9	27.68
16/5V1250	16	125	3175	126.36	3209.5	28.64
16/5V1320	16	132	3353	133.36	3387.3	30.24
16/5V1400	16	140	3556	141.36	3590.5	32.16
16/5V1500	16	150	3810	151.36	3844.5	34.4

5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
16/5V1600	16	160	4064	161.36	4098.5	36.64
16/5V1700	16	170	4318	171.36	4352.5	39.04
16/5V1800	16	180	4572	181.36	4606.5	41.28
16/5V1900	16	190	4826	191.36	4860.5	43.52
16/5V2000	16	200	5080	201.36	5114.5	45.92
16/5V2120	16	212	5385	213.36	5419.3	48.64
16/5V2240	16	224	5690	225.36	5724.1	51.36
16/5V2360	16	236	5994	237.36	6028.9	54.08
16/5V2500	16	250	6350	251.36	6384.5	57.28
16/5V2650	16	265	6731	266.36	6765.5	60.8
16/5V2800	16	280	7112	281.36	7146.5	64.16
16/5V3000	16	300	7620	301.36	7654.5	68.8
16/5V3150	16	315	8001	316.36	8035.5	72.16
16/5V3350	16	335	8509	336.36	8543.5	76.8
16/5V3550	16	355	9017	356.36	9051.5	81.44
17/5V500	17	50	1270	51.36	1304.5	12.24
17/5V530	17	53	1346	54.36	1380.7	12.92
17/5V560	17	56	1422	57.36	1456.9	13.6
17/5V600	17	60	1524	61.36	1558.5	14.62
17/5V630	17	63	1600	64.36	1634.7	15.3
17/5V670	17	67	1702	68.36	1736.3	16.32
17/5V710	17	71	1803	72.36	1837.9	17.34
17/5V750	17	75	1905	76.36	1939.5	18.19
17/5V800	17	80	2032	81.36	2066.5	19.55
17/5V850	17	85	2159	86.36	2193.5	20.74
17/5V900	17	90	2286	91.36	2320.5	21.93
17/5V950	17	95	2413	96.36	2447.5	23.12
17/5V1000	17	100	2540	101.36	2574.5	24.31
17/5V1060	17	106	2692	107.36	2726.9	25.84
17/5V1120	17	112	2845	113.36	2879.3	27.2
17/5V1180	17	118	2997	119.36	3031.7	28.73
17/5V1200	17	120	3048	121.36	3082.5	29.24
17/5V1210	17	121	3073	122.36	3107.9	29.41
17/5V1250	17	125	3175	126.36	3209.5	30.43
17/5V1320	17	132	3353	133.36	3387.3	32.13
17/5V1400	17	140	3556	141.36	3590.5	34.17
17/5V1500	17	150	3810	151.36	3844.5	36.55
17/5V1600	17	160	4064	161.36	4098.5	38.93
17/5V1700	17	170	4318	171.36	4352.5	41.48
17/5V1800	17	180	4572	181.36	4606.5	43.86
17/5V1900	17	190	4826	191.36	4860.5	46.24
17/5V2000	17	200	5080	201.36	5114.5	48.79
17/5V2120	17	212	5385	213.36	5419.3	51.68
17/5V2240	17	224	5690	225.36	5724.1	54.57
17/5V2360	17	236	5994	237.36	6028.9	57.46
17/5V2500	17	250	6350	251.36	6384.5	60.86


BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT

5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
17/5V2650	17	265	6731	266.36	6765.5	64.6
17/5V2800	17	280	7112	281.36	7146.5	68.17
17/5V3000	17	300	7620	301.36	7654.5	73.1
17/5V3150	17	315	8001	316.36	8035.5	76.67
17/5V3350	17	335	8509	336.36	8543.5	81.6
17/5V3550	17	355	9017	356.36	9051.5	86.53
18/5V500	18	50	1270	51.36	1304.5	12.96
18/5V530	18	53	1346	54.36	1380.7	13.68
18/5V560	18	56	1422	57.36	1456.9	14.4
18/5V600	18	60	1524	61.36	1558.5	15.48
18/5V630	18	63	1600	64.36	1634.7	16.2
18/5V670	18	67	1702	68.36	1736.3	17.28
18/5V710	18	71	1803	72.36	1837.9	18.36
18/5V750	18	75	1905	76.36	1939.5	19.26
18/5V800	18	80	2032	81.36	2066.5	20.7
18/5V850	18	85	2159	86.36	2193.5	21.96
18/5V900	18	90	2286	91.36	2320.5	23.22
18/5V950	18	95	2413	96.36	2447.5	24.48
18/5V1000	18	100	2540	101.36	2574.5	25.74
18/5V1060	18	106	2692	107.36	2726.9	27.36
18/5V1120	18	112	2845	113.36	2879.3	28.8
18/5V1180	18	118	2997	119.36	3031.7	30.42
18/5V1200	18	120	3048	121.36	3082.5	30.96
18/5V1210	18	121	3073	122.36	3107.9	31.14
18/5V1250	18	125	3175	126.36	3209.5	32.22
18/5V1320	18	132	3353	133.36	3387.3	34.02
18/5V1400	18	140	3556	141.36	3590.5	36.18
18/5V1500	18	150	3810	151.36	3844.5	38.7
18/5V1600	18	160	4064	161.36	4098.5	41.22
18/5V1700	18	170	4318	171.36	4352.5	43.92
18/5V1800	18	180	4572	181.36	4606.5	46.44
18/5V1900	18	190	4826	191.36	4860.5	48.96
18/5V2000	18	200	5080	201.36	5114.5	51.66
18/5V2120	18	212	5385	213.36	5419.3	54.72
18/5V2240	18	224	5690	225.36	5724.1	57.78
18/5V2360	18	236	5994	237.36	6028.9	60.84
18/5V1600	18	160	4064	161.36	4098.5	41.22
18/5V1700	18	170	4318	171.36	4352.5	43.92
18/5V1800	18	180	4572	181.36	4606.5	46.44
18/5V1900	18	190	4826	191.36	4860.5	48.96
18/5V2000	18	200	5080	201.36	5114.5	51.66
18/5V2120	18	212	5385	213.36	5419.3	54.72
18/5V2240	18	224	5690	225.36	5724.1	57.78
18/5V2360	18	236	5994	237.36	6028.9	60.84
18/5V2500	18	250	6350	251.36	6384.5	64.44
18/5V2650	18	265	6731	266.36	6765.5	68.4
18/5V2800	18	280	7112	281.36	7146.5	72.18

5V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
18/5V3000	18	300	7620	301.36	7654.5	77.4
18/5V3150	18	315	8001	316.36	8035.5	81.18
18/5V3350	18	335	8509	336.36	8543.5	86.4
18/5V3550	18	355	9017	356.36	9051.5	91.62



BELT PART NUMBER NOMENCLATURE

Belt No: **2/8V1000**
2/ - Number of Ribs
8V - Profile
1000 - Inside Circumference (Inches in tenths: 100.0")

8V

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
2/8V1000	2	100	2540	101.48	2577.6	7.18
2/8V1060	2	106	2692	107.48	2730	7.6
2/8V1120	2	112	2845	113.48	2882.4	8.04
2/8V1180	2	118	2997	119.48	3034.8	8.48
2/8V1250	2	125	3175	126.48	3212.6	8.98
2/8V1320	2	132	3353	133.48	3390.4	9.48
2/8V1400	2	140	3556	141.48	3593.6	10.04
2/8V1500	2	150	3810	151.48	3847.6	10.76
2/8V1600	2	160	4064	161.48	4101.6	11.48
2/8V1700	2	170	4318	171.48	4355.6	12.2
2/8V1800	2	180	4572	181.48	4609.6	12.92
2/8V1900	2	190	4826	191.48	4863.6	13.64
2/8V2000	2	200	5080	201.48	5117.6	14.36
2/8V2120	2	212	5385	213.48	5422.4	15.22
2/8V2240	2	224	5690	225.48	5727.2	16.08
2/8V2360	2	236	5994	237.48	6032	16.94
2/8V2500	2	250	6350	251.48	6387.6	17.94
2/8V2650	2	265	6731	266.48	6768.6	19.02
2/8V2800	2	280	7112	281.48	7149.6	20.1
2/8V3000	2	300	7620	301.48	7657.6	21.54
2/8V3150	2	315	8001	316.48	8038.6	22.62
2/8V3350	2	335	8509	336.48	8546.6	24.04
2/8V3550	2	355	9017	356.48	9054.6	25.48
2/8V3750	2	375	9525	376.48	9562.6	26.92
2/8V4000	2	400	10160	401.48	10197.6	28.72
2/8V4250	2	425	10795	426.48	10832.6	30.5
2/8V4500	2	450	11430	451.48	11467.6	32.3
2/8V4750	2	475	12065	476.48	12102.6	34.1
2/8V5000	2	500	12700	501.48	12737.6	35.9
2/8V5600	2	560	14224	561.48	14261.6	40.2
2/8V6000	2	600	15240	601.48	15277.6	43.06

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



8V						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
3/8V1000	3	100	2540	101.48	2577.6	10.77
3/8V1060	3	106	2692	107.48	2730	11.4
3/8V1120	3	112	2845	113.48	2882.4	12.06
3/8V1180	3	118	2997	119.48	3034.8	12.72
3/8V1250	3	125	3175	126.48	3212.6	13.47
3/8V1320	3	132	3353	133.48	3390.4	14.22
3/8V1400	3	140	3556	141.48	3593.6	15.06
3/8V1500	3	150	3810	151.48	3847.6	16.14
3/8V1600	3	160	4064	161.48	4101.6	17.22
3/8V1700	3	170	4318	171.48	4355.6	18.3
3/8V1800	3	180	4572	181.48	4609.6	19.38
3/8V1900	3	190	4826	191.48	4863.6	20.46
3/8V2000	3	200	5080	201.48	5117.6	21.54
3/8V2120	3	212	5385	213.48	5422.4	22.83
3/8V2240	3	224	5690	225.48	5727.2	24.12
3/8V2360	3	236	5994	237.48	6032	25.41
3/8V2500	3	250	6350	251.48	6387.6	26.91
3/8V2650	3	265	6731	266.48	6768.6	28.53
3/8V2800	3	280	7112	281.48	7149.6	30.15
3/8V3000	3	300	7620	301.48	7657.6	32.31
3/8V3150	3	315	8001	316.48	8038.6	33.93
3/8V3350	3	335	8509	336.48	8546.6	36.06
3/8V3550	3	355	9017	356.48	9054.6	38.22
3/8V3750	3	375	9525	376.48	9562.6	40.38
3/8V4000	3	400	10160	401.48	10197.6	43.08
3/8V4250	3	425	10795	426.48	10832.6	45.75
3/8V4500	3	450	11430	451.48	11467.6	48.45
3/8V4750	3	475	12065	476.48	12102.6	51.15
3/8V5000	3	500	12700	501.48	12737.6	53.85
3/8V5600	3	560	14224	561.48	14261.6	60.3
3/8V6000	3	600	15240	601.48	15277.6	64.59
4/8V1000	4	100	2540	101.48	2577.6	14.36
4/8V1060	4	106	2692	107.48	2730	15.2
4/8V1120	4	112	2845	113.48	2882.4	16.08
4/8V1180	4	118	2997	119.48	3034.8	16.96
4/8V1250	4	125	3175	126.48	3212.6	17.96
4/8V1320	4	132	3353	133.48	3390.4	18.96
4/8V1400	4	140	3556	141.48	3593.6	20.08
4/8V1500	4	150	3810	151.48	3847.6	21.52
4/8V1600	4	160	4064	161.48	4101.6	22.96
4/8V1700	4	170	4318	171.48	4355.6	24.4
4/8V1800	4	180	4572	181.48	4609.6	25.84
4/8V1900	4	190	4826	191.48	4863.6	27.28
4/8V2000	4	200	5080	201.48	5117.6	28.72
4/8V2120	4	212	5385	213.48	5422.4	30.44
4/8V2240	4	224	5690	225.48	5727.2	32.16
4/8V2500	4	250	6350	251.48	6387.6	35.88

8V						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
4/8V2650	4	265	6731	266.48	6768.6	38.04
4/8V2800	4	280	7112	281.48	7149.6	40.2
4/8V3000	4	300	7620	301.48	7657.6	43.08
4/8V3150	4	315	8001	316.48	8038.6	45.24
4/8V3350	4	335	8509	336.48	8546.6	48.08
4/8V3550	4	355	9017	356.48	9054.6	50.96
4/8V3750	4	375	9525	376.48	9562.6	53.84
4/8V4000	4	400	10160	401.48	10197.6	57.44
4/8V4250	4	425	10795	426.48	10832.6	61
4/8V4500	4	450	11430	451.48	11467.6	64.6
4/8V4750	4	475	12065	476.48	12102.6	68.2
4/8V5000	4	500	12700	501.48	12737.6	71.8
4/8V5600	4	560	14224	561.48	14261.6	80.4
4/8V6000	4	600	15240	601.48	15277.6	86.12
5/8V1000	5	100	2540	101.48	2577.6	17.95
5/8V1060	5	106	2692	107.48	2730	19
5/8V1120	5	112	2845	113.48	2882.4	20.1
5/8V1180	5	118	2997	119.48	3034.8	21.2
5/8V1250	5	125	3175	126.48	3212.6	22.45
5/8V1320	5	132	3353	133.48	3390.4	23.7
5/8V1400	5	140	3556	141.48	3593.6	25.1
5/8V1500	5	150	3810	151.48	3847.6	26.9
5/8V1600	5	160	4064	161.48	4101.6	28.7
5/8V1700	5	170	4318	171.48	4355.6	30.5
5/8V1800	5	180	4572	181.48	4609.6	32.3
5/8V1900	5	190	4826	191.48	4863.6	34.1
5/8V2000	5	200	5080	201.48	5117.6	35.9
5/8V2120	5	212	5385	213.48	5422.4	38.05
5/8V2240	5	224	5690	225.48	5727.2	40.2
5/8V2360	5	236	5994	237.48	6032	42.35
5/8V2500	5	250	6350	251.48	6387.6	44.85
5/8V2650	5	265	6731	266.48	6768.6	47.55
5/8V2800	5	280	7112	281.48	7149.6	50.25
5/8V3000	5	300	7620	301.48	7657.6	53.85
5/8V3150	5	315	8001	316.48	8038.6	56.55
5/8V3350	5	335	8509	336.48	8546.6	60.1
5/8V3550	5	355	9017	356.48	9054.6	63.7
5/8V3750	5	375	9525	376.48	9562.6	67.3
5/8V4000	5	400	10160	401.48	10197.6	71.8
5/8V4250	5	425	10795	426.48	10832.6	76.25
5/8V4500	5	450	11430	451.48	11467.6	80.75
5/8V4750	5	475	12065	476.48	12102.6	85.25
5/8V5000	5	500	12700	501.48	12737.6	89.75
5/8V4250	5	425	10795	426.48	10832.6	76.25
5/8V4500	5	450	11430	451.48	11467.6	80.75
5/8V4750	5	475	12065	476.48	12102.6	85.25
5/8V5000	5	500	12700	501.48	12737.6	89.75

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



8V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
5/8V5600	5	560	14224	561.48	14261.6	100.5
5/8V6000	5	600	15240	601.48	15277.6	107.65
6/8V1000	6	100	2540	101.48	2577.6	21.54
6/8V1060	6	106	2692	107.48	2730	22.8
6/8V1120	6	112	2845	113.48	2882.4	24.12
6/8V1180	6	118	2997	119.48	3034.8	25.44
6/8V1250	6	125	3175	126.48	3212.6	26.94
6/8V1320	6	132	3353	133.48	3390.4	28.44
6/8V1400	6	140	3556	141.48	3593.6	30.12
6/8V1500	6	150	3810	151.48	3847.6	32.28
6/8V1600	6	160	4064	161.48	4101.6	34.44
6/8V1700	6	170	4318	171.48	4355.6	36.6
6/8V1800	6	180	4572	181.48	4609.6	38.76
6/8V1900	6	190	4826	191.48	4863.6	40.92
6/8V2000	6	200	5080	201.48	5117.6	43.08
6/8V2120	6	212	5385	213.48	5422.4	45.66
6/8V2240	6	224	5690	225.48	5727.2	48.24
6/8V2360	6	236	5994	237.48	6032	50.82
6/8V2500	6	250	6350	251.48	6387.6	53.82
6/8V2650	6	265	6731	266.48	6768.6	57.06
6/8V2800	6	280	7112	281.48	7149.6	60.3
6/8V3000	6	300	7620	301.48	7657.6	64.62
6/8V3150	6	315	8001	316.48	8038.6	67.86
6/8V3350	6	335	8509	336.48	8546.6	72.12
6/8V3550	6	355	9017	356.48	9054.6	76.44
6/8V3750	6	375	9525	376.48	9562.6	80.76
6/8V4000	6	400	10160	401.48	10197.6	86.16
6/8V4250	6	425	10795	426.48	10832.6	91.5
6/8V4500	6	450	11430	451.48	11467.6	96.9
6/8V4750	6	475	12065	476.48	12102.6	102.3
6/8V5000	6	500	12700	501.48	12737.6	107.7
6/8V5600	6	560	14224	561.48	14261.6	120.6
6/8V6000	6	600	15240	601.48	15277.6	129.18
7/8V1000	7	100	2540	101.48	2577.6	25.13
7/8V1060	7	106	2692	107.48	2730	26.6
7/8V1120	7	112	2845	113.48	2882.4	28.14
7/8V1180	7	118	2997	119.48	3034.8	29.68
7/8V1250	7	125	3175	126.48	3212.6	31.43
7/8V1320	7	132	3353	133.48	3390.4	33.18
7/8V1400	7	140	3556	141.48	3593.6	35.14
7/8V1500	7	150	3810	151.48	3847.6	37.66
7/8V1600	7	160	4064	161.48	4101.6	40.18
7/8V1700	7	170	4318	171.48	4355.6	42.7
7/8V2000	7	200	5080	201.48	5117.6	50.26
7/8V2120	7	212	5385	213.48	5422.4	53.27
7/8V2240	7	224	5690	225.48	5727.2	56.28
7/8V2360	7	236	5994	237.48	6032	59.29

8V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
7/8V2500	7	250	6350	251.48	6387.6	62.79
7/8V2650	7	265	6731	266.48	6768.6	66.57
7/8V2800	7	280	7112	281.48	7149.6	70.35
7/8V3000	7	300	7620	301.48	7657.6	75.39
7/8V3150	7	315	8001	316.48	8038.6	79.17
7/8V3350	7	335	8509	336.48	8546.6	84.14
7/8V3550	7	355	9017	356.48	9054.6	89.18
7/8V3750	7	375	9525	376.48	9562.6	94.22
7/8V4000	7	400	10160	401.48	10197.6	100.52
7/8V4250	7	425	10795	426.48	10832.6	106.75
7/8V4500	7	450	11430	451.48	11467.6	113.05
7/8V4750	7	475	12065	476.48	12102.6	119.35
7/8V5000	7	500	12700	501.48	12737.6	125.65
7/8V5600	7	560	14224	561.48	14261.6	140.7
7/8V6000	7	600	15240	601.48	15277.6	150.71
8/8V1000	8	100	2540	101.48	2577.6	28.72
8/8V1060	8	106	2692	107.48	2730	30.4
8/8V1120	8	112	2845	113.48	2882.4	32.16
8/8V1180	8	118	2997	119.48	3034.8	33.92
8/8V1250	8	125	3175	126.48	3212.6	35.92
8/8V1320	8	132	3353	133.48	3390.4	37.92
8/8V1400	8	140	3556	141.48	3593.6	40.16
8/8V1500	8	150	3810	151.48	3847.6	43.04
8/8V1600	8	160	4064	161.48	4101.6	45.92
8/8V1700	8	170	4318	171.48	4355.6	48.8
8/8V1800	8	180	4572	181.48	4609.6	51.68
8/8V1900	8	190	4826	191.48	4863.6	54.56
8/8V2000	8	200	5080	201.48	5117.6	57.44
8/8V2120	8	212	5385	213.48	5422.4	60.88
8/8V2240	8	224	5690	225.48	5727.2	64.32
8/8V2360	8	236	5994	237.48	6032	67.76
8/8V2500	8	250	6350	251.48	6387.6	71.76
8/8V2650	8	265	6731	266.48	6768.6	76.08
8/8V2800	8	280	7112	281.48	7149.6	80.4
8/8V3000	8	300	7620	301.48	7657.6	86.16
8/8V3150	8	315	8001	316.48	8038.6	90.48
8/8V3350	8	335	8509	336.48	8546.6	96.16
8/8V3550	8	355	9017	356.48	9054.6	101.92
8/8V3750	8	375	9525	376.48	9562.6	107.68
8/8V4000	8	400	10160	401.48	10197.6	114.88
8/8V4250	8	425	10795	426.48	10832.6	122
8/8V4500	8	450	11430	451.48	11467.6	129.2
8/8V4750	8	475	12065	476.48	12102.6	136.4
8/8V5000	8	500	12700	501.48	12737.6	143.6
8/8V5600	8	560	14224	561.48	14261.6	160.8
8/8V6000	8	600	15240	601.48	15277.6	172.24
9/8V1000	9	100	2540	101.48	2577.6	32.31

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT



8V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
9/8V1060	9	106	2692	107.48	2730	34.2
9/8V1120	9	112	2845	113.48	2882.4	36.18
9/8V1180	9	118	2997	119.48	3034.8	38.16
9/8V1250	9	125	3175	126.48	3212.6	40.41
9/8V1320	9	132	3353	133.48	3390.4	42.66
9/8V1400	9	140	3556	141.48	3593.6	45.18
9/8V1500	9	150	3810	151.48	3847.6	48.42
9/8V1600	9	160	4064	161.48	4101.6	51.66
9/8V1700	9	170	4318	171.48	4355.6	54.9
9/8V1800	9	180	4572	181.48	4609.6	58.14
9/8V1900	9	190	4826	191.48	4863.6	61.38
9/8V2000	9	200	5080	201.48	5117.6	64.62
9/8V2120	9	212	5385	213.48	5422.4	68.49
9/8V2240	9	224	5690	225.48	5727.2	72.36
9/8V2360	9	236	5994	237.48	6032	76.23
9/8V2500	9	250	6350	251.48	6387.6	80.73
9/8V2650	9	265	6731	266.48	6768.6	85.59
9/8V2800	9	280	7112	281.48	7149.6	90.45
9/8V3000	9	300	7620	301.48	7657.6	96.93
9/8V3150	9	315	8001	316.48	8038.6	101.79
9/8V3350	9	335	8509	336.48	8546.6	108.18
9/8V3550	9	355	9017	356.48	9054.6	114.66
9/8V3750	9	375	9525	376.48	9562.6	121.14
9/8V4000	9	400	10160	401.48	10197.6	129.24
9/8V4250	9	425	10795	426.48	10832.6	137.25
9/8V4500	9	450	11430	451.48	11467.6	145.35
9/8V4750	9	475	12065	476.48	12102.6	153.45
9/8V5000	9	500	12700	501.48	12737.6	161.55
9/8V5600	9	560	14224	561.48	14261.6	180.9
9/8V6000	9	600	15240	601.48	15277.6	193.77
10/8V1000	10	100	2540	101.48	2577.6	35.9
10/8V1060	10	106	2692	107.48	2730	38
10/8V1120	10	112	2845	113.48	2882.4	40.2
10/8V1180	10	118	2997	119.48	3034.8	42.4
10/8V1250	10	125	3175	126.48	3212.6	44.9
10/8V1320	10	132	3353	133.48	3390.4	47.4
10/8V1400	10	140	3556	141.48	3593.6	50.2
10/8V1500	10	150	3810	151.48	3847.6	53.8
10/8V1600	10	160	4064	161.48	4101.6	57.4
10/8V1700	10	170	4318	171.48	4355.6	61
10/8V1800	10	180	4572	181.48	4609.6	64.6
10/8V1900	10	190	4826	191.48	4863.6	68.2
10/8V2000	10	200	5080	201.48	5117.6	71.8
10/8V2120	10	212	5385	213.48	5422.4	76.1
10/8V2240	10	224	5690	225.48	5727.2	80.4
10/8V2360	10	236	5994	237.48	6032	84.7
10/8V2500	10	250	6350	251.48	6387.6	89.7

8V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
10/8V2650	10	265	6731	266.48	6768.6	95.1
10/8V2800	10	280	7112	281.48	7149.6	100.5
10/8V3000	10	300	7620	301.48	7657.6	107.7
10/8V3150	10	315	8001	316.48	8038.6	113.1
10/8V3350	10	335	8509	336.48	8546.6	120.2
10/8V3550	10	355	9017	356.48	9054.6	127.4
10/8V3750	10	375	9525	376.48	9562.6	134.6
10/8V4000	10	400	10160	401.48	10197.6	143.6
10/8V4250	10	425	10795	426.48	10832.6	152.5
10/8V4500	10	450	11430	451.48	11467.6	161.5
10/8V4750	10	475	12065	476.48	12102.6	170.5
10/8V5000	10	500	12700	501.48	12737.6	179.5
10/8V5600	10	560	14224	561.48	14261.6	201
10/8V6000	10	600	15240	601.48	15277.6	215.3
11/8V1000	11	100	2540	101.48	2577.6	39.49
11/8V1060	11	106	2692	107.48	2730	41.8
11/8V1120	11	112	2845	113.48	2882.4	44.22
11/8V1180	11	118	2997	119.48	3034.8	46.64
11/8V1250	11	125	3175	126.48	3212.6	49.39
11/8V1320	11	132	3353	133.48	3390.4	52.14
11/8V1400	11	140	3556	141.48	3593.6	55.22
11/8V1500	11	150	3810	151.48	3847.6	59.18
11/8V1600	11	160	4064	161.48	4101.6	63.14
11/8V1700	11	170	4318	171.48	4355.6	67.1
11/8V1800	11	180	4572	181.48	4609.6	71.06
11/8V1900	11	190	4826	191.48	4863.6	75.02
11/8V2000	11	200	5080	201.48	5117.6	78.98
11/8V2120	11	212	5385	213.48	5422.4	83.71
11/8V2240	11	224	5690	225.48	5727.2	88.44
11/8V2360	11	236	5994	237.48	6032	93.17
11/8V2500	11	250	6350	251.48	6387.6	98.67
11/8V2650	11	265	6731	266.48	6768.6	104.61
11/8V2800	11	280	7112	281.48	7149.6	110.55
11/8V3000	11	300	7620	301.48	7657.6	118.47
11/8V3150	11	315	8001	316.48	8038.6	124.41
11/8V3350	11	335	8509	336.48	8546.6	132.22
11/8V3550	11	355	9017	356.48	9054.6	140.14
11/8V3750	11	375	9525	376.48	9562.6	148.06
11/8V4000	11	400	10160	401.48	10197.6	157.96
11/8V4250	11	425	10795	426.48	10832.6	167.75
11/8V4500	11	450	11430	451.48	11467.6	177.65
11/8V4750	11	475	12065	476.48	12102.6	187.55
11/8V5000	11	500	12700	501.48	12737.6	197.45
11/8V5600	11	560	14224	561.48	14261.6	221.1
11/8V6000	11	600	15240	601.48	15277.6	236.83
12/8V1000	12	100	2540	101.48	2577.6	43.08
12/8V1060	12	106	2692	107.48	2730	45.6

BANDED NARROW WRAPPED 3V, 5V, 8V V-BELT

8V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
12/8V1120	12	112	2845	113.48	2882.4	48.24
12/8V1180	12	118	2997	119.48	3034.8	50.88
12/8V1250	12	125	3175	126.48	3212.6	53.88
12/8V1320	12	132	3353	133.48	3390.4	56.88
12/8V1400	12	140	3556	141.48	3593.6	60.24
12/8V1500	12	150	3810	151.48	3847.6	64.56
12/8V1600	12	160	4064	161.48	4101.6	68.88
12/8V1700	12	170	4318	171.48	4355.6	73.2
12/8V1800	12	180	4572	181.48	4609.6	77.52
12/8V1900	12	190	4826	191.48	4863.6	81.84
12/8V2000	12	200	5080	201.48	5117.6	86.16
12/8V2120	12	212	5385	213.48	5422.4	91.32
12/8V2240	12	224	5690	225.48	5727.2	96.48
12/8V2360	12	236	5994	237.48	6032	101.64
12/8V2500	12	250	6350	251.48	6387.6	107.64
12/8V2650	12	265	6731	266.48	6768.6	114.12
12/8V2800	12	280	7112	281.48	7149.6	120.6
12/8V3000	12	300	7620	301.48	7657.6	129.24
12/8V3150	12	315	8001	316.48	8038.6	135.72
12/8V3350	12	335	8509	336.48	8546.6	144.24
12/8V3750	12	375	9525	376.48	9562.6	161.52
12/8V4000	12	400	10160	401.48	10197.6	172.32
12/8V4250	12	425	10795	426.48	10832.6	183
12/8V4500	12	450	11430	451.48	11467.6	193.8
12/8V4750	12	475	12065	476.48	12102.6	204.6
12/8V5000	12	500	12700	501.48	12737.6	215.4

8V continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
12/8V5600	12	560	14224	561.48	14261.6	241.2
12/8V6000	12	600	15240	601.48	15277.6	258.36

*Additional Length May Be Available.
Contact us for more information.




BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT



Goodyear Belts has developed Narrow Wrapped Banded V-belts that offer premium performance, providing a long service life. Profile provides more contact allowing a more compact drive design. Aramid cord provides ability to carry higher torque loads for the most demanding drives. Restore your belt drive system's efficiency by installing a new Goodyear Belt.

BELT CONSTRUCTION 3VK / 5VK / 8VK

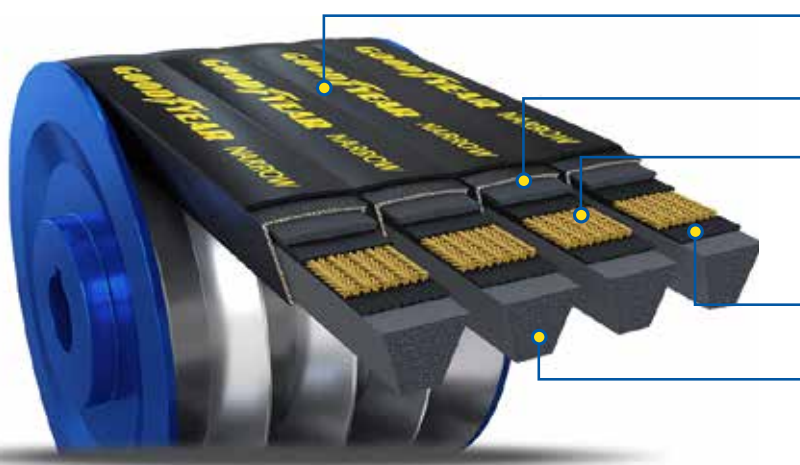

- Durable tie-band construction to prevent belt whip and turnover
- Static conductive and oil/abrasion resistant cover
- High strength aramid cords designed for extreme shock loading and tensile strength with minimal tension decay and low maintenance
- Adhesive rubber layer for belt integrity
- Synthetic rubber compounds for long life and broad operating conditions

FEATURES & BENEFITS


- Efficient Power Transmission:** The cogged design and raw edge construction contribute to efficient power transmission, minimizing energy loss and improving overall system performance.
- Suitable for Heavy-Duty Applications:** The banded construction and high load-carrying capacity make these belts suitable for heavy-duty industrial applications with demanding power transmission needs.
- Meets ARPM/RMA IP-3-2 oil and heat resistant standards.
- Meets ARPM/RMA IP-3-3 static conductivity requirements.
- TEMPERATURE RANGE:**
-51°C/-70°F to +121°C/+250°F.

BELT PART NUMBER NOMENCLATURE

Belt No: **3/3VK500**
3/ - Number of Ribs
3V - Profile
K - Aramid Cord
500 - Outside Circumference (Inches in tenths: 50.0")


PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
WRAPPED V-BELTS				
3VK	45.0	140.0	1143.0	3556.0
5VK	60.0	355.0	1524.0	9017.0
8VK	100.0	600.0	2540.0	15240.0

*Additional Length May Be Available.
Contact us for more information.

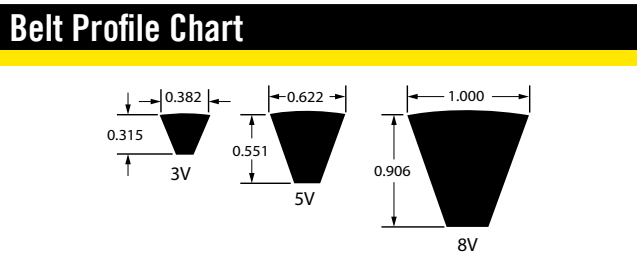

Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
Copyright 2023 The Goodyear Tire & Rubber Company

BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT



BELT PART NUMBER NOMENCLATURE

Belt No: **3/3VK450**
3/ - Number of Ribs
3V - Profile
K - Aramid Cord
450 - Inside Circumference (Inches in tenths 45.0")

3VK

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/3VK450	2	45	1143	46.11	1171.2	0.52
2/3VK475	2	47.5	1207	48.61	1234.7	0.56
2/3VK500	2	50	1270	51.11	1298.2	0.58
2/3VK530	2	53	1346	54.11	1374.4	0.62
2/3VK560	2	56	1422	57.11	1450.6	0.66
2/3VK600	2	60	1524	61.11	1552.2	0.7
2/3VK630	2	63	1600	64.11	1628.4	0.74
2/3VK670	2	67	1702	68.11	1730	0.78
2/3VK710	2	71	1803	72.11	1831.6	0.84
2/3VK750	2	75	1905	76.11	1933.2	0.88
2/3VK800	2	80	2032	81.11	2060.2	0.94
2/3VK850	2	85	2159	86.11	2187.2	1
2/3VK900	2	90	2286	91.11	2314.2	1.06
2/3VK950	2	95	2413	96.11	2441.2	1.12
2/3VK1000	2	100	2540	101.11	2568.2	1.18
2/3VK1060	2	106	2692	107.11	2720.6	1.24
2/3VK1120	2	112	2845	113.11	2873	1.32
2/3VK1180	2	118	2997	119.11	3025.4	1.38
2/3VK1250	2	125	3175	126.11	3203.2	1.48
2/3VK1320	2	132	3353	133.11	3381	1.56
2/3VK1400	2	140	3556	141.11	3584.2	1.64
3/3VK450	3	45	1143	46.11	1171.2	0.78
3/3VK475	3	47.5	1207	48.61	1234.7	0.84
3/3VK500	3	50	1270	51.11	1298.2	0.87
3/3VK530	3	53	1346	54.11	1374.4	0.93
3/3VK560	3	56	1422	57.11	1450.6	0.99
3/3VK600	3	60	1524	61.11	1552.2	1.05
3/3VK630	3	63	1600	64.11	1628.4	1.11
3/3VK670	3	67	1702	68.11	1730	1.17
3/3VK710	3	71	1803	72.11	1831.6	1.26
3/3VK750	3	75	1905	76.11	1933.2	1.32
3/3VK800	3	80	2032	81.11	2060.2	1.41
3/3VK850	3	85	2159	86.11	2187.2	1.5
3/3VK900	3	90	2286	91.11	2314.2	1.59
3/3VK950	3	95	2413	96.11	2441.2	1.68
3/3VK1000	3	100	2540	101.11	2568.2	1.77
3/3VK1060	3	106	2692	107.11	2720.6	1.86
3/3VK1120	3	112	2845	113.11	2873	1.98
3/3VK1180	3	118	2997	119.11	3025.4	2.07

3VK

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3/3VK1250	3	125	3175	126.11	3203.2	2.22
3/3VK1320	3	132	3353	133.11	3381	2.34
3/3VK1400	3	140	3556	141.11	3584.2	2.46
4/3VK450	4	45	1143	46.11	1171.2	1.04
4/3VK475	4	47.5	1207	48.61	1234.7	1.12
4/3VK500	4	50	1270	51.11	1298.2	1.16
4/3VK530	4	53	1346	54.11	1374.4	1.24
4/3VK560	4	56	1422	57.11	1450.6	1.32
4/3VK600	4	60	1524	61.11	1552.2	1.4
4/3VK630	4	63	1600	64.11	1628.4	1.48
4/3VK670	4	67	1702	68.11	1730	1.56
4/3VK710	4	71	1803	72.11	1831.6	1.68
4/3VK750	4	75	1905	76.11	1933.2	1.76
4/3VK800	4	80	2032	81.11	2060.2	1.88
4/3VK850	4	85	2159	86.11	2187.2	2
4/3VK900	4	90	2286	91.11	2314.2	2.12
4/3VK950	4	95	2413	96.11	2441.2	2.24
4/3VK1000	4	100	2540	101.11	2568.2	2.36
4/3VK1060	4	106	2692	107.11	2720.6	2.48
4/3VK1120	4	112	2845	113.11	2873	2.64
4/3VK1180	4	118	2997	119.11	3025.4	2.76
4/3VK1250	4	125	3175	126.11	3203.2	2.96
4/3VK1320	4	132	3353	133.11	3381	3.12
4/3VK1400	4	140	3556	141.11	3584.2	3.28
5/3VK450	5	45	1143	46.11	1171.2	1.3
5/3VK475	5	47.5	1207	48.61	1234.7	1.4
5/3VK500	5	50	1270	51.11	1298.2	1.45
5/3VK530	5	53	1346	54.11	1374.4	1.55
5/3VK560	5	56	1422	57.11	1450.6	1.65
5/3VK600	5	60	1524	61.11	1552.2	1.75
5/3VK630	5	63	1600	64.11	1628.4	1.85
5/3VK670	5	67	1702	68.11	1730	1.95
5/3VK710	5	71	1803	72.11	1831.6	2.1
5/3VK750	5	75	1905	76.11	1933.2	2.2
5/3VK800	5	80	2032	81.11	2060.2	2.35
5/3VK850	5	85	2159	86.11	2187.2	2.5
5/3VK900	5	90	2286	91.11	2314.2	2.65
5/3VK950	5	95	2413	96.11	2441.2	2.8
5/3VK1000	5	100	2540	101.11	2568.2	2.95
5/3VK1060	5	106	2692	107.11	2720.6	3.1
5/3VK1120	5	112	2845	113.11	2873	3.3
5/3VK1180	5	118	2997	119.11	3025.4	3.45
5/3VK1250	5	125	3175	126.11	3203.2	3.7
5/3VK1320	5	132	3353	133.11	3381	3.9
6/3VK500	6	50	1270	51.11	1298.2	1.74
6/3VK530	6	53	1346	54.11	1374.4	1.86
6/3VK560	6	56	1422	57.11	1450.6	1.98

BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT



3VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
6/3VK600	6	60	1524	61.11	1552.2	2.1
6/3VK630	6	63	1600	64.11	1628.4	2.22
6/3VK670	6	67	1702	68.11	1730	2.34
6/3VK710	6	71	1803	72.11	1831.6	2.52
6/3VK750	6	75	1905	76.11	1933.2	2.64
6/3VK800	6	80	2032	81.11	2060.2	2.82
6/3VK850	6	85	2159	86.11	2187.2	3
6/3VK900	6	90	2286	91.11	2314.2	3.18
6/3VK950	6	95	2413	96.11	2441.2	3.36
6/3VK1000	6	100	2540	101.11	2568.2	3.54
6/3VK1060	6	106	2692	107.11	2720.6	3.72
6/3VK1120	6	112	2845	113.11	2873	3.96
6/3VK1180	6	118	2997	119.11	3025.4	4.14
6/3VK1250	6	125	3175	126.11	3203.2	4.44
6/3VK1320	6	132	3353	133.11	3381	4.68
6/3VK1400	6	140	3556	141.11	3584.2	4.92
7/3VK450	7	45	1143	46.11	1171.2	1.82
7/3VK475	7	47.5	1207	48.61	1234.7	1.96
7/3VK500	7	50	1270	51.11	1298.2	2.03
7/3VK530	7	53	1346	54.11	1374.4	2.17
7/3VK560	7	56	1422	57.11	1450.6	2.31
7/3VK600	7	60	1524	61.11	1552.2	2.45
7/3VK630	7	63	1600	64.11	1628.4	2.59
7/3VK670	7	67	1702	68.11	1730	2.73
7/3VK710	7	71	1803	72.11	1831.6	2.94
7/3VK750	7	75	1905	76.11	1933.2	3.08
7/3VK800	7	80	2032	81.11	2060.2	3.29
7/3VK850	7	85	2159	86.11	2187.2	3.5
7/3VK530	7	53	1346	54.11	1374.4	2.17
7/3VK560	7	56	1422	57.11	1450.6	2.31
7/3VK600	7	60	1524	61.11	1552.2	2.45
7/3VK630	7	63	1600	64.11	1628.4	2.59
7/3VK670	7	67	1702	68.11	1730	2.73
7/3VK710	7	71	1803	72.11	1831.6	2.94
7/3VK750	7	75	1905	76.11	1933.2	3.08
7/3VK800	7	80	2032	81.11	2060.2	3.29
7/3VK850	7	85	2159	86.11	2187.2	3.5
7/3VK900	7	90	2286	91.11	2314.2	3.71
7/3VK950	7	95	2413	96.11	2441.2	3.92
7/3VK1000	7	100	2540	101.11	2568.2	4.13
7/3VK1060	7	106	2692	107.11	2720.6	4.34
7/3VK1120	7	112	2845	113.11	2873	4.62
7/3VK1180	7	118	2997	119.11	3025.4	4.83
7/3VK1250	7	125	3175	126.11	3203.2	5.18
7/3VK1320	7	132	3353	133.11	3381	5.46
7/3VK1400	7	140	3556	141.11	3584.2	5.74
8/3VK450	8	45	1143	46.11	1171.2	2.08

3VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
8/3VK475	8	47.5	1207	48.61	1234.7	2.24
8/3VK500	8	50	1270	51.11	1298.2	2.32
8/3VK530	8	53	1346	54.11	1374.4	2.48
8/3VK560	8	56	1422	57.11	1450.6	2.64
8/3VK600	8	60	1524	61.11	1552.2	2.8
8/3VK630	8	63	1600	64.11	1628.4	2.96
8/3VK670	8	67	1702	68.11	1730	3.12
8/3VK710	8	71	1803	72.11	1831.6	3.36
8/3VK750	8	75	1905	76.11	1933.2	3.52
8/3VK800	8	80	2032	81.11	2060.2	3.76
8/3VK850	8	85	2159	86.11	2187.2	4
8/3VK900	8	90	2286	91.11	2314.2	4.24
8/3VK950	8	95	2413	96.11	2441.2	4.48
8/3VK1000	8	100	2540	101.11	2568.2	4.72
8/3VK1060	8	106	2692	107.11	2720.6	4.96
8/3VK1120	8	112	2845	113.11	2873	5.28
8/3VK1180	8	118	2997	119.11	3025.4	5.52
8/3VK1250	8	125	3175	126.11	3203.2	5.92
8/3VK1320	8	132	3353	133.11	3381	6.24
8/3VK1400	8	140	3556	141.11	3584.2	6.56
9/3VK450	9	45	1143	46.11	1171.2	2.34
9/3VK475	9	47.5	1207	48.61	1234.7	2.52
9/3VK500	9	50	1270	51.11	1298.2	2.61
9/3VK530	9	53	1346	54.11	1374.4	2.79
9/3VK560	9	56	1422	57.11	1450.6	2.97
9/3VK600	9	60	1524	61.11	1552.2	3.15
9/3VK630	9	63	1600	64.11	1628.4	3.33
9/3VK670	9	67	1702	68.11	1730	3.51
9/3VK710	9	71	1803	72.11	1831.6	3.78
9/3VK750	9	75	1905	76.11	1933.2	3.96
9/3VK800	9	80	2032	81.11	2060.2	4.23
9/3VK850	9	85	2159	86.11	2187.2	4.5
9/3VK900	9	90	2286	91.11	2314.2	4.77
9/3VK950	9	95	2413	96.11	2441.2	5.04
9/3VK1000	9	100	2540	101.11	2568.2	5.31
9/3VK1060	9	106	2692	107.11	2720.6	5.58
9/3VK1120	9	112	2845	113.11	2873	5.94
9/3VK1180	9	118	2997	119.11	3025.4	6.21
9/3VK1250	9	125	3175	126.11	3203.2	6.66
9/3VK1320	9	132	3353	133.11	3381	7.02
9/3VK1400	9	140	3556	141.11	3584.2	7.38
10/3VK450	10	45	1143	46.11	1171.2	2.6
10/3VK475	10	47.5	1207	48.61	1234.7	2.8
10/3VK500	10	50	1270	51.11	1298.2	2.9
10/3VK530	10	53	1346	54.11	1374.4	3.1
10/3VK560	10	56	1422	57.11	1450.6	3.3
10/3VK600	10	60	1524	61.11	1552.2	3.5


BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT

3VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
10/3VK630	10	63	1600	64.11	1628.4	3.7
10/3VK670	10	67	1702	68.11	1730	3.9
10/3VK710	10	71	1803	72.11	1831.6	4.2
10/3VK750	10	75	1905	76.11	1933.2	4.4
10/3VK800	10	80	2032	81.11	2060.2	4.7
10/3VK850	10	85	2159	86.11	2187.2	5
10/3VK900	10	90	2286	91.11	2314.2	5.3
10/3VK950	10	95	2413	96.11	2441.2	5.6
10/3VK1000	10	100	2540	101.11	2568.2	5.9
10/3VK1060	10	106	2692	107.11	2720.6	6.2
10/3VK1120	10	112	2845	113.11	2873	6.6
10/3VK1180	10	118	2997	119.11	3025.4	6.9
10/3VK1250	10	125	3175	126.11	3203.2	7.4
10/3VK1320	10	132	3353	133.11	3381	7.8
10/3VK1400	10	140	3556	141.11	3584.2	8.2

BELT PART NUMBER NOMENCLATURE

Belt No: **3/VK900**
3/ - Number of Ribs
5V - Profil5e
K - Aramid Cord
900 - Inside Circumference (Inches in tenths: 90.0")



5VK

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/5VK600	2	60	1524	61.36	1558.5	1.72
2/5VK630	2	63	1600	64.36	1634.7	1.82
2/5VK670	2	67	1702	68.36	1736.3	1.92
2/5VK710	2	71	1803	72.36	1837.9	2.04
2/5VK730	2	73	1854	74.36	1888.7	2.1
2/5VK750	2	75	1905	76.36	1939.5	2.16
2/5VK800	2	80	2032	81.36	2066.5	2.3
2/5VK850	2	85	2159	86.36	2193.5	2.44
2/5VK870	2	87	2210	88.36	2244.3	2.5
2/5VK900	2	90	2286	91.36	2320.5	2.6
2/5VK950	2	95	2413	96.36	2447.5	2.74
2/5VK1000	2	100	2540	101.36	2574.5	2.88
2/5VK1060	2	106	2692	107.36	2726.9	3.06
2/5VK1120	2	112	2845	113.36	2879.3	3.22
2/5VK1180	2	118	2997	119.36	3031.7	3.4
2/5VK1250	2	125	3175	126.36	3209.5	3.6
2/5VK1320	2	132	3353	133.36	3387.3	3.8
2/5VK1400	2	140	3556	141.36	3590.5	4.04
2/5VK1500	2	150	3810	151.36	3844.5	4.32
2/5VK1600	2	160	4064	161.36	4098.5	4.6

5VK

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/5VK1700	2	170	4318	171.36	4352.5	4.9
2/5VK1800	2	180	4572	181.36	4606.5	5.18
2/5VK1900	2	190	4826	191.36	4860.5	5.48
2/5VK2000	2	200	5080	201.36	5114.5	5.76
2/5VK2030	2	203	5156	204.36	5190.7	5.84
2/5VK2120	2	212	5385	213.36	5419.3	6.1
2/5VK2240	2	224	5690	225.36	5724.1	6.44
2/5VK2360	2	236	5994	237.36	6028.9	6.8
2/5VK2500	2	250	6350	251.36	6384.5	7.2
2/5VK2650	2	265	6731	266.36	6765.5	7.62
2/5VK2800	2	280	7112	281.36	7146.5	8.06
2/5VK3000	2	300	7620	301.36	7654.5	8.64
2/5VK3150	2	315	8001	316.36	8035.5	9.06
2/5VK3350	2	335	8509	336.36	8543.5	9.64
2/5VK3550	2	355	9017	356.36	9051.5	10.22
3/5VK600	3	60	1524	61.36	1558.5	2.58
3/5VK630	3	63	1600	64.36	1634.7	2.73
3/5VK670	3	67	1702	68.36	1736.3	2.88
3/5VK710	3	71	1803	72.36	1837.9	3.06
3/5VK730	3	73	1854	74.36	1888.7	3.15
3/5VK750	3	75	1905	76.36	1939.5	3.24
3/5VK800	3	80	2032	81.36	2066.5	3.45
3/5VK850	3	85	2159	86.36	2193.5	3.66
3/5VK870	3	87	2210	88.36	2244.3	3.75
3/5VK900	3	90	2286	91.36	2320.5	3.9
3/5VK950	3	95	2413	96.36	2447.5	4.11
3/5VK1000	3	100	2540	101.36	2574.5	4.32
3/5VK1060	3	106	2692	107.36	2726.9	4.59
3/5VK1120	3	112	2845	113.36	2879.3	4.83
3/5VK1180	3	118	2997	119.36	3031.7	5.1
3/5VK1250	3	125	3175	126.36	3209.5	5.4
3/5VK1320	3	132	3353	133.36	3387.3	5.7
3/5VK1400	3	140	3556	141.36	3590.5	6.06
3/5VK1500	3	150	3810	151.36	3844.5	6.48
3/5VK1600	3	160	4064	161.36	4098.5	6.9
3/5VK1700	3	170	4318	171.36	4352.5	7.35
3/5VK1800	3	180	4572	181.36	4606.5	7.77
3/5VK1900	3	190	4826	191.36	4860.5	8.22
3/5VK2000	3	200	5080	201.36	5114.5	8.64
3/5VK2030	3	203	5156	204.36	5190.7	8.76
3/5VK2120	3	212	5385	213.36	5419.3	9.15
3/5VK2240	3	224	5690	225.36	5724.1	9.66
3/5VK2360	3	236	5994	237.36	6028.9	10.2
3/5VK2500	3	250	6350	251.36	6384.5	10.8
3/5VK2650	3	265	6731	266.36	6765.5	11.43

BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT



5VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
3/5VK2800	3	280	7112	281.36	7146.5	12.09
3/5VK3000	3	300	7620	301.36	7654.5	12.96
3/5VK3150	3	315	8001	316.36	8035.5	13.59
3/5VK3350	3	335	8509	336.36	8543.5	14.46
3/5VK3550	3	355	9017	356.36	9051.5	15.33
4/5VK600	4	60	1524	61.36	1558.5	3.44
4/5VK630	4	63	1600	64.36	1634.7	3.64
4/5VK670	4	67	1702	68.36	1736.3	3.84
4/5VK710	4	71	1803	72.36	1837.9	4.08
4/5VK730	4	73	1854	74.36	1888.7	4.2
4/5VK750	4	75	1905	76.36	1939.5	4.32
4/5VK800	4	80	2032	81.36	2066.5	4.6
4/5VK850	4	85	2159	86.36	2193.5	4.88
4/5VK870	4	87	2210	88.36	2244.3	5
4/5VK900	4	90	2286	91.36	2320.5	5.2
4/5VK950	4	95	2413	96.36	2447.5	5.48
4/5VK1000	4	100	2540	101.36	2574.5	5.76
4/5VK1060	4	106	2692	107.36	2726.9	6.12
4/5VK1120	4	112	2845	113.36	2879.3	6.44
4/5VK1180	4	118	2997	119.36	3031.7	6.8
4/5VK1250	4	125	3175	126.36	3209.5	7.2
4/5VK1320	4	132	3353	133.36	3387.3	7.6
4/5VK1400	4	140	3556	141.36	3590.5	8.08
4/5VK1500	4	150	3810	151.36	3844.5	8.64
4/5VK1600	4	160	4064	161.36	4098.5	9.2
4/5VK1700	4	170	4318	171.36	4352.5	9.8
4/5VK1800	4	180	4572	181.36	4606.5	10.36
4/5VK1900	4	190	4826	191.36	4860.5	10.96
4/5VK2000	4	200	5080	201.36	5114.5	11.52
4/5VK2030	4	203	5156	204.36	5190.7	11.68
4/5VK2120	4	212	5385	213.36	5419.3	12.2
4/5VK2240	4	224	5690	225.36	5724.1	12.88
4/5VK2360	4	236	5994	237.36	6028.9	13.6
4/5VK2500	4	250	6350	251.36	6384.5	14.4
4/5VK2650	4	265	6731	266.36	6765.5	15.24
4/5VK2800	4	280	7112	281.36	7146.5	16.12
4/5VK3000	4	300	7620	301.36	7654.5	17.28
4/5VK3150	4	315	8001	316.36	8035.5	18.12
4/5VK3350	4	335	8509	336.36	8543.5	19.28
4/5VK3550	4	355	9017	356.36	9051.5	20.44
5/5VK600	5	60	1524	61.36	1558.5	4.3
5/5VK630	5	63	1600	64.36	1634.7	4.55
5/5VK670	5	67	1702	68.36	1736.3	4.8
5/5VK710	5	71	1803	72.36	1837.9	5.1
5/5VK730	5	73	1854	74.36	1888.7	5.25
5/5VK750	5	75	1905	76.36	1939.5	5.4
5/5VK800	5	80	2032	81.36	2066.5	5.75

5VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
5/5VK850	5	85	2159	86.36	2193.5	6.1
5/5VK870	5	87	2210	88.36	2244.3	6.25
5/5VK900	5	90	2286	91.36	2320.5	6.5
5/5VK950	5	95	2413	96.36	2447.5	6.85
5/5VK1000	5	100	2540	101.36	2574.5	7.2
5/5VK1060	5	106	2692	107.36	2726.9	7.65
5/5VK1120	5	112	2845	113.36	2879.3	8.05
5/5VK1180	5	118	2997	119.36	3031.7	8.5
5/5VK1250	5	125	3175	126.36	3209.5	9
5/5VK1320	5	132	3353	133.36	3387.3	9.5
5/5VK1400	5	140	3556	141.36	3590.5	10.1
5/5VK1500	5	150	3810	151.36	3844.5	10.8
5/5VK1600	5	160	4064	161.36	4098.5	11.5
5/5VK1700	5	170	4318	171.36	4352.5	12.25
5/5VK1800	5	180	4572	181.36	4606.5	12.95
5/5VK1900	5	190	4826	191.36	4860.5	13.7
5/5VK2000	5	200	5080	201.36	5114.5	14.4
5/5VK2030	5	203	5156	204.36	5190.7	14.6
5/5VK2120	5	212	5385	213.36	5419.3	15.25
5/5VK2240	5	224	5690	225.36	5724.1	16.1
5/5VK2360	5	236	5994	237.36	6028.9	17
5/5VK2500	5	250	6350	251.36	6384.5	18
5/5VK2650	5	265	6731	266.36	6765.5	19.05
5/5VK2800	5	280	7112	281.36	7146.5	20.15
5/5VK3000	5	300	7620	301.36	7654.5	21.6
5/5VK3150	5	315	8001	316.36	8035.5	22.65
5/5VK3350	5	335	8509	336.36	8543.5	24.1
5/5VK3550	5	355	9017	356.36	9051.5	25.55
6/5VK600	6	60	1524	61.36	1558.5	5.16
6/5VK630	6	63	1600	64.36	1634.7	5.46
6/5VK670	6	67	1702	68.36	1736.3	5.76
6/5VK710	6	71	1803	72.36	1837.9	6.12
6/5VK730	6	73	1854	74.36	1888.7	6.3
6/5VK750	6	75	1905	76.36	1939.5	6.48
6/5VK800	6	80	2032	81.36	2066.5	6.9
6/5VK850	6	85	2159	86.36	2193.5	7.32
6/5VK870	6	87	2210	88.36	2244.3	7.5
6/5VK900	6	90	2286	91.36	2320.5	7.8
6/5VK950	6	95	2413	96.36	2447.5	8.22
6/5VK1000	6	100	2540	101.36	2574.5	8.64
6/5VK1060	6	106	2692	107.36	2726.9	9.18
6/5VK1120	6	112	2845	113.36	2879.3	9.66
6/5VK1180	6	118	2997	119.36	3031.7	10.2
6/5VK1250	6	125	3175	126.36	3209.5	10.8
6/5VK1320	6	132	3353	133.36	3387.3	11.4
6/5VK1400	6	140	3556	141.36	3590.5	12.12
6/5VK1500	6	150	3810	151.36	3844.5	12.96

BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT



5VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
6/5VK1600	6	160	4064	161.36	4098.5	13.8
6/5VK1700	6	170	4318	171.36	4352.5	14.7
6/5VK1800	6	180	4572	181.36	4606.5	15.54
6/5VK1900	6	190	4826	191.36	4860.5	16.44
6/5VK2000	6	200	5080	201.36	5114.5	17.28
6/5VK2030	6	203	5156	204.36	5190.7	17.52
6/5VK2120	6	212	5385	213.36	5419.3	18.3
6/5VK2240	6	224	5690	225.36	5724.1	19.32
6/5VK2360	6	236	5994	237.36	6028.9	20.4
6/5VK2500	6	250	6350	251.36	6384.5	21.6
6/5VK2650	6	265	6731	266.36	6765.5	22.86
6/5VK2800	6	280	7112	281.36	7146.5	24.18
6/5VK3000	6	300	7620	301.36	7654.5	25.92
6/5VK3150	6	315	8001	316.36	8035.5	27.18
6/5VK3350	6	335	8509	336.36	8543.5	28.92
6/5VK3550	6	355	9017	356.36	9051.5	30.66
7/5VK600	7	60	1524	61.36	1558.5	6.02
7/5VK630	7	63	1600	64.36	1634.7	6.37
7/5VK670	7	67	1702	68.36	1736.3	6.72
7/5VK710	7	71	1803	72.36	1837.9	7.14
7/5VK730	7	73	1854	74.36	1888.7	7.35
7/5VK750	7	75	1905	76.36	1939.5	7.56
7/5VK800	7	80	2032	81.36	2066.5	8.05
7/5VK850	7	85	2159	86.36	2193.5	8.54
7/5VK870	7	87	2210	88.36	2244.3	8.75
7/5VK900	7	90	2286	91.36	2320.5	9.1
7/5VK950	7	95	2413	96.36	2447.5	9.59
7/5VK1000	7	100	2540	101.36	2574.5	10.08
7/5VK1060	7	106	2692	107.36	2726.9	10.71
7/5VK1120	7	112	2845	113.36	2879.3	11.27
7/5VK1180	7	118	2997	119.36	3031.7	11.9
7/5VK1250	7	125	3175	126.36	3209.5	12.6
7/5VK1320	7	132	3353	133.36	3387.3	13.3
7/5VK1400	7	140	3556	141.36	3590.5	14.14
7/5VK1500	7	150	3810	151.36	3844.5	15.12
7/5VK1600	7	160	4064	161.36	4098.5	16.1
7/5VK1700	7	170	4318	171.36	4352.5	17.15
7/5VK1800	7	180	4572	181.36	4606.5	18.13
7/5VK1900	7	190	4826	191.36	4860.5	19.18
7/5VK2000	7	200	5080	201.36	5114.5	20.16
7/5VK2030	7	203	5156	204.36	5190.7	20.44
7/5VK2120	7	212	5385	213.36	5419.3	21.35
7/5VK2240	7	224	5690	225.36	5724.1	22.54
7/5VK2360	7	236	5994	237.36	6028.9	23.8
7/5VK2500	7	250	6350	251.36	6384.5	25.2
7/5VK2650	7	265	6731	266.36	6765.5	26.67
7/5VK2800	7	280	7112	281.36	7146.5	28.21

5VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
7/5VK3000	7	300	7620	301.36	7654.5	30.24
7/5VK3150	7	315	8001	316.36	8035.5	31.71
7/5VK3350	7	335	8509	336.36	8543.5	33.74
7/5VK3550	7	355	9017	356.36	9051.5	35.77
8/5VK600	8	60	1524	61.36	1558.5	6.88
8/5VK630	8	63	1600	64.36	1634.7	7.28
8/5VK670	8	67	1702	68.36	1736.3	7.68
8/5VK710	8	71	1803	72.36	1837.9	8.16
8/5VK730	8	73	1854	74.36	1888.7	8.4
8/5VK750	8	75	1905	76.36	1939.5	8.64
8/5VK800	8	80	2032	81.36	2066.5	9.2
8/5VK850	8	85	2159	86.36	2193.5	9.76
8/5VK870	8	87	2210	88.36	2244.3	10
8/5VK900	8	90	2286	91.36	2320.5	10.4
8/5VK950	8	95	2413	96.36	2447.5	10.96
8/5VK1000	8	100	2540	101.36	2574.5	11.52
8/5VK1060	8	106	2692	107.36	2726.9	12.24
8/5VK1120	8	112	2845	113.36	2879.3	12.88
8/5VK1180	8	118	2997	119.36	3031.7	13.6
8/5VK1250	8	125	3175	126.36	3209.5	14.4
8/5VK1320	8	132	3353	133.36	3387.3	15.2
8/5VK1400	8	140	3556	141.36	3590.5	16.16
8/5VK1500	8	150	3810	151.36	3844.5	17.28
8/5VK1600	8	160	4064	161.36	4098.5	18.4
8/5VK1700	8	170	4318	171.36	4352.5	19.6
8/5VK1800	8	180	4572	181.36	4606.5	20.72
8/5VK1900	8	190	4826	191.36	4860.5	21.92
8/5VK2000	8	200	5080	201.36	5114.5	23.04
8/5VK2030	8	203	5156	204.36	5190.7	23.36
8/5VK2120	8	212	5385	213.36	5419.3	24.4
8/5VK2240	8	224	5690	225.36	5724.1	25.76
8/5VK2360	8	236	5994	237.36	6028.9	27.2
8/5VK2500	8	250	6350	251.36	6384.5	28.8
8/5VK2650	8	265	6731	266.36	6765.5	30.48
8/5VK2800	8	280	7112	281.36	7146.5	32.24
8/5VK3000	8	300	7620	301.36	7654.5	34.56
8/5VK3150	8	315	8001	316.36	8035.5	36.24
8/5VK3350	8	335	8509	336.36	8543.5	38.56
8/5VK3550	8	355	9017	356.36	9051.5	40.88
9/5VK600	9	60	1524	61.36	1558.5	7.74
9/5VK630	9	63	1600	64.36	1634.7	8.19
9/5VK670	9	67	1702	68.36	1736.3	8.64
9/5VK710	9	71	1803	72.36	1837.9	9.18
9/5VK730	9	73	1854	74.36	1888.7	9.45
9/5VK750	9	75	1905	76.36	1939.5	9.72
9/5VK800	9	80	2032	81.36	2066.5	10.35
9/5VK850	9	85	2159	86.36	2193.5	10.98

BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT



5VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
9/5VK870	9	87	2210	88.36	2244.3	11.25
9/5VK900	9	90	2286	91.36	2320.5	11.7
9/5VK950	9	95	2413	96.36	2447.5	12.33
9/5VK1000	9	100	2540	101.36	2574.5	12.96
9/5VK1060	9	106	2692	107.36	2726.9	13.77
9/5VK1120	9	112	2845	113.36	2879.3	14.49
9/5VK1180	9	118	2997	119.36	3031.7	15.3
9/5VK1250	9	125	3175	126.36	3209.5	16.2
9/5VK1320	9	132	3353	133.36	3387.3	17.1
9/5VK1400	9	140	3556	141.36	3590.5	18.18
9/5VK1500	9	150	3810	151.36	3844.5	19.44
9/5VK1600	9	160	4064	161.36	4098.5	20.7
9/5VK1700	9	170	4318	171.36	4352.5	22.05
9/5VK1180	9	118	2997	119.36	3031.7	15.3
9/5VK1250	9	125	3175	126.36	3209.5	16.2
9/5VK1320	9	132	3353	133.36	3387.3	17.1
9/5VK1400	9	140	3556	141.36	3590.5	18.18
9/5VK1500	9	150	3810	151.36	3844.5	19.44
9/5VK1600	9	160	4064	161.36	4098.5	20.7
9/5VK1700	9	170	4318	171.36	4352.5	22.05
9/5VK1800	9	180	4572	181.36	4606.5	23.31
9/5VK1900	9	190	4826	191.36	4860.5	24.66
9/5VK2000	9	200	5080	201.36	5114.5	25.92
9/5VK2030	9	203	5156	204.36	5190.7	26.28
9/5VK2120	9	212	5385	213.36	5419.3	27.45
9/5VK2240	9	224	5690	225.36	5724.1	28.98
9/5VK2360	9	236	5994	237.36	6028.9	30.6
9/5VK2500	9	250	6350	251.36	6384.5	32.4
9/5VK2650	9	265	6731	266.36	6765.5	34.29
9/5VK2800	9	280	7112	281.36	7146.5	36.27
9/5VK3000	9	300	7620	301.36	7654.5	38.88
9/5VK3150	9	315	8001	316.36	8035.5	40.77
9/5VK3350	9	335	8509	336.36	8543.5	43.38
9/5VK3550	9	355	9017	356.36	9051.5	45.99
10/5VK600	10	60	1524	61.36	1558.5	8.6
10/5VK630	10	63	1600	64.36	1634.7	9.1
10/5VK670	10	67	1702	68.36	1736.3	9.6
10/5VK710	10	71	1803	72.36	1837.9	10.2
10/5VK730	10	73	1854	74.36	1888.7	10.5
10/5VK750	10	75	1905	76.36	1939.5	10.8
10/5VK800	10	80	2032	81.36	2066.5	11.5
10/5VK850	10	85	2159	86.36	2193.5	12.2
10/5VK870	10	87	2210	88.36	2244.3	12.5
10/5VK900	10	90	2286	91.36	2320.5	13
10/5VK950	10	95	2413	96.36	2447.5	13.7
10/5VK1000	10	100	2540	101.36	2574.5	14.4
10/5VK1060	10	106	2692	107.36	2726.9	15.3

5VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
10/5VK1120	10	112	2845	113.36	2879.3	16.1
10/5VK1180	10	118	2997	119.36	3031.7	17
10/5VK1250	10	125	3175	126.36	3209.5	18
10/5VK1320	10	132	3353	133.36	3387.3	19
10/5VK1400	10	140	3556	141.36	3590.5	20.2
10/5VK1500	10	150	3810	151.36	3844.5	21.6
10/5VK1600	10	160	4064	161.36	4098.5	23
10/5VK1700	10	170	4318	171.36	4352.5	24.5
10/5VK1800	10	180	4572	181.36	4606.5	25.9
10/5VK1900	10	190	4826	191.36	4860.5	27.4
10/5VK2000	10	200	5080	201.36	5114.5	28.8
10/5VK2030	10	203	5156	204.36	5190.7	29.2
10/5VK2120	10	212	5385	213.36	5419.3	30.5
10/5VK2240	10	224	5690	225.36	5724.1	32.2
10/5VK2360	10	236	5994	237.36	6028.9	34
10/5VK2500	10	250	6350	251.36	6384.5	36
10/5VK2650	10	265	6731	266.36	6765.5	38.1
10/5VK2800	10	280	7112	281.36	7146.5	40.3
10/5VK3000	10	300	7620	301.36	7654.5	43.2
10/5VK3150	10	315	8001	316.36	8035.5	45.3
10/5VK3350	10	335	8509	336.36	8543.5	48.2
10/5VK3550	10	355	9017	356.36	9051.5	51.1
11/5VK600	11	60	1524	61.36	1558.5	9.46
11/5VK630	11	63	1600	64.36	1634.7	10.01
11/5VK670	11	67	1702	68.36	1736.3	10.56
11/5VK710	11	71	1803	72.36	1837.9	11.22
11/5VK730	11	73	1854	74.36	1888.7	11.55
11/5VK750	11	75	1905	76.36	1939.5	11.88
11/5VK800	11	80	2032	81.36	2066.5	12.65
11/5VK850	11	85	2159	86.36	2193.5	13.42
11/5VK870	11	87	2210	88.36	2244.3	13.75
11/5VK900	11	90	2286	91.36	2320.5	14.3
11/5VK630	11	63	1600	64.36	1634.7	10.01
11/5VK670	11	67	1702	68.36	1736.3	10.56
11/5VK710	11	71	1803	72.36	1837.9	11.22
11/5VK730	11	73	1854	74.36	1888.7	11.55
11/5VK750	11	75	1905	76.36	1939.5	11.88
11/5VK800	11	80	2032	81.36	2066.5	12.65
11/5VK850	11	85	2159	86.36	2193.5	13.42
11/5VK870	11	87	2210	88.36	2244.3	13.75
11/5VK900	11	90	2286	91.36	2320.5	14.3
11/5VK950	11	95	2413	96.36	2447.5	15.07
11/5VK1000	11	100	2540	101.36	2574.5	15.84
11/5VK1060	11	106	2692	107.36	2726.9	16.83
11/5VK1120	11	112	2845	113.36	2879.3	17.71
11/5VK1180	11	118	2997	119.36	3031.7	18.7
11/5VK1250	11	125	3175	126.36	3209.5	19.8

BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT



5VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
11/5VK1320	11	132	3353	133.36	3387.3	20.9
11/5VK1400	11	140	3556	141.36	3590.5	22.22
11/5VK1500	11	150	3810	151.36	3844.5	23.76
11/5VK1600	11	160	4064	161.36	4098.5	25.3
11/5VK1700	11	170	4318	171.36	4352.5	26.95
11/5VK1800	11	180	4572	181.36	4606.5	28.49
11/5VK1900	11	190	4826	191.36	4860.5	30.14
11/5VK2000	11	200	5080	201.36	5114.5	31.68
11/5VK2030	11	203	5156	204.36	5190.7	32.12
11/5VK2120	11	212	5385	213.36	5419.3	33.55
11/5VK2240	11	224	5690	225.36	5724.1	35.42
11/5VK2360	11	236	5994	237.36	6028.9	37.4
11/5VK2500	11	250	6350	251.36	6384.5	39.6
11/5VK2650	11	265	6731	266.36	6765.5	41.91
11/5VK2800	11	280	7112	281.36	7146.5	44.33
11/5VK3000	11	300	7620	301.36	7654.5	47.52
11/5VK3150	11	315	8001	316.36	8035.5	49.83
11/5VK3350	11	335	8509	336.36	8543.5	53.02
11/5VK3550	11	355	9017	356.36	9051.5	56.21
12/5VK600	12	60	1524	61.36	1558.5	10.32
12/5VK630	12	63	1600	64.36	1634.7	10.92
12/5VK670	12	67	1702	68.36	1736.3	11.52
12/5VK710	12	71	1803	72.36	1837.9	12.24
12/5VK730	12	73	1854	74.36	1888.7	12.6
12/5VK750	12	75	1905	76.36	1939.5	12.96
12/5VK800	12	80	2032	81.36	2066.5	13.8
12/5VK850	12	85	2159	86.36	2193.5	14.64
12/5VK870	12	87	2210	88.36	2244.3	15
12/5VK900	12	90	2286	91.36	2320.5	15.6
12/5VK950	12	95	2413	96.36	2447.5	16.44
12/5VK1000	12	100	2540	101.36	2574.5	17.28
12/5VK1060	12	106	2692	107.36	2726.9	18.36
12/5VK1120	12	112	2845	113.36	2879.3	19.32
12/5VK1180	12	118	2997	119.36	3031.7	20.4
12/5VK1250	12	125	3175	126.36	3209.5	21.6
12/5VK1320	12	132	3353	133.36	3387.3	22.8
12/5VK1400	12	140	3556	141.36	3590.5	24.24
12/5VK1500	12	150	3810	151.36	3844.5	25.92
12/5VK1600	12	160	4064	161.36	4098.5	27.6
12/5VK1700	12	170	4318	171.36	4352.5	29.4
12/5VK1800	12	180	4572	181.36	4606.5	31.08
12/5VK1900	12	190	4826	191.36	4860.5	32.88
12/5VK2000	12	200	5080	201.36	5114.5	34.56
12/5VK2030	12	203	5156	204.36	5190.7	35.04
12/5VK2120	12	212	5385	213.36	5419.3	36.6
12/5VK2240	12	224	5690	225.36	5724.1	38.64
12/5VK2360	12	236	5994	237.36	6028.9	40.8

5VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
12/5VK2500	12	250	6350	251.36	6384.5	43.2
12/5VK2650	12	265	6731	266.36	6765.5	45.72
12/5VK2800	12	280	7112	281.36	7146.5	48.36
12/5VK3000	12	300	7620	301.36	7654.5	51.84
12/5VK3150	12	315	8001	316.36	8035.5	54.36
12/5VK3350	12	335	8509	336.36	8543.5	57.84
12/5VK3550	12	355	9017	356.36	9051.5	61.32
13/5VK600	13	60	1524	61.36	1558.5	11.18
13/5VK630	13	63	1600	64.36	1634.7	11.83
13/5VK670	13	67	1702	68.36	1736.3	12.48
13/5VK710	13	71	1803	72.36	1837.9	13.26
13/5VK730	13	73	1854	74.36	1888.7	13.65
13/5VK750	13	75	1905	76.36	1939.5	14.04
13/5VK800	13	80	2032	81.36	2066.5	14.95
13/5VK850	13	85	2159	86.36	2193.5	15.86
13/5VK870	13	87	2210	88.36	2244.3	16.25
13/5VK900	13	90	2286	91.36	2320.5	16.9
13/5VK950	13	95	2413	96.36	2447.5	17.81
13/5VK1000	13	100	2540	101.36	2574.5	18.72
13/5VK1060	13	106	2692	107.36	2726.9	19.89
13/5VK1120	13	112	2845	113.36	2879.3	20.93
13/5VK1180	13	118	2997	119.36	3031.7	22.1
13/5VK1250	13	125	3175	126.36	3209.5	23.4
13/5VK1320	13	132	3353	133.36	3387.3	24.7
13/5VK1400	13	140	3556	141.36	3590.5	26.26
13/5VK1500	13	150	3810	151.36	3844.5	28.08
13/5VK1600	13	160	4064	161.36	4098.5	29.9
13/5VK1700	13	170	4318	171.36	4352.5	31.85
13/5VK1800	13	180	4572	181.36	4606.5	33.67
13/5VK1900	13	190	4826	191.36	4860.5	35.62
13/5VK2000	13	200	5080	201.36	5114.5	37.44
13/5VK2030	13	203	5156	204.36	5190.7	37.96
13/5VK2120	13	212	5385	213.36	5419.3	39.65
13/5VK2240	13	224	5690	225.36	5724.1	41.86
13/5VK2360	13	236	5994	237.36	6028.9	44.2
13/5VK2500	13	250	6350	251.36	6384.5	46.8
13/5VK2650	13	265	6731	266.36	6765.5	49.53
13/5VK2800	13	280	7112	281.36	7146.5	52.39
13/5VK3000	13	300	7620	301.36	7654.5	56.16
13/5VK3150	13	315	8001	316.36	8035.5	58.89
13/5VK3350	13	335	8509	336.36	8543.5	62.66
13/5VK3550	13	355	9017	356.36	9051.5	66.43
14/5VK600	14	60	1524	61.36	1558.5	12.04
14/5VK630	14	63	1600	64.36	1634.7	12.74
14/5VK670	14	67	1702	68.36	1736.3	13.44
14/5VK710	14	71	1803	72.36	1837.9	14.28
14/5VK730	14	73	1854	74.36	1888.7	14.7

BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT



5VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
14/5VK750	14	75	1905	76.36	1939.5	15.12
14/5VK800	14	80	2032	81.36	2066.5	16.1
14/5VK850	14	85	2159	86.36	2193.5	17.08
14/5VK870	14	87	2210	88.36	2244.3	17.5
14/5VK900	14	90	2286	91.36	2320.5	18.2
14/5VK950	14	95	2413	96.36	2447.5	19.18
14/5VK1000	14	100	2540	101.36	2574.5	20.16
14/5VK1060	14	106	2692	107.36	2726.9	21.42
14/5VK1120	14	112	2845	113.36	2879.3	22.54
14/5VK1180	14	118	2997	119.36	3031.7	23.8
14/5VK1250	14	125	3175	126.36	3209.5	25.2
14/5VK1320	14	132	3353	133.36	3387.3	26.6
14/5VK1400	14	140	3556	141.36	3590.5	28.28
14/5VK1500	14	150	3810	151.36	3844.5	30.24
14/5VK1600	14	160	4064	161.36	4098.5	32.2
14/5VK1700	14	170	4318	171.36	4352.5	34.3
14/5VK1800	14	180	4572	181.36	4606.5	36.26
14/5VK1900	14	190	4826	191.36	4860.5	38.36
14/5VK2000	14	200	5080	201.36	5114.5	40.32
14/5VK2030	14	203	5156	204.36	5190.7	40.88
14/5VK2120	14	212	5385	213.36	5419.3	42.7
14/5VK2240	14	224	5690	225.36	5724.1	45.08
14/5VK2360	14	236	5994	237.36	6028.9	47.6
14/5VK2500	14	250	6350	251.36	6384.5	50.4
14/5VK2650	14	265	6731	266.36	6765.5	53.34
14/5VK2800	14	280	7112	281.36	7146.5	56.42
14/5VK3000	14	300	7620	301.36	7654.5	60.48
14/5VK3150	14	315	8001	316.36	8035.5	63.42
14/5VK3350	14	335	8509	336.36	8543.5	67.48
14/5VK3550	14	355	9017	356.36	9051.5	71.54
15/5VK600	15	60	1524	61.36	1558.5	12.9
15/5VK630	15	63	1600	64.36	1634.7	13.65
15/5VK670	15	67	1702	68.36	1736.3	14.4
15/5VK710	15	71	1803	72.36	1837.9	15.3
15/5VK730	15	73	1854	74.36	1888.7	15.75
15/5VK750	15	75	1905	76.36	1939.5	16.2
15/5VK800	15	80	2032	81.36	2066.5	17.25
15/5VK850	15	85	2159	86.36	2193.5	18.3
15/5VK870	15	87	2210	88.36	2244.3	18.75
15/5VK900	15	90	2286	91.36	2320.5	19.5
15/5VK950	15	95	2413	96.36	2447.5	20.55
15/5VK1000	15	100	2540	101.36	2574.5	21.6
15/5VK1060	15	106	2692	107.36	2726.9	22.95
15/5VK1120	15	112	2845	113.36	2879.3	24.15
15/5VK1180	15	118	2997	119.36	3031.7	25.5
15/5VK1250	15	125	3175	126.36	3209.5	27
15/5VK1320	15	132	3353	133.36	3387.3	28.5


5VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
15/5VK1400	15	140	3556	141.36	3590.5	30.3
15/5VK1500	15	150	3810	151.36	3844.5	32.4
15/5VK1600	15	160	4064	161.36	4098.5	34.5
15/5VK1700	15	170	4318	171.36	4352.5	36.75
15/5VK1800	15	180	4572	181.36	4606.5	38.85
15/5VK1900	15	190	4826	191.36	4860.5	41.1
15/5VK2000	15	200	5080	201.36	5114.5	43.2
15/5VK2030	15	203	5156	204.36	5190.7	43.8
15/5VK2120	15	212	5385	213.36	5419.3	45.75
15/5VK2240	15	224	5690	225.36	5724.1	48.3
15/5VK2360	15	236	5994	237.36	6028.9	51
15/5VK2500	15	250	6350	251.36	6384.5	54
15/5VK2650	15	265	6731	266.36	6765.5	57.15
15/5VK2800	15	280	7112	281.36	7146.5	60.45
15/5VK3000	15	300	7620	301.36	7654.5	64.8
15/5VK3150	15	315	8001	316.36	8035.5	67.95
15/5VK3350	15	335	8509	336.36	8543.5	72.3
15/5VK3550	15	355	9017	356.36	9051.5	76.65
16/5VK600	16	60	1524	61.36	1558.5	13.76
16/5VK630	16	63	1600	64.36	1634.7	14.56
16/5VK670	16	67	1702	68.36	1736.3	15.36
16/5VK710	16	71	1803	72.36	1837.9	16.32
16/5VK730	16	73	1854	74.36	1888.7	16.8
16/5VK750	16	75	1905	76.36	1939.5	17.28
16/5VK800	16	80	2032	81.36	2066.5	18.4
16/5VK850	16	85	2159	86.36	2193.5	19.52
16/5VK870	16	87	2210	88.36	2244.3	20
16/5VK900	16	90	2286	91.36	2320.5	20.8
16/5VK950	16	95	2413	96.36	2447.5	21.92
16/5VK1000	16	100	2540	101.36	2574.5	23.04
16/5VK1060	16	106	2692	107.36	2726.9	24.48
16/5VK1120	16	112	2845	113.36	2879.3	25.76
16/5VK1180	16	118	2997	119.36	3031.7	27.2
16/5VK1250	16	125	3175	126.36	3209.5	28.8
16/5VK1320	16	132	3353	133.36	3387.3	30.4
16/5VK1400	16	140	3556	141.36	3590.5	32.32
16/5VK1500	16	150	3810	151.36	3844.5	34.56
16/5VK1600	16	160	4064	161.36	4098.5	36.8
16/5VK1700	16	170	4318	171.36	4352.5	39.2
16/5VK1800	16	180	4572	181.36	4606.5	41.44
16/5VK1900	16	190	4826	191.36	4860.5	43.84
16/5VK2000	16	200	5080	201.36	5114.5	46.08
16/5VK2030	16	203	5156	204.36	5190.7	46.72
16/5VK2120	16	212	5385	213.36	5419.3	48.8
16/5VK2240	16	224	5690	225.36	5724.1	51.52
16/5VK2360	16	236	5994	237.36	6028.9	54.4
16/5VK2500	16	250	6350	251.36	6384.5	57.6

BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT

5VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
16/5VK2650	16	265	6731	266.36	6765.5	60.96
16/5VK2800	16	280	7112	281.36	7146.5	64.48
16/5VK3000	16	300	7620	301.36	7654.5	69.12
16/5VK3150	16	315	8001	316.36	8035.5	72.48
16/5VK3350	16	335	8509	336.36	8543.5	77.12
16/5VK3550	16	355	9017	356.36	9051.5	81.76



BELT PART NUMBER NOMENCLATURE

Belt No: 3/8VK1060
 3/ - Number of Ribs
 8V - Profile
 K - Aramid Cord
 1060 - Inside Circumference (Inches in tenths: 106.0")

8VK

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/8VK1000	2	100	2540	101.48	2577.6	7.18
2/8VK1060	2	106	2692	107.48	2730	7.6
2/8VK1120	2	112	2845	113.48	2882.4	8.04
2/8VK1180	2	118	2997	119.48	3034.8	8.48
2/8VK1250	2	125	3175	126.48	3212.6	8.98
2/8VK1320	2	132	3353	133.48	3390.4	9.48
2/8VK1400	2	140	3556	141.48	3593.6	10.04
2/8VK1500	2	150	3810	151.48	3847.6	10.76
2/8VK1600	2	160	4064	161.48	4101.6	11.48
2/8VK1700	2	170	4318	171.48	4355.6	12.2
2/8VK1800	2	180	4572	181.48	4609.6	12.92
2/8VK1900	2	190	4826	191.48	4863.6	13.64
2/8VK2000	2	200	5080	201.48	5117.6	14.36
2/8VK2120	2	212	5385	213.48	5422.4	15.22
2/8VK2240	2	224	5690	225.48	5727.2	16.08
2/8VK1500	2	150	3810	151.48	3847.6	10.76
2/8VK1600	2	160	4064	161.48	4101.6	11.48
2/8VK1700	2	170	4318	171.48	4355.6	12.2
2/8VK1800	2	180	4572	181.48	4609.6	12.92
2/8VK1900	2	190	4826	191.48	4863.6	13.64
2/8VK2000	2	200	5080	201.48	5117.6	14.36
2/8VK2120	2	212	5385	213.48	5422.4	15.22
2/8VK2240	2	224	5690	225.48	5727.2	16.08
2/8VK2360	2	236	5994	237.48	6032	16.94
2/8VK2500	2	250	6350	251.48	6387.6	17.94
2/8VK2650	2	265	6731	266.48	6768.6	19.02
2/8VK2800	2	280	7112	281.48	7149.6	20.1
2/8VK3000	2	300	7620	301.48	7657.6	21.54
2/8VK3150	2	315	8001	316.48	8038.6	22.62

8VK

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/8VK3350	2	335	8509	336.48	8546.6	24.04
2/8VK3550	2	355	9017	356.48	9054.6	25.48
2/8VK3750	2	375	9525	376.48	9562.6	26.92
2/8VK4000	2	400	10160	401.48	10197.6	28.72
2/8VK4250	2	425	10795	426.48	10832.6	30.5
2/8VK4500	2	450	11430	451.48	11467.6	32.3
2/8VK4750	2	475	12065	476.48	12102.6	34.1
2/8VK5000	2	500	12700	501.48	12737.6	35.9
2/8VK5600	2	560	14224	561.48	14261.6	40.2
2/8VK6000	2	600	15240	601.48	15277.6	43.06
3/8VK1000	3	100	2540	101.48	2577.6	10.77
3/8VK1060	3	106	2692	107.48	2730	11.4
3/8VK1120	3	112	2845	113.48	2882.4	12.06
3/8VK1180	3	118	2997	119.48	3034.8	12.72
3/8VK1250	3	125	3175	126.48	3212.6	13.47
3/8VK1320	3	132	3353	133.48	3390.4	14.22
3/8VK1400	3	140	3556	141.48	3593.6	15.06
3/8VK1500	3	150	3810	151.48	3847.6	16.14
3/8VK1600	3	160	4064	161.48	4101.6	17.22
3/8VK1700	3	170	4318	171.48	4355.6	18.3
3/8VK1800	3	180	4572	181.48	4609.6	19.38
3/8VK1900	3	190	4826	191.48	4863.6	20.46
3/8VK2000	3	200	5080	201.48	5117.6	21.54
3/8VK2120	3	212	5385	213.48	5422.4	22.83
3/8VK2240	3	224	5690	225.48	5727.2	24.12
3/8VK2360	3	236	5994	237.48	6032	25.41
3/8VK2500	3	250	6350	251.48	6387.6	26.91
3/8VK2650	3	265	6731	266.48	6768.6	28.53
3/8VK2800	3	280	7112	281.48	7149.6	30.15
3/8VK3000	3	300	7620	301.48	7657.6	32.31
3/8VK3150	3	315	8001	316.48	8038.6	33.93
3/8VK3350	3	335	8509	336.48	8546.6	36.06
3/8VK3550	3	355	9017	356.48	9054.6	38.22
3/8VK3750	3	375	9525	376.48	9562.6	40.38
3/8VK4000	3	400	10160	401.48	10197.6	43.08
3/8VK4250	3	425	10795	426.48	10832.6	45.75
3/8VK4500	3	450	11430	451.48	11467.6	48.45
3/8VK4750	3	475	12065	476.48	12102.6	51.15
3/8VK5000	3	500	12700	501.48	12737.6	53.85
3/8VK5600	3	560	14224	561.48	14261.6	60.3
3/8VK6000	3	600	15240	601.48	15277.6	64.59
4/8VK1000	4	100	2540	101.48	2577.6	14.36
4/8VK1060	4	106	2692	107.48	2730	15.2
4/8VK1120	4	112	2845	113.48	2882.4	16.08
4/8VK1180	4	118	2997	119.48	3034.8	16.96
4/8VK1250	4	125	3175	126.48	3212.6	17.96
4/8VK1320	4	132	3353	133.48	3390.4	18.96

BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT



8VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
4/8VK1400	4	140	3556	141.48	3593.6	20.08
4/8VK1500	4	150	3810	151.48	3847.6	21.52
4/8VK1600	4	160	4064	161.48	4101.6	22.96
4/8VK1700	4	170	4318	171.48	4355.6	24.4
4/8VK1800	4	180	4572	181.48	4609.6	25.84
4/8VK1900	4	190	4826	191.48	4863.6	27.28
4/8VK2000	4	200	5080	201.48	5117.6	28.72
4/8VK2120	4	212	5385	213.48	5422.4	30.44
4/8VK2240	4	224	5690	225.48	5727.2	32.16
4/8VK2360	4	236	5994	237.48	6032	33.88
4/8VK2500	4	250	6350	251.48	6387.6	35.88
4/8VK2650	4	265	6731	266.48	6768.6	38.04
4/8VK2800	4	280	7112	281.48	7149.6	40.2
4/8VK3000	4	300	7620	301.48	7657.6	43.08
4/8VK3150	4	315	8001	316.48	8038.6	45.24
4/8VK3350	4	335	8509	336.48	8546.6	48.08
4/8VK3550	4	355	9017	356.48	9054.6	50.96
4/8VK3750	4	375	9525	376.48	9562.6	53.84
4/8VK4000	4	400	10160	401.48	10197.6	57.44
4/8VK4250	4	425	10795	426.48	10832.6	61
4/8VK4500	4	450	11430	451.48	11467.6	64.6
4/8VK4750	4	475	12065	476.48	12102.6	68.2
4/8VK5000	4	500	12700	501.48	12737.6	71.8
4/8VK5600	4	560	14224	561.48	14261.6	80.4
4/8VK6000	4	600	15240	601.48	15277.6	86.12
5/8VK1000	5	100	2540	101.48	2577.6	17.95
5/8VK1060	5	106	2692	107.48	2730	19
5/8VK1120	5	112	2845	113.48	2882.4	20.1
5/8VK1180	5	118	2997	119.48	3034.8	21.2
5/8VK1250	5	125	3175	126.48	3212.6	22.45
5/8VK1320	5	132	3353	133.48	3390.4	23.7
5/8VK1400	5	140	3556	141.48	3593.6	25.1
5/8VK1500	5	150	3810	151.48	3847.6	26.9
5/8VK1600	5	160	4064	161.48	4101.6	28.7
5/8VK1700	5	170	4318	171.48	4355.6	30.5
5/8VK1800	5	180	4572	181.48	4609.6	32.3
5/8VK1900	5	190	4826	191.48	4863.6	34.1
5/8VK2000	5	200	5080	201.48	5117.6	35.9
5/8VK2120	5	212	5385	213.48	5422.4	38.05
5/8VK2240	5	224	5690	225.48	5727.2	40.2
5/8VK2360	5	236	5994	237.48	6032	42.35

8VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
5/8VK2500	5	250	6350	251.48	6387.6	44.85
5/8VK2650	5	265	6731	266.48	6768.6	47.55
5/8VK2800	5	280	7112	281.48	7149.6	50.25
5/8VK3000	5	300	7620	301.48	7657.6	53.85
5/8VK3150	5	315	8001	316.48	8038.6	56.55
5/8VK3350	5	335	8509	336.48	8546.6	60.1
5/8VK3550	5	355	9017	356.48	9054.6	63.7
5/8VK3750	5	375	9525	376.48	9562.6	67.3
5/8VK4000	5	400	10160	401.48	10197.6	71.8
5/8VK4250	5	425	10795	426.48	10832.6	76.25
5/8VK4500	5	450	11430	451.48	11467.6	80.75
5/8VK4750	5	475	12065	476.48	12102.6	85.25
5/8VK5000	5	500	12700	501.48	12737.6	89.75
5/8VK5600	5	560	14224	561.48	14261.6	100.5
5/8VK6000	5	600	15240	601.48	15277.6	107.65
6/8VK1000	6	100	2540	101.48	2577.6	21.54
6/8VK1060	6	106	2692	107.48	2730	22.8
6/8VK1120	6	112	2845	113.48	2882.4	24.12
6/8VK1180	6	118	2997	119.48	3034.8	25.44
6/8VK1250	6	125	3175	126.48	3212.6	26.94
6/8VK1320	6	132	3353	133.48	3390.4	28.44
6/8VK1400	6	140	3556	141.48	3593.6	30.12
6/8VK1500	6	150	3810	151.48	3847.6	32.28
6/8VK1600	6	160	4064	161.48	4101.6	34.44
6/8VK1700	6	170	4318	171.48	4355.6	36.6
6/8VK1800	6	180	4572	181.48	4609.6	38.76
6/8VK1900	6	190	4826	191.48	4863.6	40.92
6/8VK2000	6	200	5080	201.48	5117.6	43.08
6/8VK2120	6	212	5385	213.48	5422.4	45.66
6/8VK2240	6	224	5690	225.48	5727.2	48.24
6/8VK2360	6	236	5994	237.48	6032	50.82
6/8VK2500	6	250	6350	251.48	6387.6	53.82
6/8VK2650	6	265	6731	266.48	6768.6	57.06
6/8VK2800	6	280	7112	281.48	7149.6	60.3
6/8VK3000	6	300	7620	301.48	7657.6	64.62
6/8VK3150	6	315	8001	316.48	8038.6	67.86
6/8VK3350	6	335	8509	336.48	8546.6	72.12
6/8VK3550	6	355	9017	356.48	9054.6	76.44
6/8VK3750	6	375	9525	376.48	9562.6	80.76
6/8VK4000	6	400	10160	401.48	10197.6	86.16
6/8VK4250	6	425	10795	426.48	10832.6	91.5
6/8VK4500	6	450	11430	451.48	11467.6	96.9
6/8VK4750	6	475	12065	476.48	12102.6	102.3
6/8VK5000	6	500	12700	501.48	12737.6	107.7
6/8VK5600	6	560	14224	561.48	14261.6	120.6
6/8VK6000	6	600	15240	601.48	15277.6	129.18
7/8VK1000	7	100	2540	101.48	2577.6	25.13

BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT



8VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
7/8VK1060	7	106	2692	107.48	2730	26.6
7/8VK1120	7	112	2845	113.48	2882.4	28.14
7/8VK1180	7	118	2997	119.48	3034.8	29.68
7/8VK1250	7	125	3175	126.48	3212.6	31.43
7/8VK1320	7	132	3353	133.48	3390.4	33.18
7/8VK1400	7	140	3556	141.48	3593.6	35.14
7/8VK1500	7	150	3810	151.48	3847.6	37.66
7/8VK1600	7	160	4064	161.48	4101.6	40.18
7/8VK1700	7	170	4318	171.48	4355.6	42.7
7/8VK1800	7	180	4572	181.48	4609.6	45.22
7/8VK1900	7	190	4826	191.48	4863.6	47.74
7/8VK2000	7	200	5080	201.48	5117.6	50.26
7/8VK2120	7	212	5385	213.48	5422.4	53.27
7/8VK2240	7	224	5690	225.48	5727.2	56.28
7/8VK2360	7	236	5994	237.48	6032	59.29
7/8VK2500	7	250	6350	251.48	6387.6	62.79
7/8VK2650	7	265	6731	266.48	6768.6	66.57
7/8VK2800	7	280	7112	281.48	7149.6	70.35
7/8VK3000	7	300	7620	301.48	7657.6	75.39
7/8VK3150	7	315	8001	316.48	8038.6	79.17
7/8VK3350	7	335	8509	336.48	8546.6	84.14
7/8VK3550	7	355	9017	356.48	9054.6	89.18
7/8VK3750	7	375	9525	376.48	9562.6	94.22
7/8VK4000	7	400	10160	401.48	10197.6	100.52
7/8VK4250	7	425	10795	426.48	10832.6	106.75
7/8VK4500	7	450	11430	451.48	11467.6	113.05
7/8VK4750	7	475	12065	476.48	12102.6	119.35
7/8VK5000	7	500	12700	501.48	12737.6	125.65
7/8VK5600	7	560	14224	561.48	14261.6	140.7
7/8VK6000	7	600	15240	601.48	15277.6	150.71
8/8VK1000	8	100	2540	101.48	2577.6	28.72
8/8VK1060	8	106	2692	107.48	2730	30.4
8/8VK1120	8	112	2845	113.48	2882.4	32.16
8/8VK1180	8	118	2997	119.48	3034.8	33.92
8/8VK1250	8	125	3175	126.48	3212.6	35.92
8/8VK1320	8	132	3353	133.48	3390.4	37.92
8/8VK1400	8	140	3556	141.48	3593.6	40.16
8/8VK1500	8	150	3810	151.48	3847.6	43.04
8/8VK1600	8	160	4064	161.48	4101.6	45.92
8/8VK1700	8	170	4318	171.48	4355.6	48.8
8/8VK1800	8	180	4572	181.48	4609.6	51.68
8/8VK1900	8	190	4826	191.48	4863.6	54.56
8/8VK2000	8	200	5080	201.48	5117.6	57.44
8/8VK2120	8	212	5385	213.48	5422.4	60.88
8/8VK2240	8	224	5690	225.48	5727.2	64.32
8/8VK2360	8	236	5994	237.48	6032	67.76
8/8VK2500	8	250	6350	251.48	6387.6	71.76

8VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
8/8VK2650	8	265	6731	266.48	6768.6	76.08
8/8VK2800	8	280	7112	281.48	7149.6	80.4
8/8VK3000	8	300	7620	301.48	7657.6	86.16
8/8VK3150	8	315	8001	316.48	8038.6	90.48
8/8VK3350	8	335	8509	336.48	8546.6	96.16
8/8VK3550	8	355	9017	356.48	9054.6	101.92
8/8VK3750	8	375	9525	376.48	9562.6	107.68
8/8VK4000	8	400	10160	401.48	10197.6	114.88
8/8VK4250	8	425	10795	426.48	10832.6	122
8/8VK4500	8	450	11430	451.48	11467.6	129.2
8/8VK4750	8	475	12065	476.48	12102.6	136.4
8/8VK5000	8	500	12700	501.48	12737.6	143.6
8/8VK5600	8	560	14224	561.48	14261.6	160.8
8/8VK6000	8	600	15240	601.48	15277.6	172.24
9/8VK1000	9	100	2540	101.48	2577.6	32.31
9/8VK1060	9	106	2692	107.48	2730	34.2
9/8VK1120	9	112	2845	113.48	2882.4	36.18
9/8VK1180	9	118	2997	119.48	3034.8	38.16
9/8VK1250	9	125	3175	126.48	3212.6	40.41
9/8VK1320	9	132	3353	133.48	3390.4	42.66
9/8VK1400	9	140	3556	141.48	3593.6	45.18
9/8VK1500	9	150	3810	151.48	3847.6	48.42
9/8VK1600	9	160	4064	161.48	4101.6	51.66
9/8VK1700	9	170	4318	171.48	4355.6	54.9
9/8VK1800	9	180	4572	181.48	4609.6	58.14
9/8VK1180	9	118	2997	119.48	3034.8	38.16
9/8VK1250	9	125	3175	126.48	3212.6	40.41
9/8VK1320	9	132	3353	133.48	3390.4	42.66
9/8VK1400	9	140	3556	141.48	3593.6	45.18
9/8VK1500	9	150	3810	151.48	3847.6	48.42
9/8VK1600	9	160	4064	161.48	4101.6	51.66
9/8VK1700	9	170	4318	171.48	4355.6	54.9
9/8VK1800	9	180	4572	181.48	4609.6	58.14
9/8VK1900	9	190	4826	191.48	4863.6	61.38
9/8VK2000	9	200	5080	201.48	5117.6	64.62
9/8VK2120	9	212	5385	213.48	5422.4	68.49
9/8VK2240	9	224	5690	225.48	5727.2	72.36
9/8VK1900	9	190	4826	191.48	4863.6	61.38
9/8VK2000	9	200	5080	201.48	5117.6	64.62
9/8VK2120	9	212	5385	213.48	5422.4	68.49
9/8VK2240	9	224	5690	225.48	5727.2	72.36
9/8VK2360	9	236	5994	237.48	6032	76.23
9/8VK2500	9	250	6350	251.48	6387.6	80.73
9/8VK2650	9	265	6731	266.48	6768.6	85.59
9/8VK2800	9	280	7112	281.48	7149.6	90.45
9/8VK3000	9	300	7620	301.48	7657.6	96.93
9/8VK3150	9	315	8001	316.48	8038.6	101.79

BANDED NARROW ARAMID WRAPPED 3VK, 5VK, 8VK V-BELT



8VK continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
9/8VK3350	9	335	8509	336.48	8546.6	108.18
9/8VK3550	9	355	9017	356.48	9054.6	114.66
9/8VK3750	9	375	9525	376.48	9562.6	121.14
9/8VK4000	9	400	10160	401.48	10197.6	129.24
9/8VK4250	9	425	10795	426.48	10832.6	137.25
9/8VK4500	9	450	11430	451.48	11467.6	145.35
9/8VK4750	9	475	12065	476.48	12102.6	153.45
9/8VK5000	9	500	12700	501.48	12737.6	161.55
9/8VK5600	9	560	14224	561.48	14261.6	180.9
9/8VK6000	9	600	15240	601.48	15277.6	193.77
10/8VK1000	10	100	2540	101.48	2577.6	35.9
10/8VK1060	10	106	2692	107.48	2730	38
10/8VK1120	10	112	2845	113.48	2882.4	40.2
10/8VK1180	10	118	2997	119.48	3034.8	42.4
10/8VK1250	10	125	3175	126.48	3212.6	44.9
10/8VK1320	10	132	3353	133.48	3390.4	47.4
10/8VK1400	10	140	3556	141.48	3593.6	50.2
10/8VK1500	10	150	3810	151.48	3847.6	53.8
10/8VK1600	10	160	4064	161.48	4101.6	57.4
10/8VK1700	10	170	4318	171.48	4355.6	61
10/8VK1800	10	180	4572	181.48	4609.6	64.6
10/8VK4750	10	475	12065	476.48	12102.6	170.5
10/8VK5000	10	500	12700	501.48	12737.6	179.5
10/8VK5600	10	560	14224	561.48	14261.6	201
10/8VK6000	10	600	15240	601.48	15277.6	215.3
11/8VK1000	11	100	2540	101.48	2577.6	39.49
11/8VK1060	11	106	2692	107.48	2730	41.8
11/8VK1120	11	112	2845	113.48	2882.4	44.22
11/8VK1180	11	118	2997	119.48	3034.8	46.64
11/8VK1250	11	125	3175	126.48	3212.6	49.39
11/8VK1320	11	132	3353	133.48	3390.4	52.14
11/8VK1400	11	140	3556	141.48	3593.6	55.22
11/8VK1500	11	150	3810	151.48	3847.6	59.18
11/8VK1600	11	160	4064	161.48	4101.6	63.14
11/8VK1700	11	170	4318	171.48	4355.6	67.1
11/8VK1800	11	180	4572	181.48	4609.6	71.06
11/8VK1900	11	190	4826	191.48	4863.6	75.02
11/8VK2000	11	200	5080	201.48	5117.6	78.98
11/8VK2120	11	212	5385	213.48	5422.4	83.71
11/8VK2240	11	224	5690	225.48	5727.2	88.44
11/8VK2360	11	236	5994	237.48	6032	93.17
11/8VK2500	11	250	6350	251.48	6387.6	98.67
11/8VK2650	11	265	6731	266.48	6768.6	104.61
11/8VK2800	11	280	7112	281.48	7149.6	110.55
11/8VK3000	11	300	7620	301.48	7657.6	118.47
11/8VK3150	11	315	8001	316.48	8038.6	124.41
11/8VK3350	11	335	8509	336.48	8546.6	132.22
11/8VK3550	11	355	9017	356.48	9054.6	140.14

8VK continue


Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
11/8VK3750	11	375	9525	376.48	9562.6	148.06
11/8VK4000	11	400	10160	401.48	10197.6	157.96
11/8VK4250	11	425	10795	426.48	10832.6	167.75
11/8VK4500	11	450	11430	451.48	11467.6	177.65
11/8VK4750	11	475	12065	476.48	12102.6	187.55
11/8VK5000	11	500	12700	501.48	12737.6	197.45
11/8VK5600	11	560	14224	561.48	14261.6	221.1
11/8VK6000	11	600	15240	601.48	15277.6	236.83
12/8VK1000	12	100	2540	101.48	2577.6	43.08
12/8VK1060	12	106	2692	107.48	2730	45.6
12/8VK1120	12	112	2845	113.48	2882.4	48.24
12/8VK1180	12	118	2997	119.48	3034.8	50.88
12/8VK1250	12	125	3175	126.48	3212.6	53.88
12/8VK1320	12	132	3353	133.48	3390.4	56.88
12/8VK1400	12	140	3556	141.48	3593.6	60.24
12/8VK1500	12	150	3810	151.48	3847.6	64.56
12/8VK1600	12	160	4064	161.48	4101.6	68.88
12/8VK1700	12	170	4318	171.48	4355.6	73.2
12/8VK1800	12	180	4572	181.48	4609.6	77.52
12/8VK1900	12	190	4826	191.48	4863.6	81.84
12/8VK2000	12	200	5080	201.48	5117.6	86.16
12/8VK2120	12	212	5385	213.48	5422.4	91.32
12/8VK2240	12	224	5690	225.48	5727.2	96.48
12/8VK2360	12	236	5994	237.48	6032	101.64
12/8VK2500	12	250	6350	251.48	6387.6	107.64
12/8VK2650	12	265	6731	266.48	6768.6	114.12
12/8VK2800	12	280	7112	281.48	7149.6	120.6
12/8VK3000	12	300	7620	301.48	7657.6	129.24
12/8VK3150	12	315	8001	316.48	8038.6	135.72
12/8VK3350	12	335	8509	336.48	8546.6	144.24
12/8VK3550	12	355	9017	356.48	9054.6	152.88
12/8VK3750	12	375	9525	376.48	9562.6	161.52
12/8VK4000	12	400	10160	401.48	10197.6	172.32
12/8VK4250	12	425	10795	426.48	10832.6	183
12/8VK4500	12	450	11430	451.48	11467.6	193.8
12/8VK4750	12	475	12065	476.48	12102.6	204.6
12/8VK5000	12	500	12700	501.48	12737.6	215.4
12/8VK5600	12	560	14224	561.48	14261.6	241.2
12/8VK6000	12	600	15240	601.48	15277.6	258.36
14/8VK3000	14	300	7620	301.48	7657.6	2714.04
14/8VK3150	14	315	8001	316.48	8038.6	113.1
23/8VK2800	23	280	7112	281.48	7149.6	231.15

*Additional Length May Be Available.
Contact us for more information.

BANDED NARROW COGGED 3VX, 5VX V-BELT

Goodyear Belts has developed Narrow Cogged V-belts that offer premium performance, providing a long service life. Profile provides more contact allowing higher torque and a more compact drive design. Restore your belt drive system's efficiency by installing a new Goodyear Belt.

BELT CONSTRUCTION 3VX / 5VX

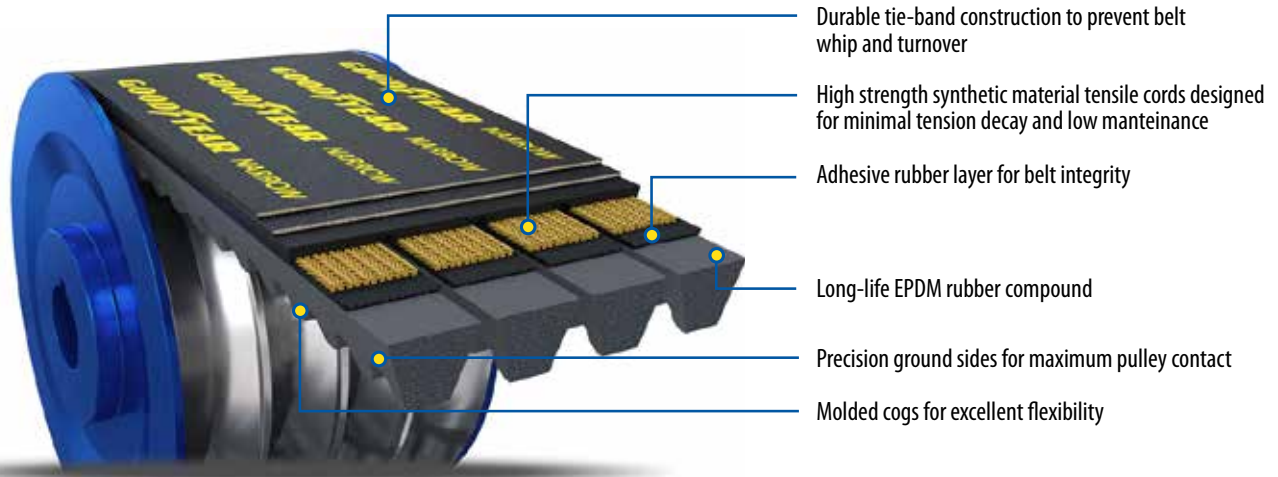

- Durable tie-band construction to prevent belt whip and turnover
- High strength synthetic material tensile cords designed for minimal tension decay and low maintenance
- Adhesive rubber layer for belt integrity
- Long-life EPDM rubber compound
- Precision ground sides for maximum pulley contact
- Molded cogs for excellent flexibility

FEATURES & BENEFITS


- **Efficient Power Transmission:** The coggled design and raw edge construction contribute to efficient power transmission, minimizing energy loss and improving overall system performance.
- **Suitable for Heavy-Duty Applications:** The banded construction and high load-carrying capacity make these belts suitable for heavy-duty industrial applications with demanding power transmission needs.
- Meets ARPM/RMA IP-3-2 oil and heat resistant standards.
- Meets ARPM/RMA IP-3-3 static conductivity requirements.
- **TEMPERATURE RANGE:**
-51°C/-70°F to +121°C /+250°F.

BELT PART NUMBER NOMENCLATURE

Belt No: **2/3VX250**
2/ - Number of Ribs
3V - Profile
X - Molded Cogged
250 - Outside Circumference (Inches in tenths: 25.0")

PROFILE	FROM (INCH)	TO (INCH)	FROM (MM)	TO (MM)
3VX	25.0	140.0	635.0	3556.0
5VX	50.0	200.0	1270.0	5080.0


*Additional Length May Be Available.
Contact us for more information.

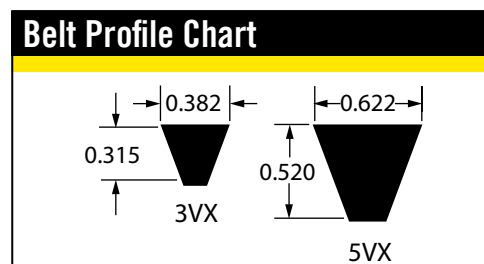

Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
Copyright 2023 The Goodyear Tire & Rubber Company

BANDED NARROW COGGED 3VX, 5VX V-BELT

BELT PART NUMBER NOMENCLATURE



Belt No: **3/3VX250**
3/ - Number of Ribs
3V - Profile
X - Molded Cogged
250 - Outside Circumference
(Inches in tenths: 25.0")

3VX

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/3VX250	2	25	635	26.11	663.2	0.24
2/3VX265	2	26.5	673	27.61	701.3	0.24
2/3VX280	2	28	711	29.11	739.4	0.26
2/3VX300	2	30	762	31.11	790.2	0.28
2/3VX315	2	31.5	800	32.61	828.3	0.3
2/3VX335	2	33.5	851	34.61	879.1	0.32
2/3VX355	2	35.5	902	36.61	929.9	0.32
2/3VX375	2	37.5	953	38.61	980.7	0.34
2/3VX400	2	40	1016	41.11	1044.2	0.38
2/3VX425	2	42.5	1080	43.61	1107.7	0.4
2/3VX450	2	45	1143	46.11	1171.2	0.42
2/3VX475	2	47.5	1207	48.61	1234.7	0.44
2/3VX500	2	50	1270	51.11	1298.2	0.46
2/3VX530	2	53	1346	54.11	1374.4	0.5
2/3VX560	2	56	1422	57.11	1450.6	0.52
2/3VX600	2	60	1524	61.11	1552.2	0.56
2/3VX630	2	63	1600	64.11	1628.4	0.58
2/3VX670	2	67	1702	68.11	1730	0.62
2/3VX710	2	71	1803	72.11	1831.6	0.66
2/3VX750	2	75	1905	76.11	1933.2	0.7
2/3VX800	2	80	2032	81.11	2060.2	0.74
2/3VX820	2	82	2083	83.11	2111	0.76
2/3VX850	2	85	2159	86.11	2187.2	0.78
2/3VX900	2	90	2286	91.11	2314.2	0.84
2/3VX950	2	95	2413	96.11	2441.2	0.88
2/3VX1000	2	100	2540	101.11	2568.2	0.92
2/3VX1060	2	106	2692	107.11	2720.6	0.98
2/3VX1120	2	112	2845	113.11	2873	1.04
2/3VX1180	2	118	2997	119.11	3025.4	1.1
2/3VX1250	2	125	3175	126.11	3203.2	1.16
2/3VX1320	2	132	3353	133.11	3381	1.22
2/3VX1400	2	140	3556	141.11	3584.2	1.3
2/3VX1180	2	118	2997	119.11	3025.4	1.1
2/3VX1250	2	125	3175	126.11	3203.2	1.16
2/3VX1320	2	132	3353	133.11	3381	1.22
2/3VX1400	2	140	3556	141.11	3584.2	1.3
3/3VX250	3	25	635	26.11	663.2	0.36
3/3VX265	3	26.5	673	27.61	701.3	0.36
3/3VX280	3	28	711	29.11	739.4	0.39
3/3VX300	3	30	762	31.11	790.2	0.42

3VX

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3/3VX315	3	31.5	800	32.61	828.3	0.45
3/3VX335	3	33.5	851	34.61	879.1	0.48
3/3VX355	3	35.5	902	36.61	929.9	0.48
3/3VX375	3	37.5	953	38.61	980.7	0.51
3/3VX400	3	40	1016	41.11	1044.2	0.57
3/3VX425	3	42.5	1080	43.61	1107.7	0.6
3/3VX450	3	45	1143	46.11	1171.2	0.63
3/3VX475	3	47.5	1207	48.61	1234.7	0.66
3/3VX500	3	50	1270	51.11	1298.2	0.69
3/3VX530	3	53	1346	54.11	1374.4	0.75
3/3VX560	3	56	1422	57.11	1450.6	0.78
3/3VX600	3	60	1524	61.11	1552.2	0.84
3/3VX630	3	63	1600	64.11	1628.4	0.87
3/3VX670	3	67	1702	68.11	1730	0.93
3/3VX710	3	71	1803	72.11	1831.6	0.99
3/3VX750	3	75	1905	76.11	1933.2	1.05
3/3VX800	3	80	2032	81.11	2060.2	1.11
3/3VX820	3	82	2083	83.11	2111	1.14
3/3VX850	3	85	2159	86.11	2187.2	1.17
3/3VX900	3	90	2286	91.11	2314.2	1.26
3/3VX950	3	95	2413	96.11	2441.2	1.32
3/3VX1000	3	100	2540	101.11	2568.2	1.38
3/3VX1060	3	106	2692	107.11	2720.6	1.47
3/3VX1120	3	112	2845	113.11	2873	1.56
3/3VX1180	3	118	2997	119.11	3025.4	1.65
3/3VX1250	3	125	3175	126.11	3203.2	1.74
3/3VX1320	3	132	3353	133.11	3381	1.83
3/3VX1400	3	140	3556	141.11	3584.2	1.95
4/3VX250	4	25	635	26.11	663.2	0.48
4/3VX265	4	26.5	673	27.61	701.3	0.48
4/3VX280	4	28	711	29.11	739.4	0.52
4/3VX300	4	30	762	31.11	790.2	0.56
4/3VX315	4	31.5	800	32.61	828.3	0.6
4/3VX335	4	33.5	851	34.61	879.1	0.64
4/3VX355	4	35.5	902	36.61	929.9	0.64
4/3VX375	4	37.5	953	38.61	980.7	0.68
4/3VX400	4	40	1016	41.11	1044.2	0.76
4/3VX425	4	42.5	1080	43.61	1107.7	0.8
4/3VX450	4	45	1143	46.11	1171.2	0.84
4/3VX475	4	47.5	1207	48.61	1234.7	0.88
4/3VX500	4	50	1270	51.11	1298.2	0.92
4/3VX530	4	53	1346	54.11	1374.4	1
4/3VX560	4	56	1422	57.11	1450.6	1.04
4/3VX600	4	60	1524	61.11	1552.2	1.12
4/3VX630	4	63	1600	64.11	1628.4	1.16
4/3VX670	4	67	1702	68.11	1730	1.24
4/3VX710	4	71	1803	72.11	1831.6	1.32

BANDED NARROW COGGED 3VX, 5VX V-BELT



3VX						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
4/3VX750	4	75	1905	76.11	1933.2	1.4
4/3VX800	4	80	2032	81.11	2060.2	1.48
4/3VX820	4	82	2083	83.11	2111	1.52
4/3VX850	4	85	2159	86.11	2187.2	1.56
4/3VX900	4	90	2286	91.11	2314.2	1.68
4/3VX950	4	95	2413	96.11	2441.2	1.76
4/3VX1000	4	100	2540	101.11	2568.2	1.84
4/3VX1060	4	106	2692	107.11	2720.6	1.96
4/3VX1120	4	112	2845	113.11	2873	2.08
4/3VX1180	4	118	2997	119.11	3025.4	2.2
4/3VX1250	4	125	3175	126.11	3203.2	2.32
4/3VX1320	4	132	3353	133.11	3381	2.44
4/3VX1400	4	140	3556	141.11	3584.2	2.6
5/3VX250	5	25	635	26.11	663.2	0.6
5/3VX265	5	26.5	673	27.61	701.3	0.6
5/3VX280	5	28	711	29.11	739.4	0.65
5/3VX300	5	30	762	31.11	790.2	0.7
5/3VX315	5	31.5	800	32.61	828.3	0.75
5/3VX335	5	33.5	851	34.61	879.1	0.8
5/3VX355	5	35.5	902	36.61	929.9	0.8
5/3VX375	5	37.5	953	38.61	980.7	0.85
5/3VX400	5	40	1016	41.11	1044.2	0.95
5/3VX425	5	42.5	1080	43.61	1107.7	1
5/3VX450	5	45	1143	46.11	1171.2	1.05
5/3VX475	5	47.5	1207	48.61	1234.7	1.1
5/3VX500	5	50	1270	51.11	1298.2	1.15
5/3VX530	5	53	1346	54.11	1374.4	1.25
5/3VX560	5	56	1422	57.11	1450.6	1.3
5/3VX600	5	60	1524	61.11	1552.2	1.4
5/3VX630	5	63	1600	64.11	1628.4	1.45
5/3VX670	5	67	1702	68.11	1730	1.55
5/3VX710	5	71	1803	72.11	1831.6	1.65
5/3VX750	5	75	1905	76.11	1933.2	1.75
5/3VX800	5	80	2032	81.11	2060.2	1.85
5/3VX820	5	82	2083	83.11	2111	1.9
5/3VX850	5	85	2159	86.11	2187.2	1.95
5/3VX900	5	90	2286	91.11	2314.2	2.1
5/3VX950	5	95	2413	96.11	2441.2	2.2
5/3VX1000	5	100	2540	101.11	2568.2	2.3
5/3VX1060	5	106	2692	107.11	2720.6	2.45
5/3VX1120	5	112	2845	113.11	2873	2.6
5/3VX1180	5	118	2997	119.11	3025.4	2.75
5/3VX1250	5	125	3175	126.11	3203.2	2.9
5/3VX1320	5	132	3353	133.11	3381	3.05
5/3VX1400	5	140	3556	141.11	3584.2	3.25
6/3VX300	6	30	762	31.11	790.2	0.84
6/3VX315	6	31.5	800	32.61	828.3	0.9
6/3VX335	6	33.5	851	34.61	879.1	0.96

3VX						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
6/3VX355	6	35.5	902	36.61	929.9	0.96
6/3VX375	6	37.5	953	38.61	980.7	1.02
6/3VX400	6	40	1016	41.11	1044.2	1.14
6/3VX425	6	42.5	1080	43.61	1107.7	1.2
6/3VX450	6	45	1143	46.11	1171.2	1.26
6/3VX475	6	47.5	1207	48.61	1234.7	1.32
6/3VX500	6	50	1270	51.11	1298.2	1.38
6/3VX530	6	53	1346	54.11	1374.4	1.5
6/3VX560	6	56	1422	57.11	1450.6	1.56
6/3VX600	6	60	1524	61.11	1552.2	1.68
6/3VX630	6	63	1600	64.11	1628.4	1.74
6/3VX670	6	67	1702	68.11	1730	1.86
6/3VX710	6	71	1803	72.11	1831.6	1.98
6/3VX750	6	75	1905	76.11	1933.2	2.1
6/3VX800	6	80	2032	81.11	2060.2	2.22
6/3VX820	6	82	2083	83.11	2111	2.28
6/3VX850	6	85	2159	86.11	2187.2	2.34
6/3VX900	6	90	2286	91.11	2314.2	2.52
6/3VX950	6	95	2413	96.11	2441.2	2.64
6/3VX1000	6	100	2540	101.11	2568.2	2.76
6/3VX1060	6	106	2692	107.11	2720.6	2.94
6/3VX1120	6	112	2845	113.11	2873	3.12
6/3VX1180	6	118	2997	119.11	3025.4	3.3
6/3VX1250	6	125	3175	126.11	3203.2	3.48
6/3VX1320	6	132	3353	133.11	3381	3.66
6/3VX1400	6	140	3556	141.11	3584.2	3.9
7/3VX300	7	30	762	31.11	790.2	0.98
7/3VX315	7	31.5	800	32.61	828.3	1.05
7/3VX335	7	33.5	851	34.61	879.1	1.12
7/3VX355	7	35.5	902	36.61	929.9	1.12
7/3VX375	7	37.5	953	38.61	980.7	1.19
7/3VX400	7	40	1016	41.11	1044.2	1.33
7/3VX425	7	42.5	1080	43.61	1107.7	1.4
7/3VX450	7	45	1143	46.11	1171.2	1.47
7/3VX475	7	47.5	1207	48.61	1234.7	1.54
7/3VX500	7	50	1270	51.11	1298.2	1.61
7/3VX530	7	53	1346	54.11	1374.4	1.75
7/3VX560	7	56	1422	57.11	1450.6	1.82
7/3VX600	7	60	1524	61.11	1552.2	1.96
7/3VX630	7	63	1600	64.11	1628.4	2.03
7/3VX670	7	67	1702	68.11	1730	2.17
7/3VX710	7	71	1803	72.11	1831.6	2.31
7/3VX750	7	75	1905	76.11	1933.2	2.45
7/3VX800	7	80	2032	81.11	2060.2	2.59
7/3VX820	7	82	2083	83.11	2111	2.66
7/3VX850	7	85	2159	86.11	2187.2	2.73
7/3VX900	7	90	2286	91.11	2314.2	2.94

BANDED NARROW COGGED 3VX, 5VX V-BELT



3VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
7/3VX950	7	95	2413	96.11	2441.2	3.08
7/3VX1000	7	100	2540	101.11	2568.2	3.22
7/3VX1060	7	106	2692	107.11	2720.6	3.43
7/3VX1120	7	112	2845	113.11	2873	3.64
7/3VX1180	7	118	2997	119.11	3025.4	3.85
7/3VX1250	7	125	3175	126.11	3203.2	4.06
7/3VX1320	7	132	3353	133.11	3381	4.27
7/3VX1400	7	140	3556	141.11	3584.2	4.55
8/3VX300	8	30	762	31.11	790.2	1.12
8/3VX315	8	31.5	800	32.61	828.3	1.2
8/3VX335	8	33.5	851	34.61	879.1	1.28
8/3VX355	8	35.5	902	36.61	929.9	1.28
8/3VX375	8	37.5	953	38.61	980.7	1.36
8/3VX400	8	40	1016	41.11	1044.2	1.52
8/3VX425	8	42.5	1080	43.61	1107.7	1.6
8/3VX450	8	45	1143	46.11	1171.2	1.68
8/3VX475	8	47.5	1207	48.61	1234.7	1.76
8/3VX500	8	50	1270	51.11	1298.2	1.84
8/3VX530	8	53	1346	54.11	1374.4	2
8/3VX560	8	56	1422	57.11	1450.6	2.08
8/3VX600	8	60	1524	61.11	1552.2	2.24
8/3VX630	8	63	1600	64.11	1628.4	2.32
8/3VX670	8	67	1702	68.11	1730	2.48
8/3VX710	8	71	1803	72.11	1831.6	2.64
8/3VX750	8	75	1905	76.11	1933.2	2.8
8/3VX800	8	80	2032	81.11	2060.2	2.96
8/3VX820	8	82	2083	83.11	2111	3.04
8/3VX850	8	85	2159	86.11	2187.2	3.12
8/3VX900	8	90	2286	91.11	2314.2	3.36
8/3VX950	8	95	2413	96.11	2441.2	3.52
8/3VX1000	8	100	2540	101.11	2568.2	3.68
8/3VX1060	8	106	2692	107.11	2720.6	3.92
8/3VX1120	8	112	2845	113.11	2873	4.16
8/3VX1180	8	118	2997	119.11	3025.4	4.4
8/3VX1250	8	125	3175	126.11	3203.2	4.64
8/3VX1320	8	132	3353	133.11	3381	4.88
8/3VX1400	8	140	3556	141.11	3584.2	5.2
9/3VX300	9	30	762	31.11	790.2	1.26
9/3VX315	9	31.5	800	32.61	828.3	1.35
9/3VX335	9	33.5	851	34.61	879.1	1.44
9/3VX355	9	35.5	902	36.61	929.9	1.44
9/3VX375	9	37.5	953	38.61	980.7	1.53
9/3VX400	9	40	1016	41.11	1044.2	1.71
9/3VX425	9	42.5	1080	43.61	1107.7	1.8
9/3VX450	9	45	1143	46.11	1171.2	1.89
9/3VX475	9	47.5	1207	48.61	1234.7	1.98
9/3VX500	9	50	1270	51.11	1298.2	2.07

3VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
9/3VX530	9	53	1346	54.11	1374.4	2.25
9/3VX560	9	56	1422	57.11	1450.6	2.34
9/3VX600	9	60	1524	61.11	1552.2	2.52
9/3VX630	9	63	1600	64.11	1628.4	2.61
9/3VX670	9	67	1702	68.11	1730	2.79
9/3VX710	9	71	1803	72.11	1831.6	2.97
9/3VX750	9	75	1905	76.11	1933.2	3.15
9/3VX800	9	80	2032	81.11	2060.2	3.33
9/3VX820	9	82	2083	83.11	2111	3.42
9/3VX850	9	85	2159	86.11	2187.2	3.51
9/3VX900	9	90	2286	91.11	2314.2	3.78
9/3VX950	9	95	2413	96.11	2441.2	3.96
9/3VX1000	9	100	2540	101.11	2568.2	4.14
9/3VX1060	9	106	2692	107.11	2720.6	4.41
9/3VX1120	9	112	2845	113.11	2873	4.68
9/3VX1180	9	118	2997	119.11	3025.4	4.95
9/3VX1250	9	125	3175	126.11	3203.2	5.22
9/3VX1320	9	132	3353	133.11	3381	5.49
9/3VX1400	9	140	3556	141.11	3584.2	5.85
10/3VX300	10	30	762	31.11	790.2	1.4
10/3VX315	10	31.5	800	32.61	828.3	1.5
10/3VX335	10	33.5	851	34.61	879.1	1.6
10/3VX355	10	35.5	902	36.61	929.9	1.6
10/3VX375	10	37.5	953	38.61	980.7	1.7
10/3VX400	10	40	1016	41.11	1044.2	1.9
10/3VX425	10	42.5	1080	43.61	1107.7	2
10/3VX450	10	45	1143	46.11	1171.2	2.1
10/3VX475	10	47.5	1207	48.61	1234.7	2.2
10/3VX500	10	50	1270	51.11	1298.2	2.3
10/3VX530	10	53	1346	54.11	1374.4	2.5
10/3VX560	10	56	1422	57.11	1450.6	2.6
10/3VX600	10	60	1524	61.11	1552.2	2.8
10/3VX630	10	63	1600	64.11	1628.4	2.9
10/3VX670	10	67	1702	68.11	1730	3.1
10/3VX710	10	71	1803	72.11	1831.6	3.3
10/3VX750	10	75	1905	76.11	1933.2	3.5
10/3VX800	10	80	2032	81.11	2060.2	3.7
10/3VX820	10	82	2083	83.11	2111	3.8
10/3VX850	10	85	2159	86.11	2187.2	3.9
10/3VX900	10	90	2286	91.11	2314.2	4.2
10/3VX950	10	95	2413	96.11	2441.2	4.4
10/3VX1000	10	100	2540	101.11	2568.2	4.6
10/3VX1060	10	106	2692	107.11	2720.6	4.9
10/3VX1120	10	112	2845	113.11	2873	5.2
10/3VX1180	10	118	2997	119.11	3025.4	5.5
10/3VX1250	10	125	3175	126.11	3203.2	5.8
10/3VX1320	10	132	3353	133.11	3381	6.1

BANDED NARROW COGGED 3VX, 5VX V-BELT



3VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
10/3VX1400	10	140	3556	141.11	3584.2	6.5
11/3VX300	11	30	762	31.11	790.2	1.54
11/3VX315	11	31.5	800	32.61	828.3	1.65
11/3VX335	11	33.5	851	34.61	879.1	1.76
11/3VX355	11	35.5	902	36.61	929.9	1.76
11/3VX375	11	37.5	953	38.61	980.7	1.87
11/3VX400	11	40	1016	41.11	1044.2	2.09
11/3VX425	11	42.5	1080	43.61	1107.7	2.2
11/3VX450	11	45	1143	46.11	1171.2	2.31
11/3VX475	11	47.5	1207	48.61	1234.7	2.42
11/3VX500	11	50	1270	51.11	1298.2	2.53
11/3VX530	11	53	1346	54.11	1374.4	2.75
11/3VX560	11	56	1422	57.11	1450.6	2.86
11/3VX600	11	60	1524	61.11	1552.2	3.08
11/3VX630	11	63	1600	64.11	1628.4	3.19
11/3VX670	11	67	1702	68.11	1730	3.41
11/3VX710	11	71	1803	72.11	1831.6	3.63
11/3VX750	11	75	1905	76.11	1933.2	3.85
11/3VX800	11	80	2032	81.11	2060.2	4.07
11/3VX820	11	82	2083	83.11	2111	4.18
11/3VX850	11	85	2159	86.11	2187.2	4.29
11/3VX900	11	90	2286	91.11	2314.2	4.62
11/3VX950	11	95	2413	96.11	2441.2	4.84
11/3VX1000	11	100	2540	101.11	2568.2	5.06
11/3VX1060	11	106	2692	107.11	2720.6	5.39
11/3VX1120	11	112	2845	113.11	2873	5.72
11/3VX1180	11	118	2997	119.11	3025.4	6.05
11/3VX1250	11	125	3175	126.11	3203.2	6.38
11/3VX1320	11	132	3353	133.11	3381	6.71
11/3VX1400	11	140	3556	141.11	3584.2	7.15
12/3VX300	12	30	762	31.11	790.2	1.68
12/3VX315	12	31.5	800	32.61	828.3	1.8
12/3VX335	12	33.5	851	34.61	879.1	1.92
12/3VX355	12	35.5	902	36.61	929.9	1.92
12/3VX375	12	37.5	953	38.61	980.7	2.04
12/3VX400	12	40	1016	41.11	1044.2	2.28
12/3VX425	12	42.5	1080	43.61	1107.7	2.4
12/3VX450	12	45	1143	46.11	1171.2	2.52
12/3VX475	12	47.5	1207	48.61	1234.7	2.64
12/3VX500	12	50	1270	51.11	1298.2	2.76
12/3VX530	12	53	1346	54.11	1374.4	3
12/3VX560	12	56	1422	57.11	1450.6	3.12
12/3VX600	12	60	1524	61.11	1552.2	3.36
12/3VX630	12	63	1600	64.11	1628.4	3.48
12/3VX670	12	67	1702	68.11	1730	3.72
12/3VX710	12	71	1803	72.11	1831.6	3.96
12/3VX750	12	75	1905	76.11	1933.2	4.2

3VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
12/3VX800	12	80	2032	81.11	2060.2	4.44
12/3VX820	12	82	2083	83.11	2111	4.56
12/3VX850	12	85	2159	86.11	2187.2	4.68
12/3VX900	12	90	2286	91.11	2314.2	5.04
12/3VX950	12	95	2413	96.11	2441.2	5.28
12/3VX1000	12	100	2540	101.11	2568.2	5.52
12/3VX1060	12	106	2692	107.11	2720.6	5.88
12/3VX750	12	75	1905	76.11	1933.2	4.2
12/3VX800	12	80	2032	81.11	2060.2	4.44
12/3VX820	12	82	2083	83.11	2111	4.56
12/3VX850	12	85	2159	86.11	2187.2	4.68
12/3VX900	12	90	2286	91.11	2314.2	5.04
12/3VX950	12	95	2413	96.11	2441.2	5.28
12/3VX1000	12	100	2540	101.11	2568.2	5.52
12/3VX1060	12	106	2692	107.11	2720.6	5.88
12/3VX1120	12	112	2845	113.11	2873	6.24
12/3VX1180	12	118	2997	119.11	3025.4	6.6
12/3VX1250	12	125	3175	126.11	3203.2	6.96
12/3VX1320	12	132	3353	133.11	3381	7.32
12/3VX1400	12	140	3556	141.11	3584.2	7.8
13/3VX300	13	30	762	31.11	790.2	1.82
13/3VX315	13	31.5	800	32.61	828.3	1.95
13/3VX335	13	33.5	851	34.61	879.1	2.08
13/3VX355	13	35.5	902	36.61	929.9	2.08
13/3VX375	13	37.5	953	38.61	980.7	2.21
13/3VX400	13	40	1016	41.11	1044.2	2.47
13/3VX425	13	42.5	1080	43.61	1107.7	2.6
13/3VX450	13	45	1143	46.11	1171.2	2.73
13/3VX475	13	47.5	1207	48.61	1234.7	2.86
13/3VX500	13	50	1270	51.11	1298.2	2.99
13/3VX530	13	53	1346	54.11	1374.4	3.25
13/3VX560	13	56	1422	57.11	1450.6	3.38
13/3VX600	13	60	1524	61.11	1552.2	3.64
13/3VX630	13	63	1600	64.11	1628.4	3.77
13/3VX670	13	67	1702	68.11	1730	4.03
13/3VX710	13	71	1803	72.11	1831.6	4.29
13/3VX750	13	75	1905	76.11	1933.2	4.55
13/3VX800	13	80	2032	81.11	2060.2	4.81
13/3VX820	13	82	2083	83.11	2111	4.94
13/3VX850	13	85	2159	86.11	2187.2	5.07
13/3VX900	13	90	2286	91.11	2314.2	5.46
13/3VX950	13	95	2413	96.11	2441.2	5.72
13/3VX1000	13	100	2540	101.11	2568.2	5.98
13/3VX1060	13	106	2692	107.11	2720.6	6.37
13/3VX1120	13	112	2845	113.11	2873	6.76
13/3VX1180	13	118	2997	119.11	3025.4	7.15
13/3VX1250	13	125	3175	126.11	3203.2	7.54

BANDED NARROW COGGED 3VX, 5VX V-BELT



3VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
13/3VX1320	13	132	3353	133.11	3381	7.93
13/3VX1400	13	140	3556	141.11	3584.2	8.45
14/3VX300	14	30	762	31.11	790.2	1.96
14/3VX315	14	31.5	800	32.61	828.3	2.1
14/3VX335	14	33.5	851	34.61	879.1	2.24
14/3VX355	14	35.5	902	36.61	929.9	2.24
14/3VX375	14	37.5	953	38.61	980.7	2.38
14/3VX400	14	40	1016	41.11	1044.2	2.66
14/3VX425	14	42.5	1080	43.61	1107.7	2.8
14/3VX450	14	45	1143	46.11	1171.2	2.94
14/3VX475	14	47.5	1207	48.61	1234.7	3.08
14/3VX500	14	50	1270	51.11	1298.2	3.22
14/3VX530	14	53	1346	54.11	1374.4	3.5
14/3VX560	14	56	1422	57.11	1450.6	3.64
14/3VX600	14	60	1524	61.11	1552.2	3.92
14/3VX630	14	63	1600	64.11	1628.4	4.06
14/3VX670	14	67	1702	68.11	1730	4.34
14/3VX710	14	71	1803	72.11	1831.6	4.62
14/3VX750	14	75	1905	76.11	1933.2	4.9
14/3VX800	14	80	2032	81.11	2060.2	5.18
14/3VX820	14	82	2083	83.11	2111	5.32
14/3VX850	14	85	2159	86.11	2187.2	5.46
14/3VX900	14	90	2286	91.11	2314.2	5.88
14/3VX950	14	95	2413	96.11	2441.2	6.16
14/3VX1000	14	100	2540	101.11	2568.2	6.44
14/3VX1060	14	106	2692	107.11	2720.6	6.86
14/3VX1120	14	112	2845	113.11	2873	7.28
14/3VX1180	14	118	2997	119.11	3025.4	7.7
14/3VX1250	14	125	3175	126.11	3203.2	8.12
14/3VX1320	14	132	3353	133.11	3381	8.54
14/3VX1400	14	140	3556	141.11	3584.2	9.1
15/3VX300	15	30	762	31.11	790.2	2.1
15/3VX315	15	31.5	800	32.61	828.3	2.25
15/3VX335	15	33.5	851	34.61	879.1	2.4
15/3VX355	15	35.5	902	36.61	929.9	2.4
15/3VX375	15	37.5	953	38.61	980.7	2.55
15/3VX400	15	40	1016	41.11	1044.2	2.85
15/3VX425	15	42.5	1080	43.61	1107.7	3
15/3VX450	15	45	1143	46.11	1171.2	3.15
15/3VX475	15	47.5	1207	48.61	1234.7	3.3
15/3VX500	15	50	1270	51.11	1298.2	3.45
15/3VX530	15	53	1346	54.11	1374.4	3.75
15/3VX560	15	56	1422	57.11	1450.6	3.9
15/3VX600	15	60	1524	61.11	1552.2	4.2
15/3VX630	15	63	1600	64.11	1628.4	4.35
15/3VX670	15	67	1702	68.11	1730	4.65
15/3VX710	15	71	1803	72.11	1831.6	4.95

3VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
15/3VX750	15	75	1905	76.11	1933.2	5.25
15/3VX800	15	80	2032	81.11	2060.2	5.55
15/3VX820	15	82	2083	83.11	2111	5.7
15/3VX850	15	85	2159	86.11	2187.2	5.85
15/3VX900	15	90	2286	91.11	2314.2	6.3
15/3VX950	15	95	2413	96.11	2441.2	6.6
15/3VX1000	15	100	2540	101.11	2568.2	6.9
15/3VX1060	15	106	2692	107.11	2720.6	7.35
15/3VX1120	15	112	2845	113.11	2873	7.8
15/3VX1180	15	118	2997	119.11	3025.4	8.25
15/3VX1250	15	125	3175	126.11	3203.2	8.7
15/3VX1320	15	132	3353	133.11	3381	9.15
15/3VX1400	15	140	3556	141.11	3584.2	9.75
16/3VX300	16	30	762	31.11	790.2	2.24
16/3VX315	16	31.5	800	32.61	828.3	2.4
16/3VX335	16	33.5	851	34.61	879.1	2.56
16/3VX355	16	35.5	902	36.61	929.9	2.56
16/3VX375	16	37.5	953	38.61	980.7	2.72
16/3VX400	16	40	1016	41.11	1044.2	3.04
16/3VX425	16	42.5	1080	43.61	1107.7	3.2
16/3VX450	16	45	1143	46.11	1171.2	3.36
16/3VX475	16	47.5	1207	48.61	1234.7	3.52
16/3VX500	16	50	1270	51.11	1298.2	3.68
16/3VX530	16	53	1346	54.11	1374.4	4
16/3VX560	16	56	1422	57.11	1450.6	4.16
16/3VX600	16	60	1524	61.11	1552.2	4.48
16/3VX630	16	63	1600	64.11	1628.4	4.64
16/3VX670	16	67	1702	68.11	1730	4.96
16/3VX710	16	71	1803	72.11	1831.6	5.28
16/3VX750	16	75	1905	76.11	1933.2	5.6
16/3VX800	16	80	2032	81.11	2060.2	5.92
16/3VX820	16	82	2083	83.11	2111	6.08
16/3VX850	16	85	2159	86.11	2187.2	6.24
16/3VX900	16	90	2286	91.11	2314.2	6.72
16/3VX950	16	95	2413	96.11	2441.2	7.04
16/3VX1000	16	100	2540	101.11	2568.2	7.36
16/3VX1060	16	106	2692	107.11	2720.6	7.84
16/3VX1120	16	112	2845	113.11	2873	8.32
16/3VX1180	16	118	2997	119.11	3025.4	8.8
16/3VX1250	16	125	3175	126.11	3203.2	9.28
16/3VX1320	16	132	3353	133.11	3381	9.76
16/3VX1400	16	140	3556	141.11	3584.2	10.4
17/3VX300	17	30	762	31.11	790.2	2.38
17/3VX315	17	31.5	800	32.61	828.3	2.55
17/3VX335	17	33.5	851	34.61	879.1	2.72
17/3VX355	17	35.5	902	36.61	929.9	2.72
17/3VX375	17	37.5	953	38.61	980.7	2.89

BANDED NARROW COGGED 3VX, 5VX V-BELT



3VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
17/3VX400	17	40	1016	41.11	1044.2	3.23
17/3VX425	17	42.5	1080	43.61	1107.7	3.4
17/3VX450	17	45	1143	46.11	1171.2	3.57
17/3VX475	17	47.5	1207	48.61	1234.7	3.74
17/3VX500	17	50	1270	51.11	1298.2	3.91
17/3VX530	17	53	1346	54.11	1374.4	4.25
17/3VX560	17	56	1422	57.11	1450.6	4.42
17/3VX600	17	60	1524	61.11	1552.2	4.76
17/3VX630	17	63	1600	64.11	1628.4	4.93
17/3VX670	17	67	1702	68.11	1730	5.27
17/3VX475	17	47.5	1207	48.61	1234.7	3.74
17/3VX500	17	50	1270	51.11	1298.2	3.91
17/3VX530	17	53	1346	54.11	1374.4	4.25
17/3VX560	17	56	1422	57.11	1450.6	4.42
17/3VX600	17	60	1524	61.11	1552.2	4.76
17/3VX630	17	63	1600	64.11	1628.4	4.93
17/3VX670	17	67	1702	68.11	1730	5.27
17/3VX710	17	71	1803	72.11	1831.6	5.61
17/3VX750	17	75	1905	76.11	1933.2	5.95
17/3VX800	17	80	2032	81.11	2060.2	6.29
17/3VX820	17	82	2083	83.11	2111	6.46
17/3VX850	17	85	2159	86.11	2187.2	6.63
17/3VX900	17	90	2286	91.11	2314.2	7.14
17/3VX950	17	95	2413	96.11	2441.2	7.48
17/3VX1000	17	100	2540	101.11	2568.2	7.82
17/3VX1060	17	106	2692	107.11	2720.6	8.33
17/3VX1120	17	112	2845	113.11	2873	8.84
17/3VX1180	17	118	2997	119.11	3025.4	9.35
17/3VX1250	17	125	3175	126.11	3203.2	9.86
17/3VX1320	17	132	3353	133.11	3381	10.37
17/3VX1400	17	140	3556	141.11	3584.2	11.05
18/3VX300	18	30	762	31.11	790.2	2.52
18/3VX315	18	31.5	800	32.61	828.3	2.7
18/3VX335	18	33.5	851	34.61	879.1	2.88
18/3VX355	18	35.5	902	36.61	929.9	2.88
18/3VX375	18	37.5	953	38.61	980.7	3.06
18/3VX400	18	40	1016	41.11	1044.2	3.42
18/3VX425	18	42.5	1080	43.61	1107.7	3.6
18/3VX450	18	45	1143	46.11	1171.2	3.78
18/3VX475	18	47.5	1207	48.61	1234.7	3.96
18/3VX500	18	50	1270	51.11	1298.2	4.14
18/3VX530	18	53	1346	54.11	1374.4	4.5
18/3VX560	18	56	1422	57.11	1450.6	4.68
18/3VX600	18	60	1524	61.11	1552.2	5.04
18/3VX630	18	63	1600	64.11	1628.4	5.22
18/3VX670	18	67	1702	68.11	1730	5.58
18/3VX710	18	71	1803	72.11	1831.6	5.94

3VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
18/3VX750	18	75	1905	76.11	1933.2	6.3
18/3VX800	18	80	2032	81.11	2060.2	6.66
18/3VX820	18	82	2083	83.11	2111	6.84
18/3VX850	18	85	2159	86.11	2187.2	7.02
18/3VX900	18	90	2286	91.11	2314.2	7.56
18/3VX950	18	95	2413	96.11	2441.2	7.92
18/3VX1000	18	100	2540	101.11	2568.2	8.28
18/3VX1060	18	106	2692	107.11	2720.6	8.82
18/3VX1120	18	112	2845	113.11	2873	9.36
18/3VX1180	18	118	2997	119.11	3025.4	9.9
18/3VX1250	18	125	3175	126.11	3203.2	10.44
18/3VX1320	18	132	3353	133.11	3381	10.98
18/3VX1400	18	140	3556	141.11	3584.2	11.7
19/3VX300	19	30	762	31.11	790.2	2.66
19/3VX315	19	31.5	800	32.61	828.3	2.85
19/3VX335	19	33.5	851	34.61	879.1	3.04
19/3VX355	19	35.5	902	36.61	929.9	3.04
19/3VX375	19	37.5	953	38.61	980.7	3.23
19/3VX400	19	40	1016	41.11	1044.2	3.61
19/3VX425	19	42.5	1080	43.61	1107.7	3.8
19/3VX450	19	45	1143	46.11	1171.2	3.99
19/3VX475	19	47.5	1207	48.61	1234.7	4.18
19/3VX500	19	50	1270	51.11	1298.2	4.37
19/3VX530	19	53	1346	54.11	1374.4	4.75
19/3VX560	19	56	1422	57.11	1450.6	4.94
19/3VX600	19	60	1524	61.11	1552.2	5.32
19/3VX630	19	63	1600	64.11	1628.4	5.51
19/3VX670	19	67	1702	68.11	1730	5.89
19/3VX710	19	71	1803	72.11	1831.6	6.27
19/3VX750	19	75	1905	76.11	1933.2	6.65
19/3VX800	19	80	2032	81.11	2060.2	7.03
19/3VX820	19	82	2083	83.11	2111	7.22
19/3VX850	19	85	2159	86.11	2187.2	7.41
19/3VX900	19	90	2286	91.11	2314.2	7.98
19/3VX950	19	95	2413	96.11	2441.2	8.36
19/3VX1000	19	100	2540	101.11	2568.2	8.74
19/3VX1060	19	106	2692	107.11	2720.6	9.31
19/3VX1120	19	112	2845	113.11	2873	9.88
19/3VX1180	19	118	2997	119.11	3025.4	10.45
19/3VX1250	19	125	3175	126.11	3203.2	11.02
19/3VX1320	19	132	3353	133.11	3381	11.59
19/3VX1400	19	140	3556	141.11	3584.2	12.35
20/3VX300	20	30	762	31.11	790.2	2.8
20/3VX315	20	31.5	800	32.61	828.3	3
20/3VX335	20	33.5	851	34.61	879.1	3.2
20/3VX355	20	35.5	902	36.61	929.9	3.2
20/3VX375	20	37.5	953	38.61	980.7	3.4

BANDED NARROW COGGED 3VX, 5VX V-BELT



3VX continue


Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
20/3VX400	20	40	1016	41.11	1044.2	3.8
20/3VX425	20	42.5	1080	43.61	1107.7	4
20/3VX450	20	45	1143	46.11	1171.2	4.2
20/3VX475	20	47.5	1207	48.61	1234.7	4.4
20/3VX500	20	50	1270	51.11	1298.2	4.6
20/3VX530	20	53	1346	54.11	1374.4	5
20/3VX560	20	56	1422	57.11	1450.6	5.2
20/3VX600	20	60	1524	61.11	1552.2	5.6
20/3VX630	20	63	1600	64.11	1628.4	5.8
20/3VX670	20	67	1702	68.11	1730	6.2
20/3VX710	20	71	1803	72.11	1831.6	6.6
20/3VX750	20	75	1905	76.11	1933.2	7
20/3VX800	20	80	2032	81.11	2060.2	7.4
20/3VX820	20	82	2083	83.11	2111	7.6
20/3VX850	20	85	2159	86.11	2187.2	7.8
20/3VX900	20	90	2286	91.11	2314.2	8.4
20/3VX950	20	95	2413	96.11	2441.2	8.8
20/3VX1000	20	100	2540	101.11	2568.2	9.2
20/3VX1060	20	106	2692	107.11	2720.6	9.8
20/3VX1120	20	112	2845	113.11	2873	10.4
20/3VX1180	20	118	2997	119.11	3025.4	11
20/3VX1250	20	125	3175	126.11	3203.2	11.6
20/3VX1320	20	132	3353	133.11	3381	12.2
20/3VX1400	20	140	3556	141.11	3584.2	13
21/3VX300	21	30	762	31.11	790.2	2.94
21/3VX315	21	31.5	800	32.61	828.3	3.15
21/3VX335	21	33.5	851	34.61	879.1	3.36
21/3VX355	21	35.5	902	36.61	929.9	3.36
21/3VX375	21	37.5	953	38.61	980.7	3.57
21/3VX400	21	40	1016	41.11	1044.2	3.99
21/3VX425	21	42.5	1080	43.61	1107.7	4.2
21/3VX450	21	45	1143	46.11	1171.2	4.41
21/3VX475	21	47.5	1207	48.61	1234.7	4.62
21/3VX500	21	50	1270	51.11	1298.2	4.83
21/3VX530	21	53	1346	54.11	1374.4	5.25
21/3VX560	21	56	1422	57.11	1450.6	5.46
21/3VX600	21	60	1524	61.11	1552.2	5.88
21/3VX630	21	63	1600	64.11	1628.4	6.09
21/3VX670	21	67	1702	68.11	1730	6.51
21/3VX710	21	71	1803	72.11	1831.6	6.93
21/3VX750	21	75	1905	76.11	1933.2	7.35
21/3VX800	21	80	2032	81.11	2060.2	7.77
21/3VX820	21	82	2083	83.11	2111	7.98
21/3VX850	21	85	2159	86.11	2187.2	8.19
21/3VX900	21	90	2286	91.11	2314.2	8.82
21/3VX950	21	95	2413	96.11	2441.2	9.24
21/3VX1000	21	100	2540	101.11	2568.2	9.66

3VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
21/3VX1060	21	106	2692	107.11	2720.6	10.29
21/3VX1120	21	112	2845	113.11	2873	10.92
21/3VX1180	21	118	2997	119.11	3025.4	11.55
21/3VX1250	21	125	3175	126.11	3203.2	12.18
21/3VX1320	21	132	3353	133.11	3381	12.81
21/3VX1400	21	140	3556	141.11	3584.2	13.65
22/3VX300	22	30	762	31.11	790.2	3.08
22/3VX315	22	31.5	800	32.61	828.3	3.3
22/3VX335	22	33.5	851	34.61	879.1	3.52
22/3VX355	22	35.5	902	36.61	929.9	3.52
22/3VX375	22	37.5	953	38.61	980.7	3.74
22/3VX400	22	40	1016	41.11	1044.2	4.18
22/3VX425	22	42.5	1080	43.61	1107.7	4.4
22/3VX450	22	45	1143	46.11	1171.2	4.62
22/3VX475	22	47.5	1207	48.61	1234.7	4.84
22/3VX500	22	50	1270	51.11	1298.2	5.06
22/3VX530	22	53	1346	54.11	1374.4	5.5
22/3VX560	22	56	1422	57.11	1450.6	5.72
22/3VX600	22	60	1524	61.11	1552.2	6.16
22/3VX630	22	63	1600	64.11	1628.4	6.38
22/3VX670	22	67	1702	68.11	1730	6.82
22/3VX710	22	71	1803	72.11	1831.6	7.26
22/3VX750	22	75	1905	76.11	1933.2	7.7
22/3VX800	22	80	2032	81.11	2060.2	8.14
22/3VX820	22	82	2083	83.11	2111	8.36
22/3VX850	22	85	2159	86.11	2187.2	8.58
22/3VX900	22	90	2286	91.11	2314.2	9.24
22/3VX950	22	95	2413	96.11	2441.2	9.68
22/3VX1000	22	100	2540	101.11	2568.2	10.12
22/3VX1060	22	106	2692	107.11	2720.6	10.78
22/3VX1120	22	112	2845	113.11	2873	11.44
22/3VX1180	22	118	2997	119.11	3025.4	12.1
22/3VX1250	22	125	3175	126.11	3203.2	12.76
22/3VX1320	22	132	3353	133.11	3381	13.42
22/3VX1400	22	140	3556	141.11	3584.2	14.3

*Additional Length May Be Available.
Contact us for more information.

BANDED NARROW COGGED 3VX, 5VX V-BELT



BELT PART NUMBER NOMENCLATURE

Belt No: **3/5VX500**
3/ - Number of Ribs
5V - Profile
X - Molded Cogged
500 - Outside Circumference
(Inches in tenths: 35.0")

5VX						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
2/5VX500	2	50	1270	51.36	1304.5	1.26
2/5VX530	2	53	1346	54.36	1380.7	1.34
2/5VX560	2	56	1422	57.36	1456.9	1.42
2/5VX600	2	60	1524	61.36	1558.5	1.52
2/5VX630	2	63	1600	64.36	1634.7	1.58
2/5VX670	2	67	1702	68.36	1736.3	1.68
2/5VX710	2	71	1803	72.36	1837.9	1.8
2/5VX750	2	75	1905	76.36	1939.5	1.9
2/5VX800	2	80	2032	81.36	2066.5	2.02
2/5VX850	2	85	2159	86.36	2193.5	2.14
2/5VX900	2	90	2286	91.36	2320.5	2.26
2/5VX950	2	95	2413	96.36	2447.5	2.4
2/5VX1000	2	100	2540	101.36	2574.5	2.52
2/5VX1060	2	106	2692	107.36	2726.9	2.68
2/5VX1120	2	112	2845	113.36	2879.3	2.82
2/5VX1180	2	118	2997	119.36	3031.7	2.98
2/5VX1250	2	125	3175	126.36	3209.5	3.16
2/5VX1320	2	132	3353	133.36	3387.3	3.32
2/5VX1400	2	140	3556	141.36	3590.5	3.54
2/5VX1500	2	150	3810	151.36	3844.5	3.78
2/5VX1600	2	160	4064	161.36	4098.5	4.04
2/5VX1700	2	170	4318	171.36	4352.5	4.28
2/5VX1800	2	180	4572	181.36	4606.5	4.54
2/5VX1900	2	190	4826	191.36	4860.5	4.8
2/5VX2000	2	200	5080	201.36	5114.5	5.04
3/5VX500	3	50	1270	51.36	1304.5	1.89
3/5VX530	3	53	1346	54.36	1380.7	2.01
3/5VX560	3	56	1422	57.36	1456.9	2.13
3/5VX600	3	60	1524	61.36	1558.5	2.28
3/5VX630	3	63	1600	64.36	1634.7	2.37
3/5VX670	3	67	1702	68.36	1736.3	2.52
3/5VX710	3	71	1803	72.36	1837.9	2.7
3/5VX750	3	75	1905	76.36	1939.5	2.85
3/5VX530	3	53	1346	54.36	1380.7	2.01
3/5VX560	3	56	1422	57.36	1456.9	2.13
3/5VX600	3	60	1524	61.36	1558.5	2.28
3/5VX630	3	63	1600	64.36	1634.7	2.37
3/5VX670	3	67	1702	68.36	1736.3	2.52
3/5VX710	3	71	1803	72.36	1837.9	2.7
3/5VX750	3	75	1905	76.36	1939.5	2.85

5VX						
Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
3/5VX800	3	80	2032	81.36	2066.5	3.03
3/5VX850	3	85	2159	86.36	2193.5	3.21
3/5VX900	3	90	2286	91.36	2320.5	3.39
3/5VX950	3	95	2413	96.36	2447.5	3.6
3/5VX1000	3	100	2540	101.36	2574.5	3.78
3/5VX1060	3	106	2692	107.36	2726.9	4.02
3/5VX1120	3	112	2845	113.36	2879.3	4.23
3/5VX1180	3	118	2997	119.36	3031.7	4.47
3/5VX1250	3	125	3175	126.36	3209.5	4.74
3/5VX1320	3	132	3353	133.36	3387.3	4.98
3/5VX1400	3	140	3556	141.36	3590.5	5.31
3/5VX1500	3	150	3810	151.36	3844.5	5.67
3/5VX1600	3	160	4064	161.36	4098.5	6.06
3/5VX1700	3	170	4318	171.36	4352.5	6.42
3/5VX1800	3	180	4572	181.36	4606.5	6.81
3/5VX1900	3	190	4826	191.36	4860.5	7.2
3/5VX2000	3	200	5080	201.36	5114.5	7.56
4/5VX500	4	50	1270	51.36	1304.5	2.52
4/5VX530	4	53	1346	54.36	1380.7	2.68
4/5VX560	4	56	1422	57.36	1456.9	2.84
4/5VX600	4	60	1524	61.36	1558.5	3.04
4/5VX630	4	63	1600	64.36	1634.7	3.16
4/5VX670	4	67	1702	68.36	1736.3	3.36
4/5VX710	4	71	1803	72.36	1837.9	3.6
4/5VX750	4	75	1905	76.36	1939.5	3.8
4/5VX800	4	80	2032	81.36	2066.5	4.04
4/5VX850	4	85	2159	86.36	2193.5	4.28
4/5VX900	4	90	2286	91.36	2320.5	4.52
4/5VX950	4	95	2413	96.36	2447.5	4.8
4/5VX1000	4	100	2540	101.36	2574.5	5.04
4/5VX1060	4	106	2692	107.36	2726.9	5.36
4/5VX1120	4	112	2845	113.36	2879.3	5.64
4/5VX1180	4	118	2997	119.36	3031.7	5.96
4/5VX1250	4	125	3175	126.36	3209.5	6.32
4/5VX1320	4	132	3353	133.36	3387.3	6.64
4/5VX1400	4	140	3556	141.36	3590.5	7.08
4/5VX1500	4	150	3810	151.36	3844.5	7.56
4/5VX1600	4	160	4064	161.36	4098.5	8.08
4/5VX1700	4	170	4318	171.36	4352.5	8.56
4/5VX1800	4	180	4572	181.36	4606.5	9.08
4/5VX1900	4	190	4826	191.36	4860.5	9.6
4/5VX2000	4	200	5080	201.36	5114.5	10.08
5/5VX500	5	50	1270	51.36	1304.5	3.15
5/5VX530	5	53	1346	54.36	1380.7	3.35
5/5VX560	5	56	1422	57.36	1456.9	3.55

BANDED NARROW COGGED 3VX, 5VX V-BELT



5VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
5/5VX600	5	60	1524	61.36	1558.5	3.8
5/5VX630	5	63	1600	64.36	1634.7	3.95
5/5VX670	5	67	1702	68.36	1736.3	4.2
5/5VX710	5	71	1803	72.36	1837.9	4.5
5/5VX750	5	75	1905	76.36	1939.5	4.75
5/5VX800	5	80	2032	81.36	2066.5	5.05
5/5VX850	5	85	2159	86.36	2193.5	5.35
5/5VX900	5	90	2286	91.36	2320.5	5.65
5/5VX950	5	95	2413	96.36	2447.5	6
5/5VX1000	5	100	2540	101.36	2574.5	6.3
5/5VX1060	5	106	2692	107.36	2726.9	6.7
5/5VX1120	5	112	2845	113.36	2879.3	7.05
5/5VX1180	5	118	2997	119.36	3031.7	7.45
5/5VX1250	5	125	3175	126.36	3209.5	7.9
5/5VX1320	5	132	3353	133.36	3387.3	8.3
5/5VX1400	5	140	3556	141.36	3590.5	8.85
5/5VX1500	5	150	3810	151.36	3844.5	9.45
5/5VX1600	5	160	4064	161.36	4098.5	10.1
5/5VX1700	5	170	4318	171.36	4352.5	10.7
5/5VX1800	5	180	4572	181.36	4606.5	11.35
5/5VX1900	5	190	4826	191.36	4860.5	12
5/5VX2000	5	200	5080	201.36	5114.5	12.6
6/5VX500	6	50	1270	51.36	1304.5	3.78
6/5VX530	6	53	1346	54.36	1380.7	4.02
6/5VX560	6	56	1422	57.36	1456.9	4.26
6/5VX600	6	60	1524	61.36	1558.5	4.56
6/5VX630	6	63	1600	64.36	1634.7	4.74
6/5VX670	6	67	1702	68.36	1736.3	5.04
6/5VX710	6	71	1803	72.36	1837.9	5.4
6/5VX750	6	75	1905	76.36	1939.5	5.7
6/5VX800	6	80	2032	81.36	2066.5	6.06
6/5VX850	6	85	2159	86.36	2193.5	6.42
6/5VX900	6	90	2286	91.36	2320.5	6.78
6/5VX950	6	95	2413	96.36	2447.5	7.2
6/5VX1000	6	100	2540	101.36	2574.5	7.56
6/5VX1060	6	106	2692	107.36	2726.9	8.04
6/5VX1120	6	112	2845	113.36	2879.3	8.46
6/5VX1180	6	118	2997	119.36	3031.7	8.94
6/5VX800	6	80	2032	81.36	2066.5	6.06
6/5VX850	6	85	2159	86.36	2193.5	6.42
6/5VX900	6	90	2286	91.36	2320.5	6.78
6/5VX950	6	95	2413	96.36	2447.5	7.2
6/5VX1000	6	100	2540	101.36	2574.5	7.56
6/5VX1060	6	106	2692	107.36	2726.9	8.04
6/5VX1120	6	112	2845	113.36	2879.3	8.46
6/5VX1180	6	118	2997	119.36	3031.7	8.94
6/5VX1250	6	125	3175	126.36	3209.5	9.48

5VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
6/5VX1320	6	132	3353	133.36	3387.3	9.96
6/5VX1400	6	140	3556	141.36	3590.5	10.62
6/5VX1500	6	150	3810	151.36	3844.5	11.34
6/5VX1600	6	160	4064	161.36	4098.5	12.12
6/5VX1700	6	170	4318	171.36	4352.5	12.84
6/5VX1800	6	180	4572	181.36	4606.5	13.62
6/5VX1900	6	190	4826	191.36	4860.5	14.4
6/5VX2000	6	200	5080	201.36	5114.5	15.12
7/5VX500	7	50	1270	51.36	1304.5	4.41
7/5VX530	7	53	1346	54.36	1380.7	4.69
7/5VX560	7	56	1422	57.36	1456.9	4.97
7/5VX600	7	60	1524	61.36	1558.5	5.32
7/5VX630	7	63	1600	64.36	1634.7	5.53
7/5VX670	7	67	1702	68.36	1736.3	5.88
7/5VX710	7	71	1803	72.36	1837.9	6.3
7/5VX750	7	75	1905	76.36	1939.5	6.65
7/5VX800	7	80	2032	81.36	2066.5	7.07
7/5VX850	7	85	2159	86.36	2193.5	7.49
7/5VX900	7	90	2286	91.36	2320.5	7.91
7/5VX950	7	95	2413	96.36	2447.5	8.4
7/5VX1000	7	100	2540	101.36	2574.5	8.82
7/5VX1060	7	106	2692	107.36	2726.9	9.38
7/5VX1120	7	112	2845	113.36	2879.3	9.87
7/5VX1180	7	118	2997	119.36	3031.7	10.43
7/5VX1250	7	125	3175	126.36	3209.5	11.06
7/5VX1320	7	132	3353	133.36	3387.3	11.62
7/5VX1400	7	140	3556	141.36	3590.5	12.39
7/5VX1500	7	150	3810	151.36	3844.5	13.23
7/5VX1600	7	160	4064	161.36	4098.5	14.14
7/5VX1700	7	170	4318	171.36	4352.5	14.98
7/5VX1800	7	180	4572	181.36	4606.5	15.89
7/5VX1900	7	190	4826	191.36	4860.5	16.8
7/5VX2000	7	200	5080	201.36	5114.5	17.64
8/5VX500	8	50	1270	51.36	1304.5	5.04
8/5VX530	8	53	1346	54.36	1380.7	5.36
8/5VX560	8	56	1422	57.36	1456.9	5.68
8/5VX600	8	60	1524	61.36	1558.5	6.08
8/5VX630	8	63	1600	64.36	1634.7	6.32
8/5VX670	8	67	1702	68.36	1736.3	6.72
8/5VX710	8	71	1803	72.36	1837.9	7.2
8/5VX750	8	75	1905	76.36	1939.5	7.6
8/5VX800	8	80	2032	81.36	2066.5	8.08
8/5VX850	8	85	2159	86.36	2193.5	8.56
8/5VX900	8	90	2286	91.36	2320.5	9.04
8/5VX950	8	95	2413	96.36	2447.5	9.6
8/5VX1000	8	100	2540	101.36	2574.5	10.08
8/5VX1060	8	106	2692	107.36	2726.9	10.72

BANDED NARROW COGGED 3VX, 5VX V-BELT



5VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
8/5VX1120	8	112	2845	113.36	2879.3	11.28
8/5VX1180	8	118	2997	119.36	3031.7	11.92
8/5VX1250	8	125	3175	126.36	3209.5	12.64
8/5VX1320	8	132	3353	133.36	3387.3	13.28
8/5VX1400	8	140	3556	141.36	3590.5	14.16
8/5VX1500	8	150	3810	151.36	3844.5	15.12
8/5VX1600	8	160	4064	161.36	4098.5	16.16
8/5VX1700	8	170	4318	171.36	4352.5	17.12
8/5VX1800	8	180	4572	181.36	4606.5	18.16
8/5VX1900	8	190	4826	191.36	4860.5	19.2
8/5VX2000	8	200	5080	201.36	5114.5	20.16
9/5VX500	9	50	1270	51.36	1304.5	5.67
9/5VX530	9	53	1346	54.36	1380.7	6.03
9/5VX560	9	56	1422	57.36	1456.9	6.39
9/5VX600	9	60	1524	61.36	1558.5	6.84
9/5VX630	9	63	1600	64.36	1634.7	7.11
9/5VX670	9	67	1702	68.36	1736.3	7.56
9/5VX710	9	71	1803	72.36	1837.9	8.1
9/5VX750	9	75	1905	76.36	1939.5	8.55
9/5VX800	9	80	2032	81.36	2066.5	9.09
9/5VX850	9	85	2159	86.36	2193.5	9.63
9/5VX900	9	90	2286	91.36	2320.5	10.17
9/5VX950	9	95	2413	96.36	2447.5	10.8
9/5VX1000	9	100	2540	101.36	2574.5	11.34
9/5VX1060	9	106	2692	107.36	2726.9	12.06
9/5VX1120	9	112	2845	113.36	2879.3	12.69
9/5VX1180	9	118	2997	119.36	3031.7	13.41
9/5VX1250	9	125	3175	126.36	3209.5	14.22
9/5VX1320	9	132	3353	133.36	3387.3	14.94
9/5VX1400	9	140	3556	141.36	3590.5	15.93
9/5VX1500	9	150	3810	151.36	3844.5	17.01
9/5VX1600	9	160	4064	161.36	4098.5	18.18
9/5VX1700	9	170	4318	171.36	4352.5	19.26
9/5VX1800	9	180	4572	181.36	4606.5	20.43
9/5VX1900	9	190	4826	191.36	4860.5	21.6
9/5VX2000	9	200	5080	201.36	5114.5	22.68
10/5VX500	10	50	1270	51.36	1304.5	6.3
10/5VX530	10	53	1346	54.36	1380.7	6.7
10/5VX560	10	56	1422	57.36	1456.9	7.1
10/5VX600	10	60	1524	61.36	1558.5	7.6
10/5VX630	10	63	1600	64.36	1634.7	7.9
10/5VX670	10	67	1702	68.36	1736.3	8.4
10/5VX710	10	71	1803	72.36	1837.9	9
10/5VX750	10	75	1905	76.36	1939.5	9.5
10/5VX800	10	80	2032	81.36	2066.5	10.1
10/5VX850	10	85	2159	86.36	2193.5	10.7
10/5VX900	10	90	2286	91.36	2320.5	11.3

5VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (Inches)	Outside Circumference (mm)	Weight (Lbs)
10/5VX950	10	95	2413	96.36	2447.5	12
10/5VX1000	10	100	2540	101.36	2574.5	12.6
10/5VX1060	10	106	2692	107.36	2726.9	13.4
10/5VX1120	10	112	2845	113.36	2879.3	14.1
10/5VX1180	10	118	2997	119.36	3031.7	14.9
10/5VX1250	10	125	3175	126.36	3209.5	15.8
10/5VX1320	10	132	3353	133.36	3387.3	16.6
10/5VX1400	10	140	3556	141.36	3590.5	17.7
10/5VX1500	10	150	3810	151.36	3844.5	18.9
10/5VX1600	10	160	4064	161.36	4098.5	20.2
10/5VX1700	10	170	4318	171.36	4352.5	21.4
10/5VX1800	10	180	4572	181.36	4606.5	22.7
10/5VX1900	10	190	4826	191.36	4860.5	24
10/5VX2000	10	200	5080	201.36	5114.5	25.2
11/5VX500	11	50	1270	51.36	1304.5	6.93
11/5VX530	11	53	1346	54.36	1380.7	7.37
11/5VX560	11	56	1422	57.36	1456.9	7.81
11/5VX600	11	60	1524	61.36	1558.5	8.36
11/5VX630	11	63	1600	64.36	1634.7	8.69
11/5VX670	11	67	1702	68.36	1736.3	9.24
11/5VX710	11	71	1803	72.36	1837.9	9.9
11/5VX750	11	75	1905	76.36	1939.5	10.45
11/5VX800	11	80	2032	81.36	2066.5	11.11
11/5VX850	11	85	2159	86.36	2193.5	11.77
11/5VX900	11	90	2286	91.36	2320.5	12.43
11/5VX950	11	95	2413	96.36	2447.5	13.2
11/5VX1000	11	100	2540	101.36	2574.5	13.86
11/5VX1060	11	106	2692	107.36	2726.9	14.74
11/5VX1120	11	112	2845	113.36	2879.3	15.51
11/5VX1180	11	118	2997	119.36	3031.7	16.39
11/5VX1250	11	125	3175	126.36	3209.5	17.38
11/5VX1320	11	132	3353	133.36	3387.3	18.26
11/5VX1400	11	140	3556	141.36	3590.5	19.47
11/5VX1500	11	150	3810	151.36	3844.5	20.79
11/5VX1600	11	160	4064	161.36	4098.5	22.22
11/5VX1700	11	170	4318	171.36	4352.5	23.54
11/5VX1800	11	180	4572	181.36	4606.5	24.97
11/5VX1900	11	190	4826	191.36	4860.5	26.4
11/5VX2000	11	200	5080	201.36	5114.5	27.72
12/5VX500	12	50	1270	51.36	1304.5	7.56
12/5VX530	12	53	1346	54.36	1380.7	8.04
12/5VX560	12	56	1422	57.36	1456.9	8.52
12/5VX600	12	60	1524	61.36	1558.5	9.12
12/5VX630	12	63	1600	64.36	1634.7	9.48
12/5VX670	12	67	1702	68.36	1736.3	10.08
12/5VX710	12	71	1803	72.36	1837.9	10.8
12/5VX750	12	75	1905	76.36	1939.5	11.4

BANDED NARROW COGGED 3VX, 5VX V-BELT

5VX continue

Belt No	Ribs No	Effective Length (Inches)	Effective Length (mm)	Outside Circumference (inches)	Outside Circumference (mm)	Weight (Lbs)
12/5VX800	12	80	2032	81.36	2066.5	12.12
12/5VX850	12	85	2159	86.36	2193.5	12.84
12/5VX900	12	90	2286	91.36	2320.5	13.56
12/5VX950	12	95	2413	96.36	2447.5	14.4
12/5VX1000	12	100	2540	101.36	2574.5	15.12
12/5VX1060	12	106	2692	107.36	2726.9	16.08
12/5VX1120	12	112	2845	113.36	2879.3	16.92
12/5VX1180	12	118	2997	119.36	3031.7	17.88
12/5VX1250	12	125	3175	126.36	3209.5	18.96
12/5VX1320	12	132	3353	133.36	3387.3	19.92
12/5VX1400	12	140	3556	141.36	3590.5	21.24
12/5VX1500	12	150	3810	151.36	3844.5	22.68
12/5VX1600	12	160	4064	161.36	4098.5	24.24
12/5VX1700	12	170	4318	171.36	4352.5	25.68
12/5VX1800	12	180	4572	181.36	4606.5	27.24
12/5VX1900	12	190	4826	191.36	4860.5	28.8
12/5VX2000	12	200	5080	201.36	5114.5	30.24
13/5VX500	13	50	1270	51.36	1304.5	8.19
13/5VX530	13	53	1346	54.36	1380.7	8.71
13/5VX560	13	56	1422	57.36	1456.9	9.23
13/5VX600	13	60	1524	61.36	1558.5	9.88
13/5VX630	13	63	1600	64.36	1634.7	10.27
13/5VX670	13	67	1702	68.36	1736.3	10.92
13/5VX710	13	71	1803	72.36	1837.9	11.7
13/5VX750	13	75	1905	76.36	1939.5	12.35
13/5VX800	13	80	2032	81.36	2066.5	13.13
13/5VX850	13	85	2159	86.36	2193.5	13.91
13/5VX900	13	90	2286	91.36	2320.5	14.69
13/5VX950	13	95	2413	96.36	2447.5	15.6
13/5VX1000	13	100	2540	101.36	2574.5	16.38
13/5VX1060	13	106	2692	107.36	2726.9	17.42
13/5VX1120	13	112	2845	113.36	2879.3	18.33
13/5VX1180	13	118	2997	119.36	3031.7	19.37
13/5VX1250	13	125	3175	126.36	3209.5	20.54
13/5VX1320	13	132	3353	133.36	3387.3	21.58
13/5VX1400	13	140	3556	141.36	3590.5	23.01
13/5VX1500	13	150	3810	151.36	3844.5	24.57
13/5VX1600	13	160	4064	161.36	4098.5	26.26
13/5VX1700	13	170	4318	171.36	4352.5	27.82
13/5VX1800	13	180	4572	181.36	4606.5	29.51
13/5VX1900	13	190	4826	191.36	4860.5	31.2
13/5VX2000	13	200	5080	201.36	5114.5	32.76

*Additional Length May Be Available.
Contact us for more information.




TRAPEZOIDAL TIMING BELTS MXL, XL, L, H, XH, XXH PROFILE



A trapezoidal synchronous belt is a type of power transmission belt that features a trapezoidal tooth profile on its inner surface. These belts are designed for use in synchronous or positive drive systems where the teeth of the belt mesh with corresponding grooves on the pulley, ensuring a positive engagement and precise power transmission.

BELT CONSTRUCTION MXL / XL / L / H / XH / XXH

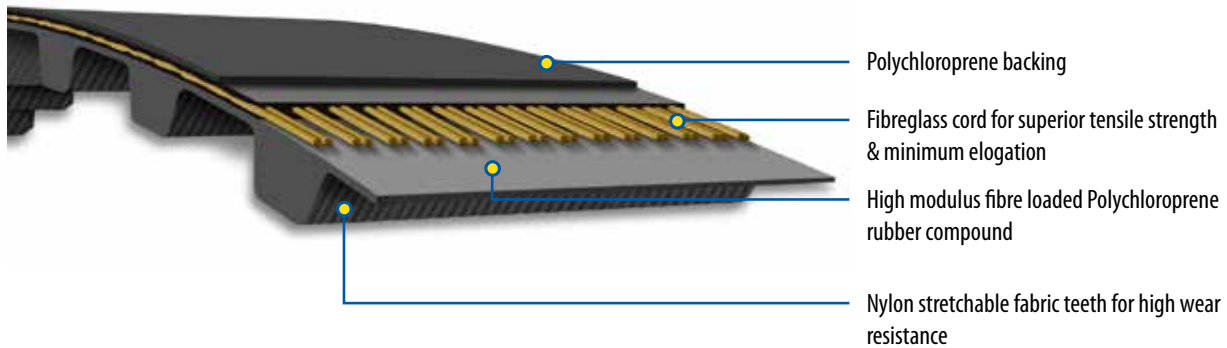

FEATURES & BENEFITS


- The positive engagement of the trapezoidal teeth with the pulley grooves ensures accurate and reliable power transmission. Suitable for applications where precision is critical.
- The design of trapezoidal synchronous belts, with smooth engagement and minimal vibration, leads to quiet operation.
- Resistant to wear and abrasion, leading to an extended service life.
- **TEMPERATURE RANGE:**
-22°F to +212°F / 30°C to +100°C.

BELT PART NUMBER NOMENCLATURE

300L050
300 - Pitch Length in tenths of inch (30.0")
L - 0.375" Pitch
050 - Belt Width in inches (0.5")


Profile	Pitch (Inches)	Teeth	Pitch Length (inches)	From Width (Inches)	To Width (Inches)
TRAPEZOIDAL TIMING BELTS					
MXL	0.080	113	9.0	0.12	0.19
XL	0.200	50	10.0	0.25	0.01
L	0.375	33	12.4	0.5	0.02
H	0.500	48	24.0	0.75	0.1
XH	0.875	144	126.0	2	4.12
XXH	1.25	000	000	000	000

*Additional Length May Be Available.
Contact us for more information.

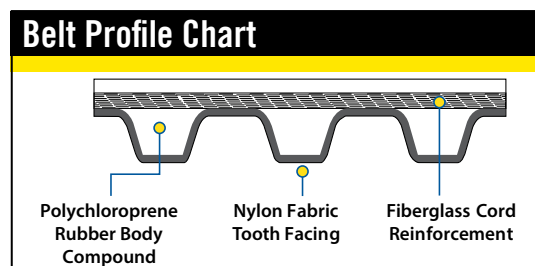


Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry.
Copyright 2023 The Goodyear Tire & Rubber Company


TRAPEZOIDAL TIMING BELTS MXL, XL, L, H, XH, XXH PROFILE

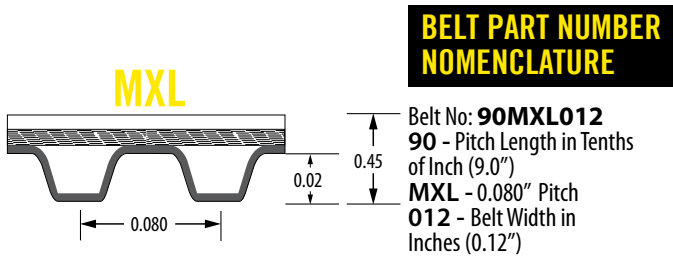

MXL				
Belt No	Teeth	Pitch Length (inches)	Top Width (Inches)	Weight (Lbs)
90MXL012	113	9.0	0.12	0.01
90MXL019	113	9.0	0.19	0.01

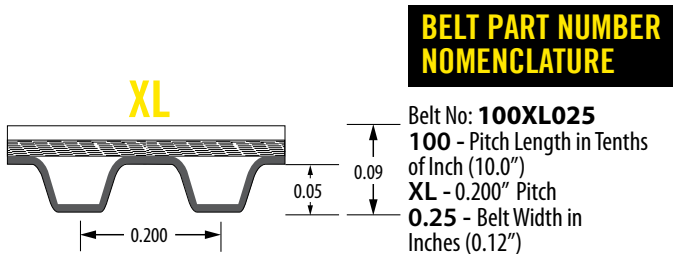


XL				
Belt No	Teeth	Pitch Length (inches)	Top Width (Inches)	Weight (Lbs)
100XL025	50	10.0	0.25	0.01
100XL037	50	10.0	0.37	0.01
110XL025	55	11.0	0.25	0.01
110XL037	55	11.0	0.37	0.01
110XL050	55	11.0	0.50	0.01
120XL025	60	12.0	0.25	0.01
120XL037	60	12.0	0.37	0.03
130XL037	65	13	0.37	0.02
150XL025	75	15.0	0.25	0.01
150XL037	75	15.0	0.37	0.02
160XL025	80	16.0	0.25	0.01
160XL037	80	16.0	0.37	0.02
190XL025	95	19.0	0.25	0.02
190XL037	95	19.0	0.37	0.02
220XL025	110	22.0	0.25	0.02
220XL037	110	22.0	0.37	0.03
250XL025	125	25.0	0.25	0.02
250XL037	125	25.0	0.37	0.03
250XL200	125	25.0	2	0.04
290XL025	145	29.0	0.25	0.02
290XL037	145	29.0	0.37	0.03

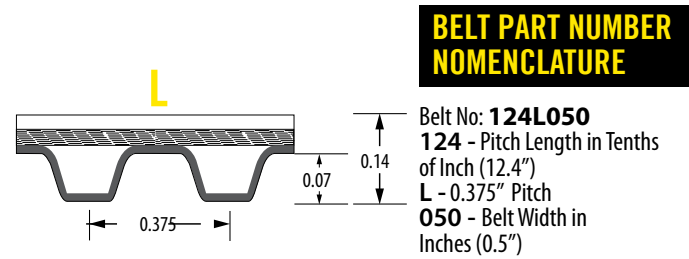

L				
Belt No	Teeth	Pitch Length (inches)	Top Width (Inches)	Weight (Lbs)
124L050	33	12.4	0.5	0.02
124L075	33	12.4	0.75	0.03
124L100	33	12.4	1	0.04
150L050	40	15.0	0.5	0.02
150L075	40	15.0	0.75	0.03
150L100	40	15.0	1	0.04
187L050	50	18.7	0.5	0.03
187L075	50	18.7	0.75	0.04
187L100	50	18.7	1	0.06
195L050	52	19.50	0.5	0.04
195L100	52	19.50	1	0.05
210L050	56	21.0	0.5	0.03
210L100	56	21.0	1	0.05
225L050	60	22.5	0.5	0.03
225L075	60	22.5	0.75	0.05
225L100	60	22.5	1	0.07
240L050	64	24.0	0.5	0.04
240L075	64	24.0	0.75	0.05
240L100	64	24.0	1	0.07
255L050	68	25.5	0.5	0.04
255L075	68	25.5	0.75	0.06
255L100	68	25.5	1	0.08
270L050	72	27.0	0.5	0.04
270L075	72	27.0	0.75	0.06
270L100	72	27.0	1	0.08
285L050	76	28.5	0.5	0.04
285L075	76	28.5	0.75	0.06
285L100	76	28.5	1	0.08
345L050	92	34.5	0.5	0.05
345L075	92	34.5	0.75	0.08
345L100	92	34.5	1	0.1
367L050	98	36.70	0.5	0.05
367L750	98	36.70	7.5	0.75
510L050	136	51.0	0.5	0.13
510L075	136	51.0	0.75	0.19
510L100	136	51.0	1	0.26

TRAPEZOIDAL TIMING BELTS MXL, XL, L, H, XH, XXH PROFILE

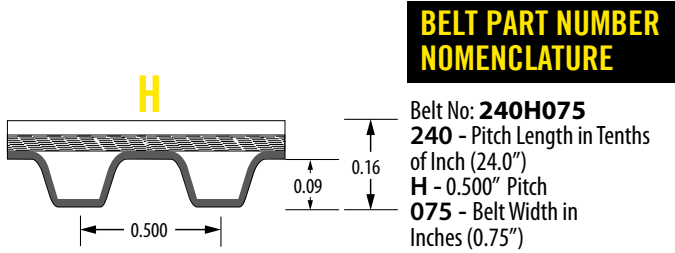

H				
Belt No	Teeth	Pitch Length (inches)	Top Width (Inches)	Weight (Lbs)
240H075	48	24.0	0.75	0.1
240H100	48	24.0	1	0.13
240H150	48	24.0	1.5	0.2
240H200	48	24.0	2	0.27
240H300	48	24.0	3	0.48
300H075	60	30.0	0.75	0.13
300H100	60	30.0	1	0.17
300H150	60	30.0	1.5	0.25
300H200	60	30.0	2	0.34
300H300	60	30.0	3	0.6
330H075	66	33.0	0.75	0.14
330H100	66	33.0	1	0.19
330H150	66	33.0	1.5	0.28
330H200	66	33.0	2	0.37
330H300	66	33.0	3	0.66
360H075	72	36.0	0.75	0.15
360H100	72	36.0	1	0.2
360H150	72	36.0	1.5	0.3
360H200	72	36.0	2	0.4
360H300	72	36.0	3	0.72
390H075	78	39.0	0.75	0.16
390H100	78	39.0	1	0.22
390H150	78	39.0	1.5	0.33
390H200	78	39.0	2	0.44
390H300	78	39.0	3	0.78
400H075	80	40.0	0.75	0.2
400H100	80	40.0	1	0.27
400H150	80	40.0	1.5	0.4
400H200	80	40.0	2	0.53
400H300	80	40.0	3	0.8
450H075	90	45.0	0.75	0.19
450H100	90	45.0	1	0.25
450H150	90	45.0	1.5	0.38
450H200	90	45.0	2	0.51
450H300	90	45.0	3	0.9
510H075	102	51.0	0.75	0.22
510H100	102	51.0	1	0.29
510H150	102	51.0	1.5	0.43
510H200	102	51.0	2	0.57


H				
Belt No	Teeth	Pitch Length (inches)	Top Width (Inches)	Weight (Lbs)
510H300	102	51.0	3	1.02
600H075	120	60.0	0.75	0.25
600H100	120	60.0	1	0.34
600H150	120	60.0	1.5	0.51
600H200	120	60.0	2	0.67
600H300	120	60.0	3	1.19
650H100	130	65	1	0.32
660H075	132	66.0	0.75	0.28
660H100	132	66.0	1	0.37
660H150	132	66.0	1.5	0.56
660H200	132	66.0	2	0.74
660H300	132	66.0	3	1.31
700H075	140	70.0	0.75	0.3
700H100	140	70.0	1	0.39
700H150	140	70.0	1.5	0.59
700H200	140	70.0	2	0.79
700H300	140	70.0	3	1.39
725H100	145	72.50	1	0.41
730H075	146	73.0	0.75	0.36
730H100	146	73.0	1	0.48
730H150	146	73.0	1.5	0.73
730H200	146	73.0	2	0.97
730H300	146	73.0	3	1.49
750H075	150	75.0	0.75	0.32
750H100	150	75.0	1	0.42
750H150	150	75.0	1.5	0.63
750H200	150	75.0	2	0.84
750H300	150	75.0	3	1.49
800H075	160	80.0	0.75	0.34
800H100	160	80.0	1	0.45
800H150	160	80.0	1.5	0.67
800H200	160	80.0	2	0.9
800H300	160	80.0	3	1.59
850H075	170	85.0	0.75	0.36
850H100	170	85.0	1	0.48
850H150	170	85.0	1.5	0.72
850H200	170	85.0	2	0.96
850H300	170	85.0	3	1.69
900H075	180	90.0	0.75	0.38
900H100	180	90.0	1	0.51
900H150	180	90.0	1.5	0.76
850H200	170	85.0	2	0.96
850H300	170	85.0	3	1.69
900H075	180	90.0	0.75	0.38
900H100	180	90.0	1	0.51
900H150	180	90.0	1.5	0.76
900H200	180	90.0	2	1.01

TRAPEZOIDAL TIMING BELTS MXL, XL, L, H, XH, XXH PROFILE

H				
Belt No	Teeth	Pitch Length (inches)	Top Width (Inches)	Weight (Lbs)
900H300	180	90.0	3	1.79
950H075	190	95.0	0.75	0.48
950H100	190	95.0	1	0.64
950H150	190	95.0	1.5	0.96
950H200	190	95.0	2	1.27
950H300	190	95.0	3	1.91
1000H075	200	100.0	0.75	0.42
1000H100	200	100.0	1	0.56
1000H150	200	100.0	1.5	0.84
1000H200	200	100.0	2	1.12
1000H300	200	100.0	3	1.99
1100H075	220	110.0	0.75	0.46
1100H100	220	110.0	1	0.62
1100H150	220	110.0	1.5	0.93
900H200	180	90.0	2	1.01
900H300	180	90.0	3	1.79
950H075	190	95.0	0.75	0.48
950H100	190	95.0	1	0.64
950H150	190	95.0	1.5	0.96
950H200	190	95.0	2	1.27
950H300	190	95.0	3	1.91
1000H075	200	100.0	0.75	0.42
1000H100	200	100.0	1	0.56
1000H150	200	100.0	1.5	0.84
1000H200	200	100.0	2	1.12
1000H300	200	100.0	3	1.99
1100H075	220	110.0	0.75	0.46
1100H100	220	110.0	1	0.62
1100H150	220	110.0	1.5	0.93
1100H200	220	110.0	2	1.24
1100H300	220	110.0	3	2.19
1120H150	224	112	1.5	0.94
1140H075	228	114.0	0.75	0.48
1140H100	228	114.0	1	0.64
1140H150	228	114.0	1.5	0.96
1140H200	228	114.0	2	1.28
1140H300	228	114.0	3	2.27
1150H100	230	115	1	0.65
1150H150	230	115	1.5	0.97
1250H075	250	125.0	0.75	0.53
1250H100	250	125.0	1	0.7
1250H150	250	125.0	1.5	1.05
1250H200	250	125.0	2	1.41
1250H300	250	125.0	3	2.49
1400H075	280	140.0	0.75	0.59
1400H100	280	140.0	1	0.79
1400H150	280	140.0	1.5	1.18

H				
Belt No	Teeth	Pitch Length (inches)	Top Width (Inches)	Weight (Lbs)
1400H200	280	140.0	2	1.57
1400H300	280	140.0	3	2.79
1700H075	340	170.0	0.75	0.72
1700H100	340	170.0	1	0.96
1700H150	340	170.0	1.5	1.43
1700H200	340	170.0	2	1.91
1700H300	340	170.0	3	3.39

BELT PART NUMBER NOMENCLATURE

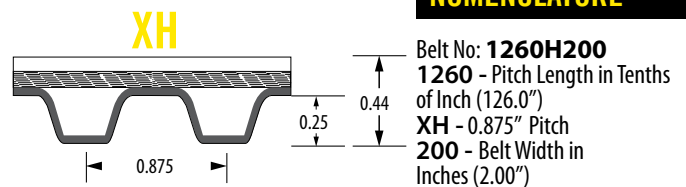


XH				
Belt No	Teeth	Pitch Length (inches)	Top Width (Inches)	Weight (Lbs)
1260XH200	144	126.0	2	4.12
1260XH300	144	126.0	3	6.17
1260XH400	144	126.0	4	8.23

*Additional Length May Be Available.
Contact us for more information.



HTD, or “High Torque Drive,” is a type of tooth profile used in synchronous belts, and HTD synchronous belts are designed for high torque transmission. These belts are part of the synchronous or positive drive system, where the teeth of the belt engage with corresponding grooves on the pulley to ensure accurate and synchronous power transmission.

BELT CONSTRUCTION 5M / 8M / 14M

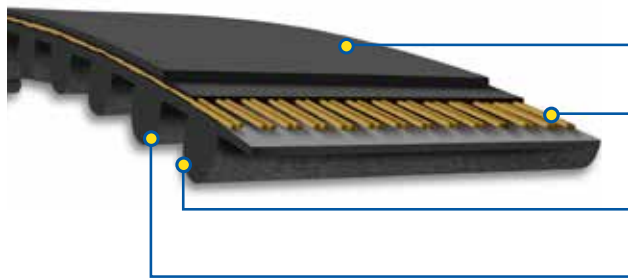

- Polychloroprene backing
- Fibreglass cord for superior tensile strength & minimum elongation
- High modulus fibre loaded Polychloroprene rubber compound
- Nylon stretchable fabric teeth for high wear resistance

FEATURES & BENEFITS


- Improved design for increased power rating over trapezoidal profiles allows for narrower belts.
- Non-slip operation for higher efficiency than V-belts.
- Less noise generation as compared to comparable trapezoidal timing belts.
- **TEMPERATURE RANGE:**
-22°F to +212°F / -30°C to +100°C

BELT PART NUMBER NOMENCLATURE

- 520-8M-20**
- 520** - Pitch Length (mm)
- 8M** - 8mm Pitch
- 20** - Belt Width (mm)


Profile	Pitch (mm)	Teeth	Pitch Length (mm)	From Width (mm)
HTD SYNCHRONOUS BELTS				
5M	5	40 - 400	200 - 2000	9- 50
8M	8	145- 450	1160- 3600	20 - 85
14M	14	127 - 410	1778 - 5740	40 - 170

*Additional Length May Be Available. Contact us for more information.

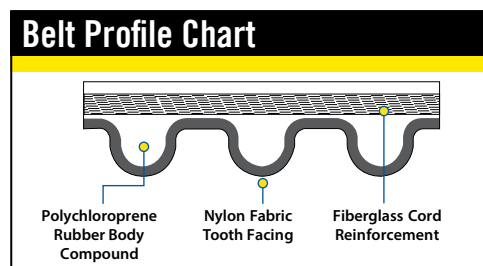

Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry. Copyright 2023 The Goodyear Tire & Rubber Company

HTD SYNCHRONOUS BELT

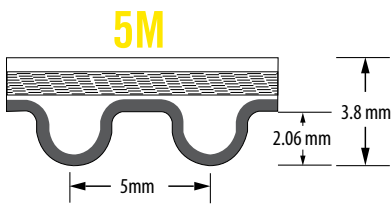

BELT PART NUMBER NOMENCLATURE


Belt No: **200-5M-25**
200 - Pitch length (mm)
5M - 5 (mm) Pitch
25 - Belt Width (mm)

5M

Belt No	Teeth	Pitch Length (mm)	Top Width (mm)	Weight (Lbs)
200-5M-15	40	200	15	0.03
200-5M-25	40	200	25	0.04
200-5M-9	40	200	9	0.02
425-5M-15	85	425	15	0.06
425-5M-25	85	425	25	0.09
425-5M-9	85	425	9	0.03
535-5M-15	107	535	15	0.07
535-5M-25	107	535	25	0.12
535-5M-9	107	535	9	0.04
575-5M-50	115	575	50	0.25
575-5M-9	115	575	9	0.05
600-5M-15	120	600	15	0.08
600-5M-25	120	600	25	0.13
600-5M-9	120	600	9	0.05
665-5M-15	133	665	15	0.09
665-5M-25	133	665	25	0.15
665-5M-9	133	665	9	0.05
765-5M-15	153	765	15	0.1
765-5M-25	153	765	25	0.17
765-5M-9	153	765	9	0.06
870-5M-15	174	870	15	0.12
870-5M-25	174	870	25	0.19
870-5M-9	174	870	9	0.07
890-5M-15	178	890	15	0.12
890-5M-25	178	890	25	0.2
1050-5M-15	210	1050	15	0.14
1050-5M-25	210	1050	25	0.23
1050-5M-9	210	1050	9	0.08
1195-5M-15	239	1195	15	0.16
1195-5M-25	239	1195	25	0.26
1195-5M-9	239	1195	9	0.09
1595-5M-15	319	1595	15	0.21
1595-5M-25	319	1595	25	0.35
1595-5M-9	319	1595	9	0.13
1690-5M-15	338	1690	15	0.22
1690-5M-25	338	1690	25	0.37
1690-5M-9	338	1690	9	0.13
2000-5M-15	400	2000	15	0.28
2000-5M-25	400	2000	25	0.46
2000-5M-9	400	2000	9	0.17

5M

Belt No	Teeth	Pitch Length (mm)	Top Width (mm)	Weight (Lbs)
890-5M-9	178	890	9	0.07
950-5M-15	190	950	15	0.13
950-5M-25	190	950	25	0.21
950-5M-9	190	950	9	0.08

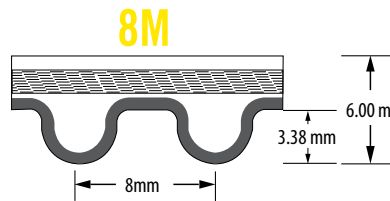

BELT PART NUMBER NOMENCLATURE

Belt No: **384-8M-20**
384 - Pitch Length (mm)
8M - 8 (mm) Pitch
20 - Belt Width (mm)

8M

Belt No	Teeth	Pitch Length (mm)	Top Width (mm)	Weight (Lbs)
384-8M-20	48	384	20	0.11
384-8M-30	48	384	30	0.16
384-8M-50	48	384	50	0.27
384-8M-85	48	384	85	0.47
896-8M-20	112	896	20	0.26
896-8M-30	112	896	30	0.38
896-8M-50	112	896	50	0.64
896-8M-85	112	896	85	1.09
920-8M-20	115	920	20	0.26
920-8M-30	115	920	30	0.39
920-8M-50	115	920	50	0.66
920-8M-85	115	920	85	1.12
1160-8M-20	145	1160	20	0.33
1160-8M-30	145	1160	30	0.5
1160-8M-50	145	1160	50	0.83
1160-8M-85	145	1160	85	1.41
1480-8M-20	185	1480	20	0.42
1480-8M-30	185	1480	30	0.63
1480-8M-50	185	1480	50	1.05
1480-8M-85	185	1480	85	1.78
2000-8M-20	250	2000	20	0.57
2000-8M-30	250	2000	30	0.86
2000-8M-50	250	2000	50	1.43
2000-8M-85	250	2000	85	2.43
2200-8M-20	275	2200	20	0.63
2200-8M-30	275	2200	30	0.94
2200-8M-50	275	2200	50	1.57
2200-8M-85	275	2200	85	2.67
2600-8M-20	325	2600	20	0.74
2600-8M-30	325	2600	30	1.11
2600-8M-50	325	2600	50	1.86


HTD SYNCHRONOUS BELTS



8M				
Belt No	Teeth	Pitch Length (mm)	Top Width (mm)	Weight (Lbs)
2600-8M-85	325	2600	85	3.16
3048-8M-20	381	3048	20	0.87
3048-8M-30	381	3048	30	1.31
3048-8M-50	381	3048	50	2.18
3048-8M-85	381	3048	85	3.7
3280-8M-20	410	3280	20	0.94
3280-8M-30	410	3280	30	1.41
3280-8M-50	410	3280	50	2.34
3280-8M-85	410	3280	85	3.98
3600-8M-20	450	3600	20	1.03
3600-8M-30	450	3600	30	1.54
3600-8M-50	450	3600	50	2.57
3600-8M-85	450	3600	85	4.37
4400-8M-30	550	4400	30	1.89
4400-8M-50	550	4400	50	3.14

14M				
Belt No	Teeth	Pitch Length (mm)	Top Width (mm)	Weight (Lbs)
5740-14M-115	410	5740	115	15.5
5740-14M-170	410	5740	170	23.28
5740-14M-40	410	5740	40	5.47
5740-14M-55	410	5740	55	7.53
5740-14M-85	410	5740	85	11.64
1890-14M-55	135	1890	55	2.48
1890-14M-85	135	1890	85	3.83
2310-14M-115	165	2310	115	6.33
2310-14M-170	165	2310	170	9.36
2310-14M-40	165	2310	40	2.2
2310-14M-55	165	2310	55	3.03
2310-14M-85	165	2310	85	4.68
5320-14M-115	380	5320	115	14.96
5320-14M-170	380	5320	170	21.57

*Additional Length May Be Available.
Contact us for more information.

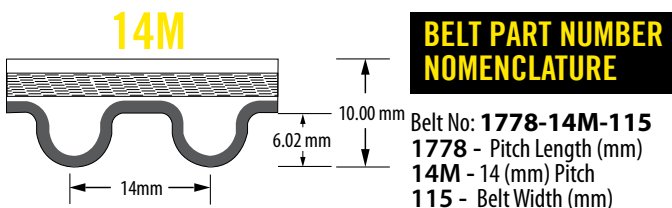


14M				
Belt No	Teeth	Pitch Length (mm)	Top Width (mm)	Weight (Lbs)
1778-14M-115	127	1778	115	4.87
1778-14M-170	127	1778	170	7.2
1778-14M-40	127	1778	40	1.7
1778-14M-55	127	1778	55	2.33
1778-14M-85	127	1778	85	3.6
1890-14M-115	135	1890	115	5.18
1890-14M-170	135	1890	170	7.66
1890-14M-40	135	1890	40	1.8
1890-14M-55	135	1890	55	2.48
1890-14M-85	135	1890	85	3.83
2310-14M-115	165	2310	115	6.33
2310-14M-170	165	2310	170	9.36
2310-14M-40	165	2310	40	2.2
2310-14M-55	165	2310	55	3.03
2310-14M-85	165	2310	85	4.68
5320-14M-115	380	5320	115	14.96
5320-14M-170	380	5320	170	21.57
5320-14M-40	380	5320	40	5.07
5320-14M-55	380	5320	55	6.98
5320-14M-85	380	5320	85	10.79



Goodyear RPP (Rounded Tooth Profile) timing belts are another type of synchronous timing belt used in various applications that require precise motion control and power transmission. Like HTD belts, RPP timing belts feature a curvilinear tooth profile, which provides several advantages over traditional trapezoidal timing belts.

BELT CONSTRUCTION 5M / 8M / 14M

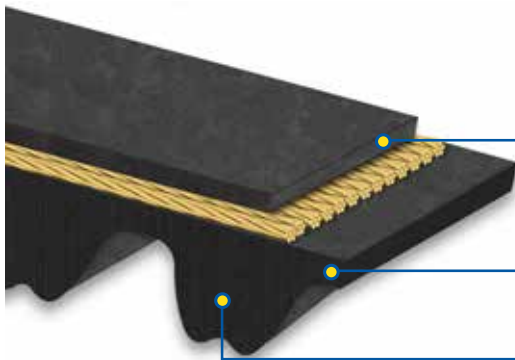

The body is made from an innovative rubber compound, reinforced with a special fiber; hardness 74 ShA.

Continuous helically wound fiberglass cords form the tensile member of the belt.

A wear-resistant nylon fabric with self-lubricant capability covers the teeth surface.

FEATURES & BENEFITS


- The rounded tooth design reduces stress concentration and ensures smoother meshing, resulting in lower noise, reduced vibration, and enhanced power transmission efficiency.
- RPP timing belts are designed to handle high torque loads, making them suitable for heavy-duty applications.
- The curvilinear teeth distribute the load more evenly across the belt, enhancing its durability and performance.
- The rounded tooth profile minimizes wear on both the belt and the pulley, increasing the overall lifespan of the system.
- **TEMPERATURE RANGE:**
-65°F to +185°F / -54°C to +85°C.

BELT PART NUMBER NOMENCLATURE

400-5M-25
400 - Pitch Length (mm)
5M - 5mm Pitch
25 - Belt Width (mm)


Profile	Pitch (mm)	Teeth	Pitch Length (mm)	From Width (mm)
RPP SYNCHRONOUS BELTS				
5M	5	80 - 225	400 - 1125	9- 25
8M	8	130- 300	1040- 2400	20 - 85
14M	14	185 - 225	1190 - 3150	40 - 170

*Additional Length May Be Available. Contact us for more information.

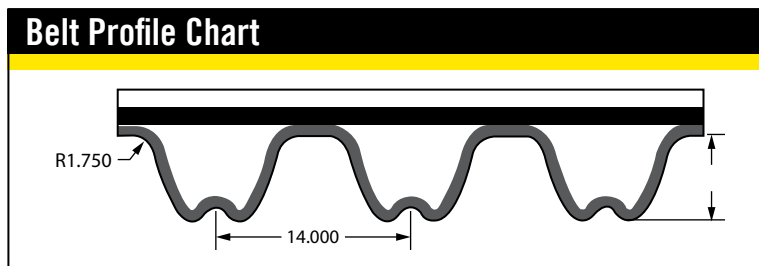


Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry. Copyright 2023 The Goodyear Tire & Rubber Company

RPP SYNCHRONOUS BELT

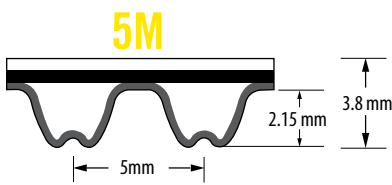

BELT PART NUMBER NOMENCLATURE

Belt No: **400-5M-15**
400 - Pitch Length (mm)
5M - 5(mm) Pitch
15 - Belt Width (mm)

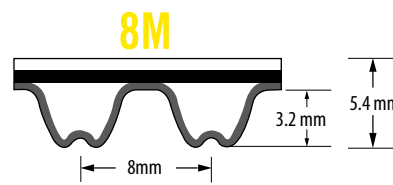

BELT PART NUMBER NOMENCLATURE


Belt No: **480-8M-20**
480 - Pitch Length (mm)
8M - 8 (mm) Pitch
20 - Belt Width (mm)

5M				
Belt No	Teeth	Pitch Length (mm)	Top Width (mm)	Weight (Lbs)
400-5M-15	80	400	15	0.05
400-5M-25	80	400	25	0.09
400-5M-9	80	400	9	0.03
450-5M-15	90	450	15	0.06
450-5M-25	90	450	25	0.1
450-5M-9	90	450	9	0.04
475-5M-15	95	475	15	0.06
475-5M-25	95	475	25	0.11
475-5M-9	95	475	9	0.04
500-5M-15	100	500	15	0.07
500-5M-25	100	500	25	0.11
500-5M-9	100	500	9	0.04
565-5M-15	113	565	15	0.08
565-5M-25	113	565	25	0.13
565-5M-9	113	565	9	0.05
670-5M-15	134	670	15	0.09
670-5M-25	134	670	25	0.15
670-5M-9	134	670	9	0.05
710-5M-15	142	710	15	0.1
710-5M-25	142	710	25	0.16
710-5M-9	142	710	9	0.06
740-5M-15	148	740	15	0.1
740-5M-25	148	740	25	0.17
740-5M-9	148	740	9	0.06
800-5M-15	160	800	15	0.11
800-5M-25	160	800	25	0.18
800-5M-9	160	800	9	0.06
850-5M-15	170	850	15	0.11
850-5M-25	170	850	25	0.19
850-5M-9	170	850	9	0.07
1125-5M-15	225	1125	15	0.15

8M				
Belt No	Teeth	Pitch Length (mm)	Top Width (mm)	Weight (Lbs)
480-8M-20	60	480	20	0.14
480-8M-30	60	480	30	0.21
480-8M-50	60	480	50	0.34
480-8M-85	60	480	85	0.58
560-8M-20	70	560	20	0.16
560-8M-30	70	560	30	0.24
560-8M-50	70	560	50	0.4
560-8M-85	70	560	85	0.68
600-8M-20	75	600	20	0.17
600-8M-30	75	600	30	0.26
600-8M-50	75	600	50	0.43
600-8M-85	75	600	85	0.73
640-8M-20	80	640	20	0.18
640-8M-25	80	640	25	0.27
640-8M-30	80	640	30	0.27
640-8M-50	80	640	50	0.46
640-8M-85	80	640	85	0.78
720-8M-16	90	720	16	0.21
720-8M-20	90	720	20	0.21
720-8M-30	90	720	30	0.31
720-8M-50	90	720	50	0.51
720-8M-85	90	720	85	0.87
760-8M-15	95	760.0	15	0.22
760-8M-20	95	760.0	20	0.22
760-8M-30	95	760.0	30	0.33
760-8M-50	95	760.0	50	0.54
760-8M-85	95	760.0	85	0.92
800-8M-20	100	800	20	0.23
800-8M-30	100	800	30	0.34
800-8M-50	100	800	50	0.57
800-8M-85	100	800	85	0.97
840-8M-20	105	840	20	0.24
840-8M-30	105	840	30	0.36
840-8M-50	105	840	50	0.6
840-8M-85	105	840	85	1.02
880-8M-20	110	880	20	0.25
880-8M-30	110	880	30	0.38
880-8M-50	110	880	50	0.63
880-8M-85	110	880	85	1.07
960-8M-20	120	960	20	0.27

*Additional Length May Be Available.
 Contact us for more information.

8M				
Belt No	Teeth	Pitch Length (mm)	Top Width (mm)	Weight (Lbs)
960-8M-30	120	960	30	0.41
960-8M-50	120	960	50	0.69
960-8M-85	120	960	85	1.17
1040-8M-20	130	1040	20	0.3
1040-8M-30	130	1040	30	0.45
1040-8M-50	130	1040	50	0.74
1040-8M-85	130	1040	85	1.26
1120-8M-20	140	1120	20	0.32
1120-8M-30	140	1120	30	0.48
1120-8M-50	140	1120	50	0.8
1120-8M-85	140	1120	85	1.36
1200-8M-20	150	1200	20	0.34
1200-8M-30	150	1200	30	0.51
1200-8M-50	150	1200	50	0.86
1200-8M-85	150	1200	85	1.46
1224-8M-20	153	1224	20	0.35
1224-8M-30	153	1224	30	0.52
1224-8M-50	153	1224	50	0.87
1224-8M-85	153	1224	85	1.49
1280-8M-20	160	1280	20	0.37
1280-8M-30	160	1280	30	0.55
1280-8M-50	160	1280	50	0.91
1280-8M-85	160	1280	85	1.55
1440-8M-20	180	1440	20	0.41
1440-8M-30	180	1440	30	0.62
1440-8M-50	180	1440	50	1.03
1440-8M-85	180	1440	85	1.75
1600-8M-20	200	1600	20	0.46
1600-8M-30	200	1600	30	0.69
1600-8M-50	200	1600	50	1.14
1600-8M-85	200	1600	85	1.94
1760-8M-20	220	1760	20	0.48
1760-8M-30	220	1760	30	0.72
1760-8M-50	220	1760	50	1.2
1760-8M-85	220	1760	85	2.04
1800-8M-20	225	1800	20	0.51
1800-8M-30	225	1800	30	0.77
1800-8M-50	225	1800	50	1.29
1800-8M-85	225	1800	85	2.18
2400-8M-20	300	2400	20	0.69
2400-8M-30	300	2400	30	1.03
2400-8M-50	300	2400	50	1.71
2400-8M-85	300	2400	85	2.91
2800-8M-20	350	2800	20	0.8
2800-8M-30	350	2800	30	1.2
2800-8M-50	350	2800	50	2
2800-8M-85	350	2800	85	3.4

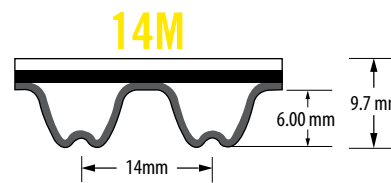

BELT PART NUMBER NOMENCLATURE

Belt No: **966-14M-115**
966 - Pitch Length (mm)
14M - 14 (mm) Pitch
115 - Belt Width (mm)

14M				
Belt No	Teeth	Pitch Length (mm)	Top Width (mm)	Weight (Lbs)
966-14M-115	69	966	115	2.65
966-14M-170	69	966	170	3.91
966-14M-40	69	966	40	0.92
966-14M-55	69	966	55	1.27
966-14M-85	69	966	85	1.96
1190-14M-115	85	1190	115	3.26
1190-14M-170	85	1190	170	4.82
1190-14M-40	85	1190	40	1.07
1190-14M-55	85	1190	55	1.56
1190-14M-85	85	1190	85	2.41
1400-14M-115	100	1400	115	3.84
1400-14M-170	100	1400	170	5.67
1400-14M-40	100	1400	40	1.33
1400-14M-55	100	1400	55	1.84
1400-14M-85	100	1400	85	2.84
1610-14M-115	115	1610	115	4.41
1610-14M-170	115	1610	170	6.52
1610-14M-40	115	1610	40	1.53
1610-14M-50	115	1610	50	2.11
1610-14M-55	115	1610	55	2.11
1610-14M-85	115	1610	85	3.26
2100-14M-115	150	2100	115	5.76
2100-14M-170	150	2100	170	8.51
2100-14M-40	150	2100	40	2
2100-14M-55	150	2100	55	2.75
2100-14M-85	150	2100	85	4.25
2450-14M-115	175	2450	115	6.72
2450-14M-170	175	2450	170	9.93
2450-14M-40	175	2450	40	2.34
2450-14M-55	175	2450	55	3.21
2450-14M-85	175	2450	85	4.96
2590-14M-115	185	2590	115	7.1
2590-14M-170	185	2590	170	10.49
2590-14M-40	185	2590	40	2.47
2590-14M-55	185	2590	55	3.4
2590-14M-85	185	2590	85	5.25
2800-14M-115	200	2800	115	7.67
2800-14M-170	200	2800	170	11.35
2800-14M-40	200	2800	40	2.67
2800-14M-55	200	2800	55	3.67

RPP SYNCHRONOUS BELT

14M

Belt No	Teeth	Pitch Length (mm)	Top Width (mm)	Weight (Lbs)
2800-14M-85	200	2800	85	5.67
3150-14M-115	225	3150	115	8.63
3150-14M-170	225	3150	170	12.76
3150-14M-40	225	3150	40	3
3150-14M-55	225	3150	55	4.13
3150-14M-85	225	3150	85	6.38
3360-14M-115	240	3360	115	9.21
3360-14M-170	240	3360	170	13.61
3360-14M-40	240	3360	40	3.2
3360-14M-55	240	3360	55	4.4
3360-14M-85	240	3360	85	6.81
3500-14M-115	250	3500	115	9.59
3500-14M-170	250	3500	170	14.18
3500-14M-40	250	3500	40	3.34
3500-14M-55	250	3500	55	4.59
3500-14M-85	250	3500	85	7.09
3850-14M-115	275	3850	115	10.55
3850-14M-170	275	3850	170	15.6
3850-14M-40	275	3850	40	3.67
3850-14M-55	275	3850	55	5.05
3850-14M-85	275	3850	85	7.8
4326-14M-115	309	4326	115	11.86
4326-14M-170	309	4326	170	17.53
4326-14M-40	309	4326	40	4.12
4326-14M-55	309	4326	55	5.67
4326-14M-85	309	4326	85	8.76

*Additional Length May Be Available.
Contact us for more information.





“Inspired by the Goodyear Spirit of Innovation”



CONTACT GOODYEAR BELTS FOR ALL YOUR POWER TRANSMISSION NEEDS.

Goodyear (and Winged Foot Design) and Blimp Design are trademarks of The Goodyear Tire & Rubber Company used under license by Adventry Corp.

Copyright 2023 The Goodyear Tire & Rubber Company

Toll Free (855) 492-3587 • info@goodyearbelts.com • goodyearbelts.com